WHO AM I？這傢伙是誰啊？JAZZ？

- 講者介紹：
  - 國網中心　王耀聰　副研究員 / 交大電控八九級碩士
  - jazz@nchc.org.tw
- 所有投影片、參考資料與操作步驟均在網路上
  - http://trac.nchc.org.tw/cloud
  - 由於雲端資訊變動太快，愛護地球，請減少不必要之列印。

FOSS 使用者
Debian/Ubutnu
Access Grid
Motion/VLC
Red5
Debian Router
DRBL/Clonezilla
Hadoop

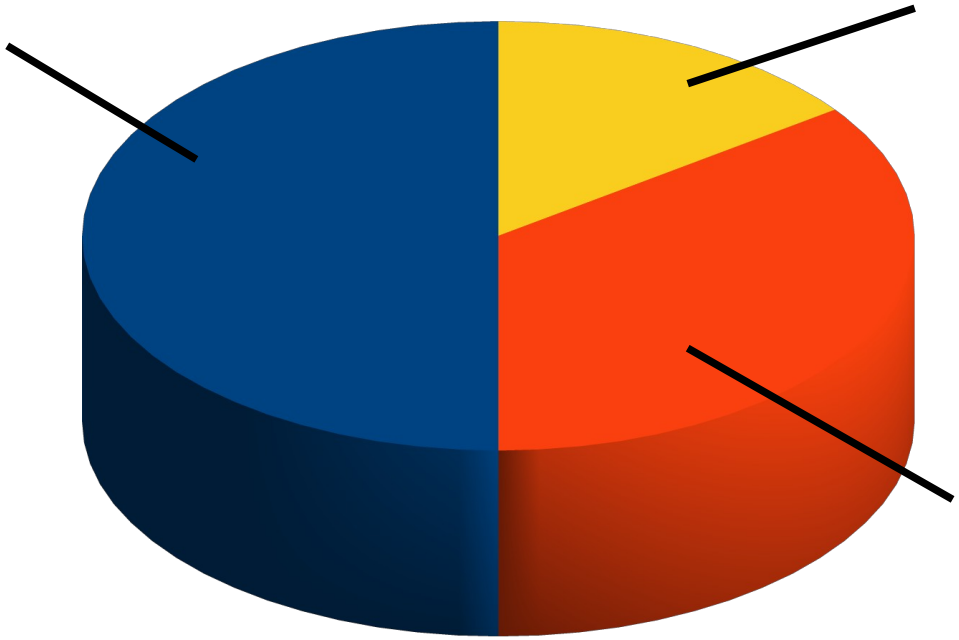

行動力薄弱的開發者
TRTC WSU/
Haduzilla /
Hadop4Win / Ezilla

推廣者
DRBL/Clonezilla
Partclone/Tuxboot
Hadoop Ecosystem

淺談巨量資料的趨勢、挑戰與因應對策

Big Data : the Trends, Challenges and Solutions

Jazz Wang

Yao-Tsung Wang

jazz@nchc.org.tw

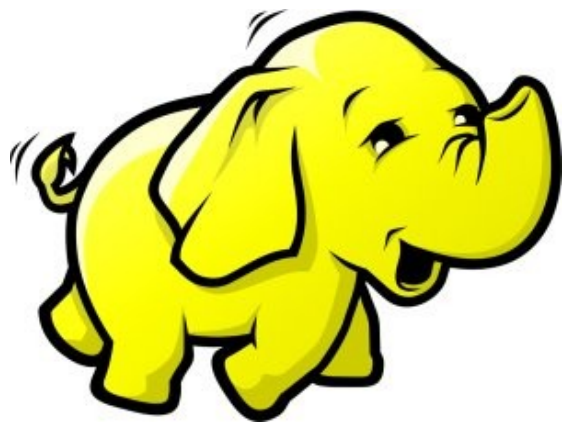

Agenda 演講大綱

What is Big Data ? 何謂巨量資料

Why should we care? 爲何需要關切

When to deploy it ? 何時導入技術

How to handle it ? 三大因應策略

Who is key player ? 誰是成功關鍵

WHAT

What is Big Data ?　何謂巨量資料

趨勢 Trends → 定義 Definitions → 挑戰：管理維度 The Six Dimensions

Source: http://www.2010taipeiexpo.tw/ct.asp?xItem=17186&CtNode=5952&mp=3

Trends …. It's all about Buzzwords ….. 「趨勢」亦或「流行語」？

Web 3.0, Cloud Computing, Social Network, Big Data, ….

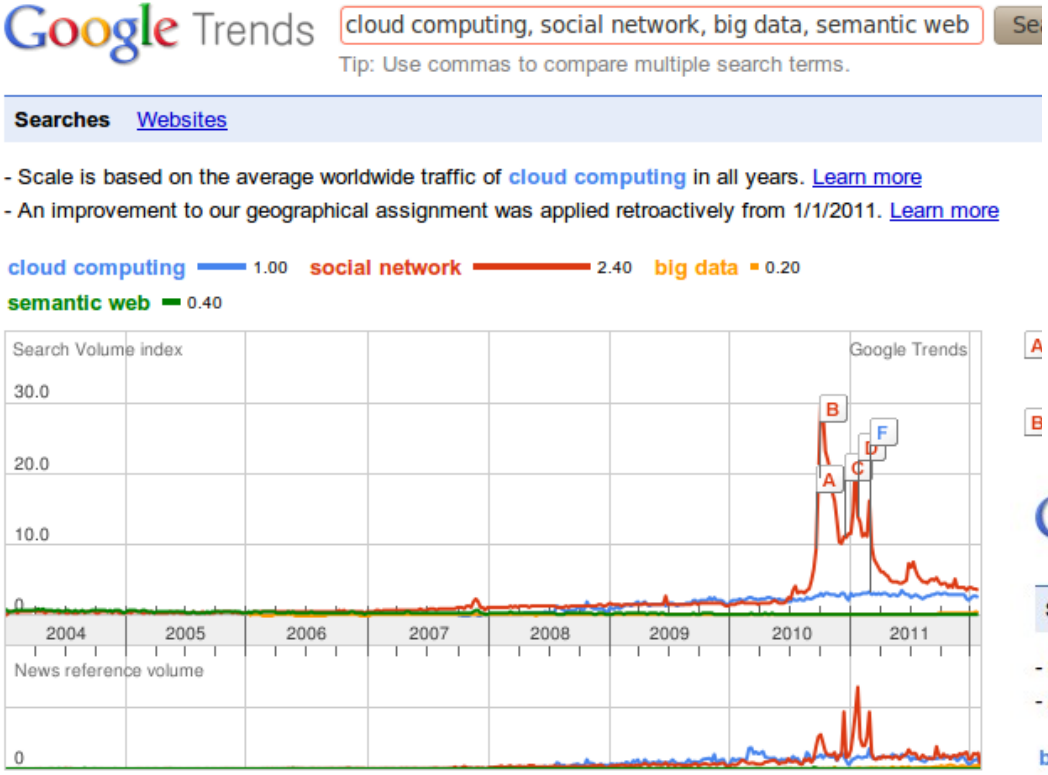

語意網（Semantic Web）從2001年開始制定標準後，逐漸下滑。而同義詞Web 3.0也呈現相似趨勢。巨量資料（Big Data）與其關鍵技術Hadoop，則仍在上揚中。

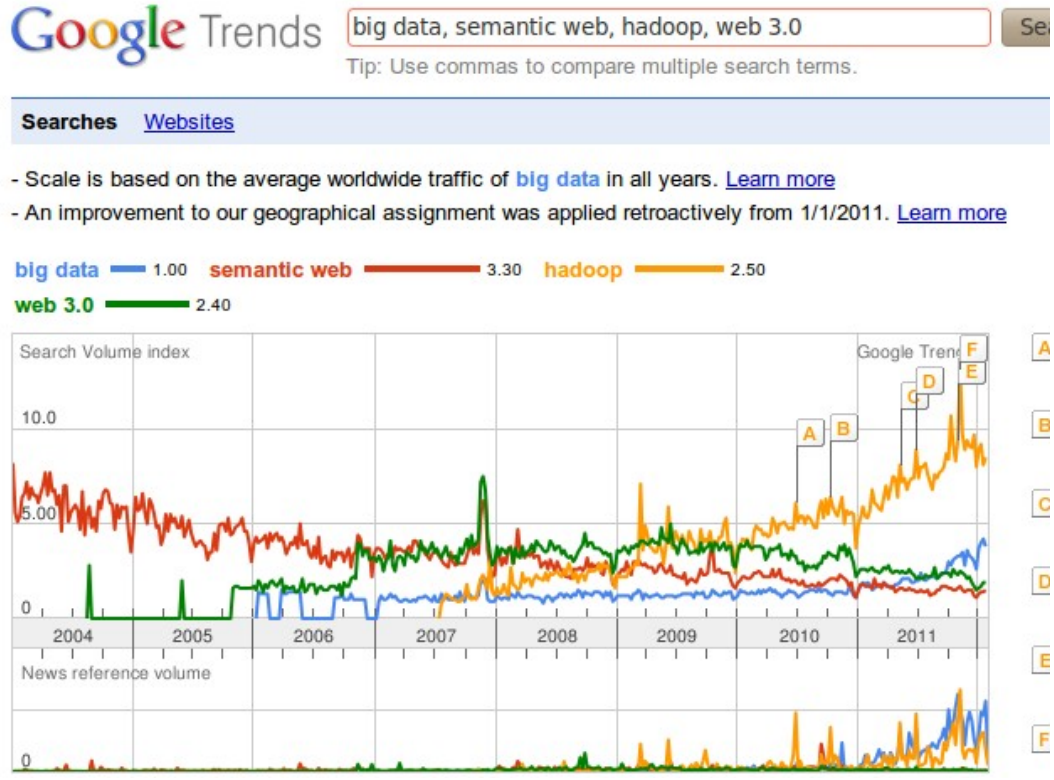

整體而言，雲端運算（Cloud Computing）與社交網路（Social Network）呈現上揚。且社交網路比雲端運算還引人注目。

Trends of Market Needs 市場需求趨勢

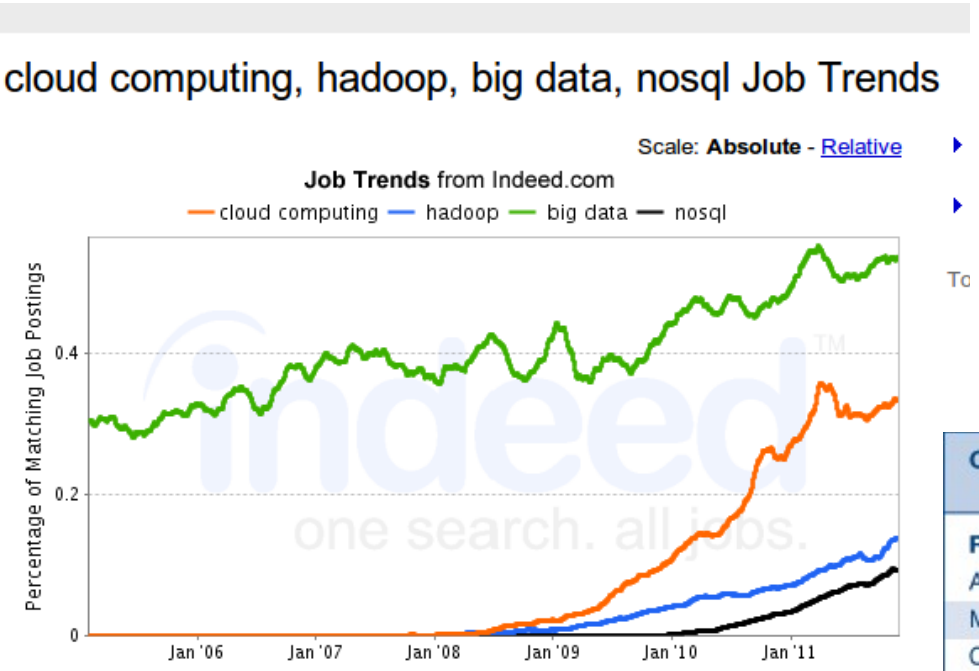

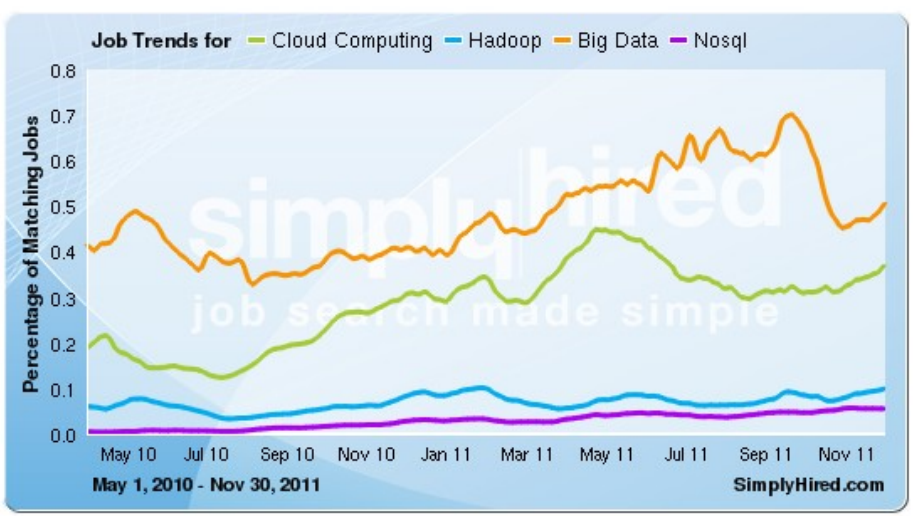

美國軟體就業市場分析，根據 indeed 與 simply hired 兩間公司的趨勢觀察，都得到一樣的結果：

Big Data > Cloud Computing > Hadoop > NoSQL

CIO technologies	Ranking of technologies CIOs selected as one of their top 3 priorities in 2012			
Ranking	***2012***	**2011**	**2010**	**2009**
Analytics and business intelligence	1	5	5	1
Mobile technologies	2	3	6	12
Cloud computing (SaaS, IaaS, PaaS)	3	1	2	16
Collaboration technologies (workflow)	4	8	11	5
Virtualization	5	2	1	3
Legacy modernization	6	7	15	4
IT management	7	4	10	*
Customer relationship management	8	18	*	*
ERP applications	9	13	14	2
Security	10	12	9	8
Social media/Web 2.0	11	10	3	15

Gartner CIO Agenda 2012 前三名：

[1] Business Intelligence (Big Data)

[2] Mobile technology

[3] Cloud Computing

參考來源：http://www.gartner.com/DisplayDocument?id=1524714

How BIG? 讓我們先來認識一下容量單位

Bit (b)	1 or 0
Byte (B)	8 bits
Kilobyte (KB)	1,000 bytes
Megabyte (MB)	1,000 KB
Gigabyte (GB)	1,000 MB
Terabyte (TB)	1,000, GB
Petabyte (PB)	1,000 TB
Exabyte (EB)	1,000 PB
Zettabyte (ZB)	1,000 EB

Data Explosion!! 始於 2007 的「資料大爆炸」時代

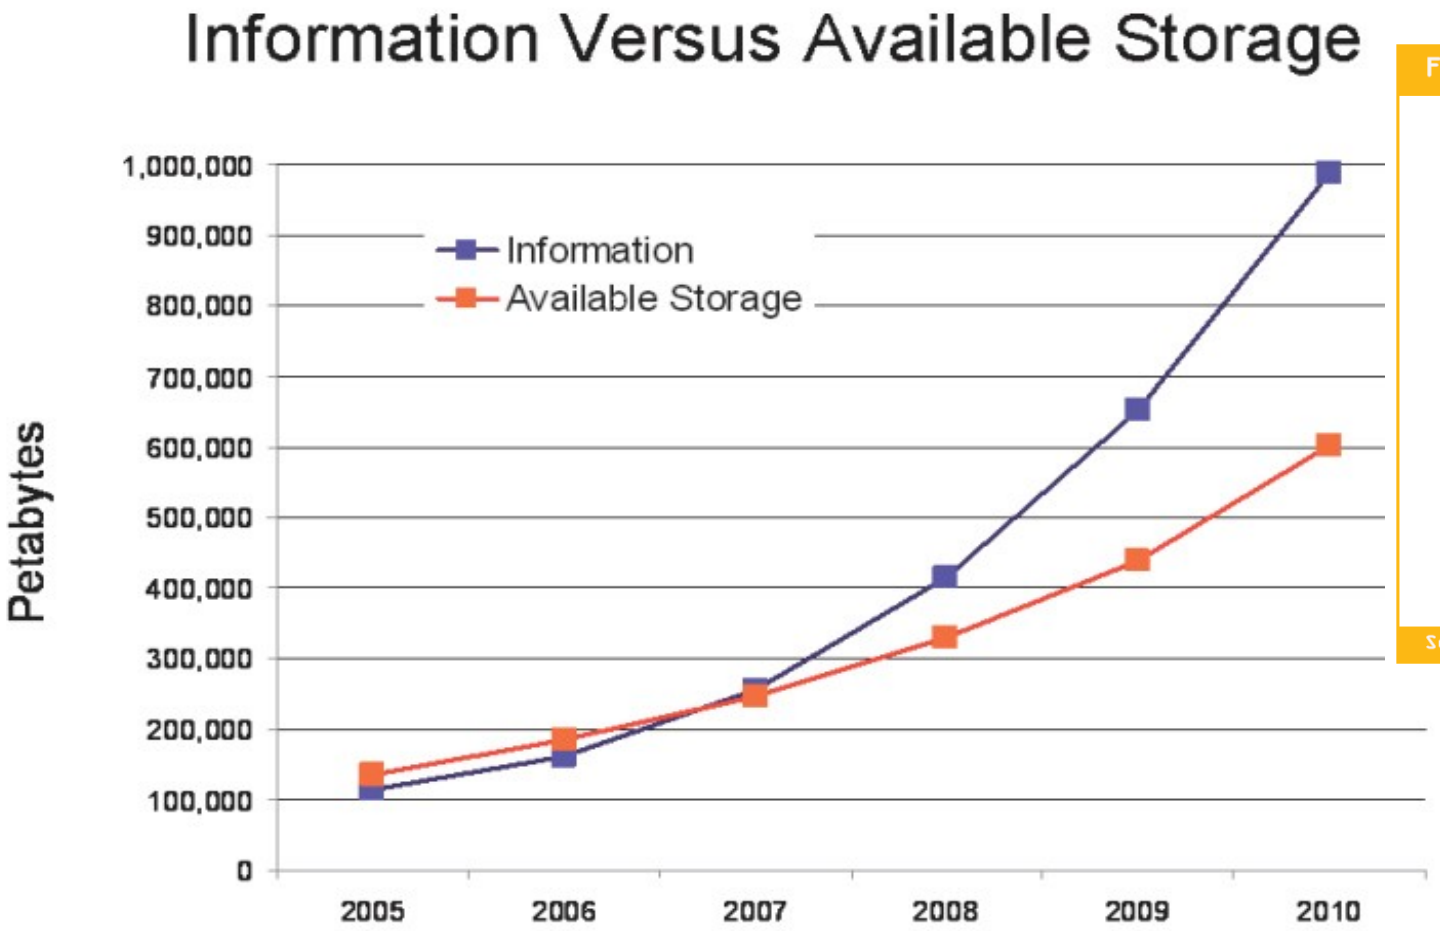

Source: IDC, 2007

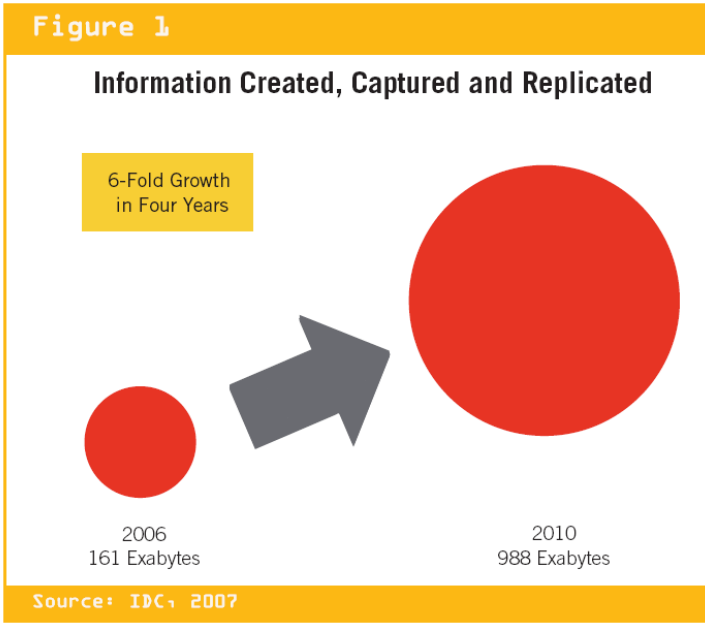

2007 年， IDC 預估
2010 年會成長六倍！
（相較 2006 年）

2006 161 EB
2010 988 EB（預測）

出處：The Expanding Digital Universe,
A Forecast of Worldwide Information Growth Through 2010,
March 2007, An IDC White Paper - sponsored by EMC
http://www.emc.com/collateral/analyst-reports/expanding-digital-idc-white-paper.pdf

Data Explosion!! 始於 2007 的「資料大爆炸」時代

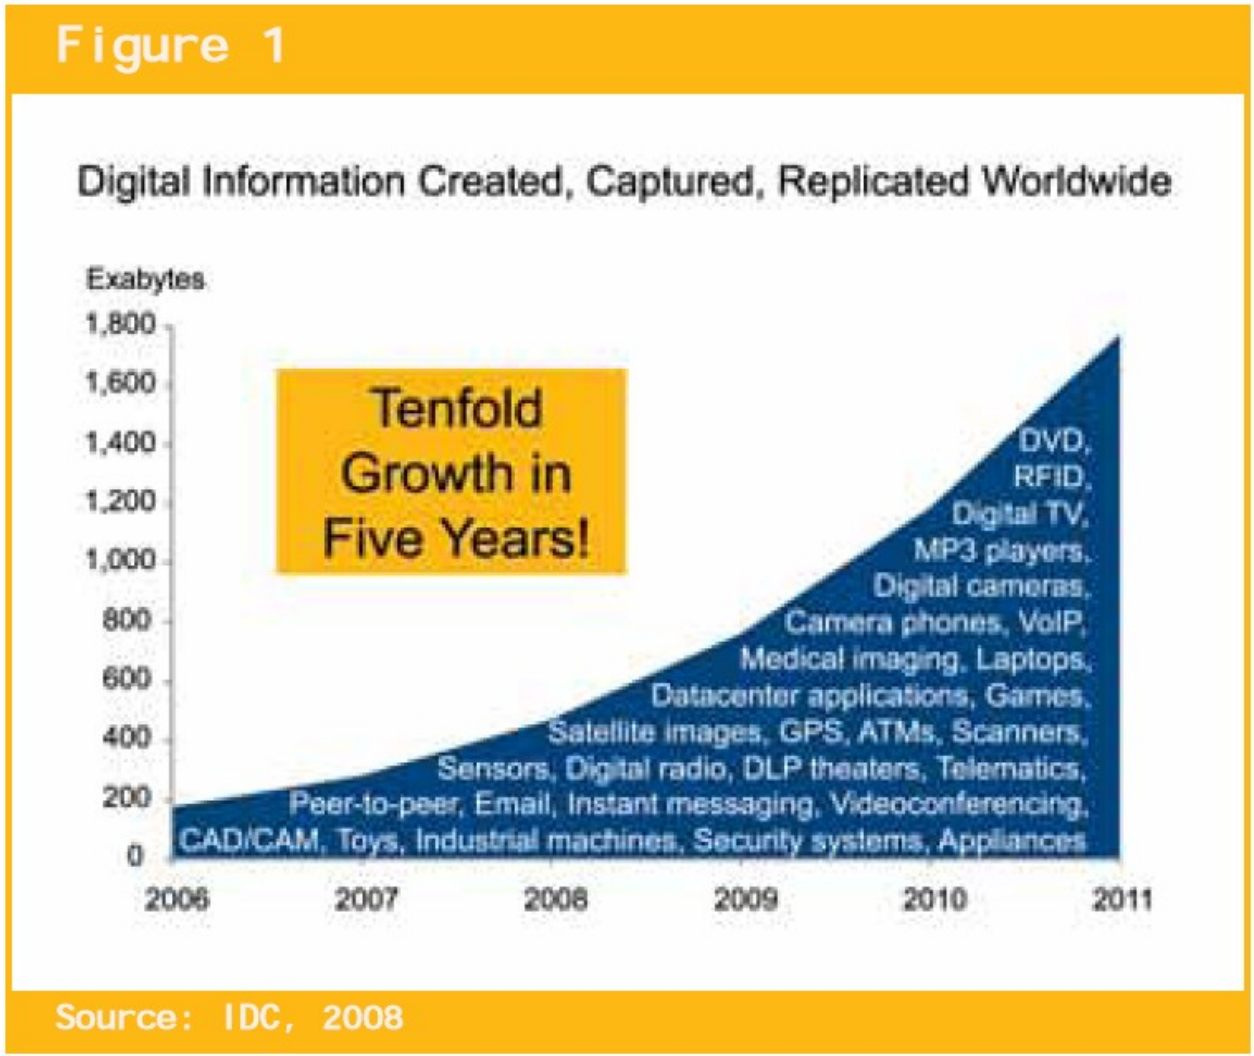

2009 年， IDC 預估
2011 年會成長十倍！
（相較 2006 年）

2006 161 EB
2007 281 EB
2010 988 EB（預測）
2011 1773 EB（預測）

出處：The Diverse and Exploding Digital Universe,
An Updated Forecast of Worldwide Information Growth Through 2011
March 2008, An IDC White Paper - sponsored by EMC
http://www.emc.com/collateral/analyst-reports/diverse-exploding-digital-universe.pdf

Data expanded 2x each year !! 每年約略兩倍

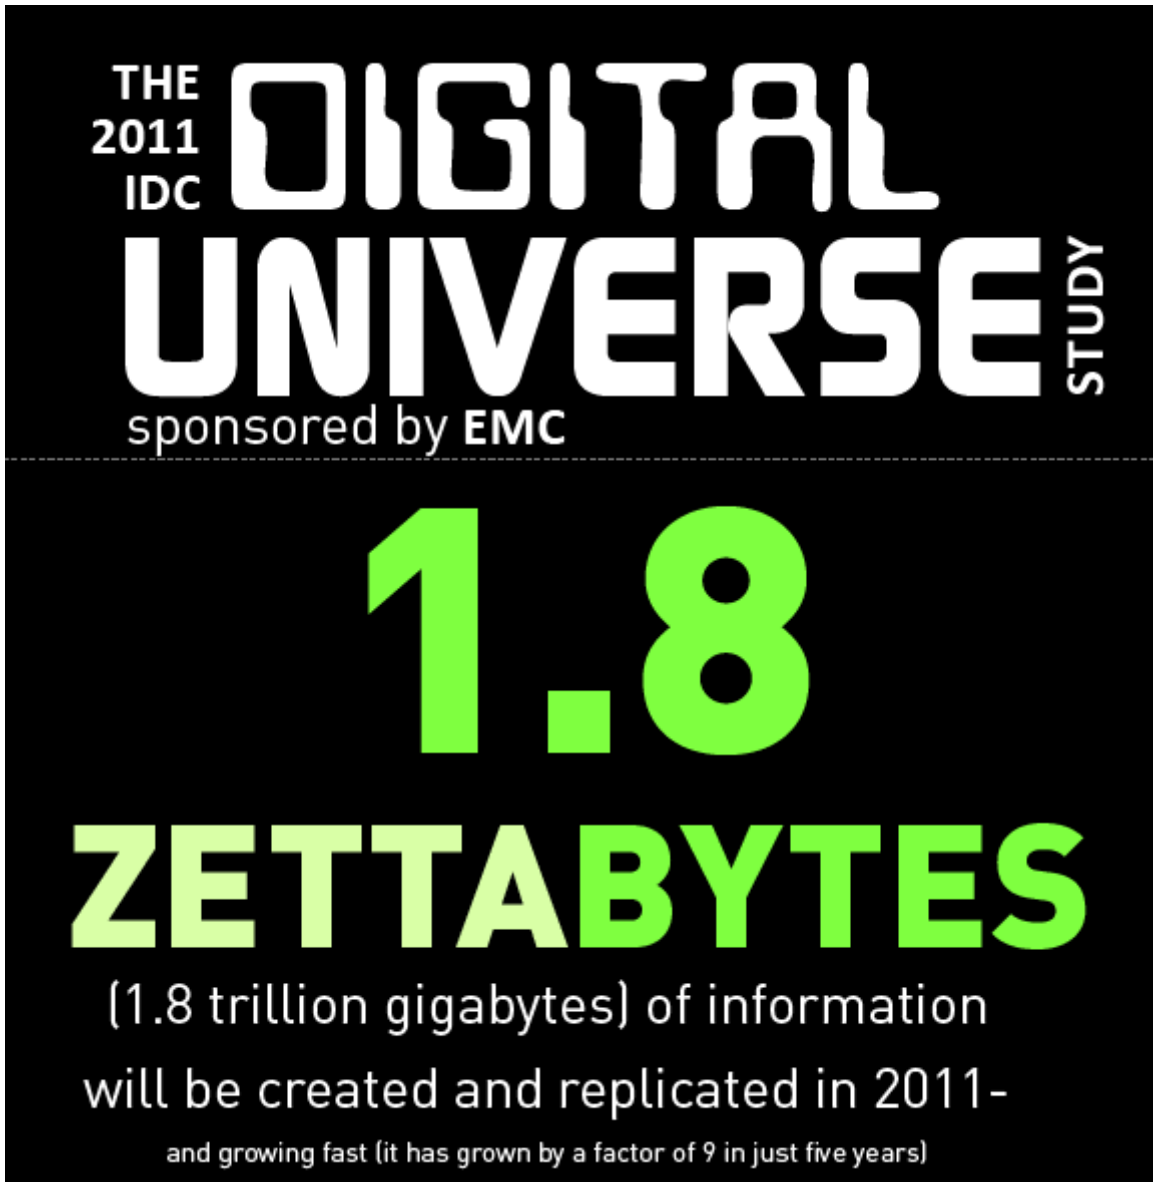

追蹤歷年的 IDC 數據：

2006	161	EB
2007	281	EB
2008	487	EB
2009	800	EB (0.8 ZB)
2010	988	EB (預測)
2010	1200	EB (1.2 ZB)
2011	1773	EB (預測)
2011	1800	EB (1.8 ZB)

景氣差而成長趨緩？
或受新技術抑制？

出處：Extracting Value from Chaos,
June 2011, An IDC White Paper - sponsored by EMC
http://www.emc.com/collateral/about/news/idc-emc-digital-universe-2011-infographic.pdf

What is Big Data?! 何謂『巨量資料』？

巨量資料泛指資料大小已無法用一般軟體擷取、管理與處理；
單一資料集大小介於數十 TB 至數 PB 的資料。

'Big Data' = few dozen TeraBytes to PetaBytes in single data set.

Definition [edit]

Big data is a term applied to data sets whose size is beyond the ability of commonly used software tools to capture, manage, and process the data within a tolerable elapsed time. Big data sizes are a constantly moving target currently ranging from a few dozen terabytes to many petabytes of data in a single data set.

In a 2001 research report[14] and related conference presentations, then META Group (now Gartner) analyst, Doug Laney, defined data growth challenges (and opportunities) as being three-dimensional, i.e. increasing volume (amount of data), velocity (speed of data in/out), and variety (range of data types, sources). Gartner continues to use this model for describing big data.[15]

出處：http://en.wikipedia.org/wiki/Big_data

多個檔案，容量 100TB

一個資料庫，容量 100TB

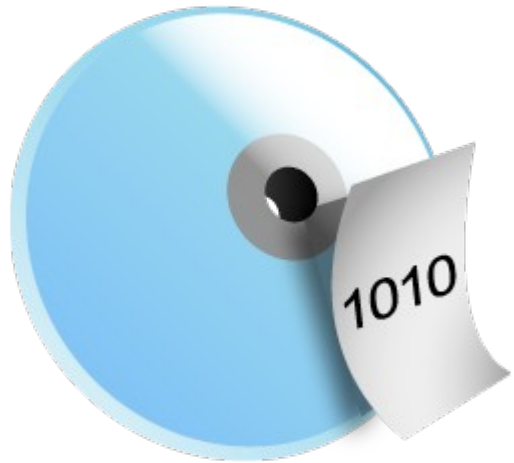

一個檔案，容量 100TB

Gartner Big Data Model？ 巨量資料的模型？

巨量資料的挑戰在於如何管理「數量」、「增加率」與「多樣性」

參考來源：
[1] Laney, Douglas. "3D Data Management: Controlling Data Volume, Velocity and Variety" (6 February 2001)
[2] Gartner Says Solving 'Big Data' Challenge Involves More Than Just Managing Volumes of Data, June 2011

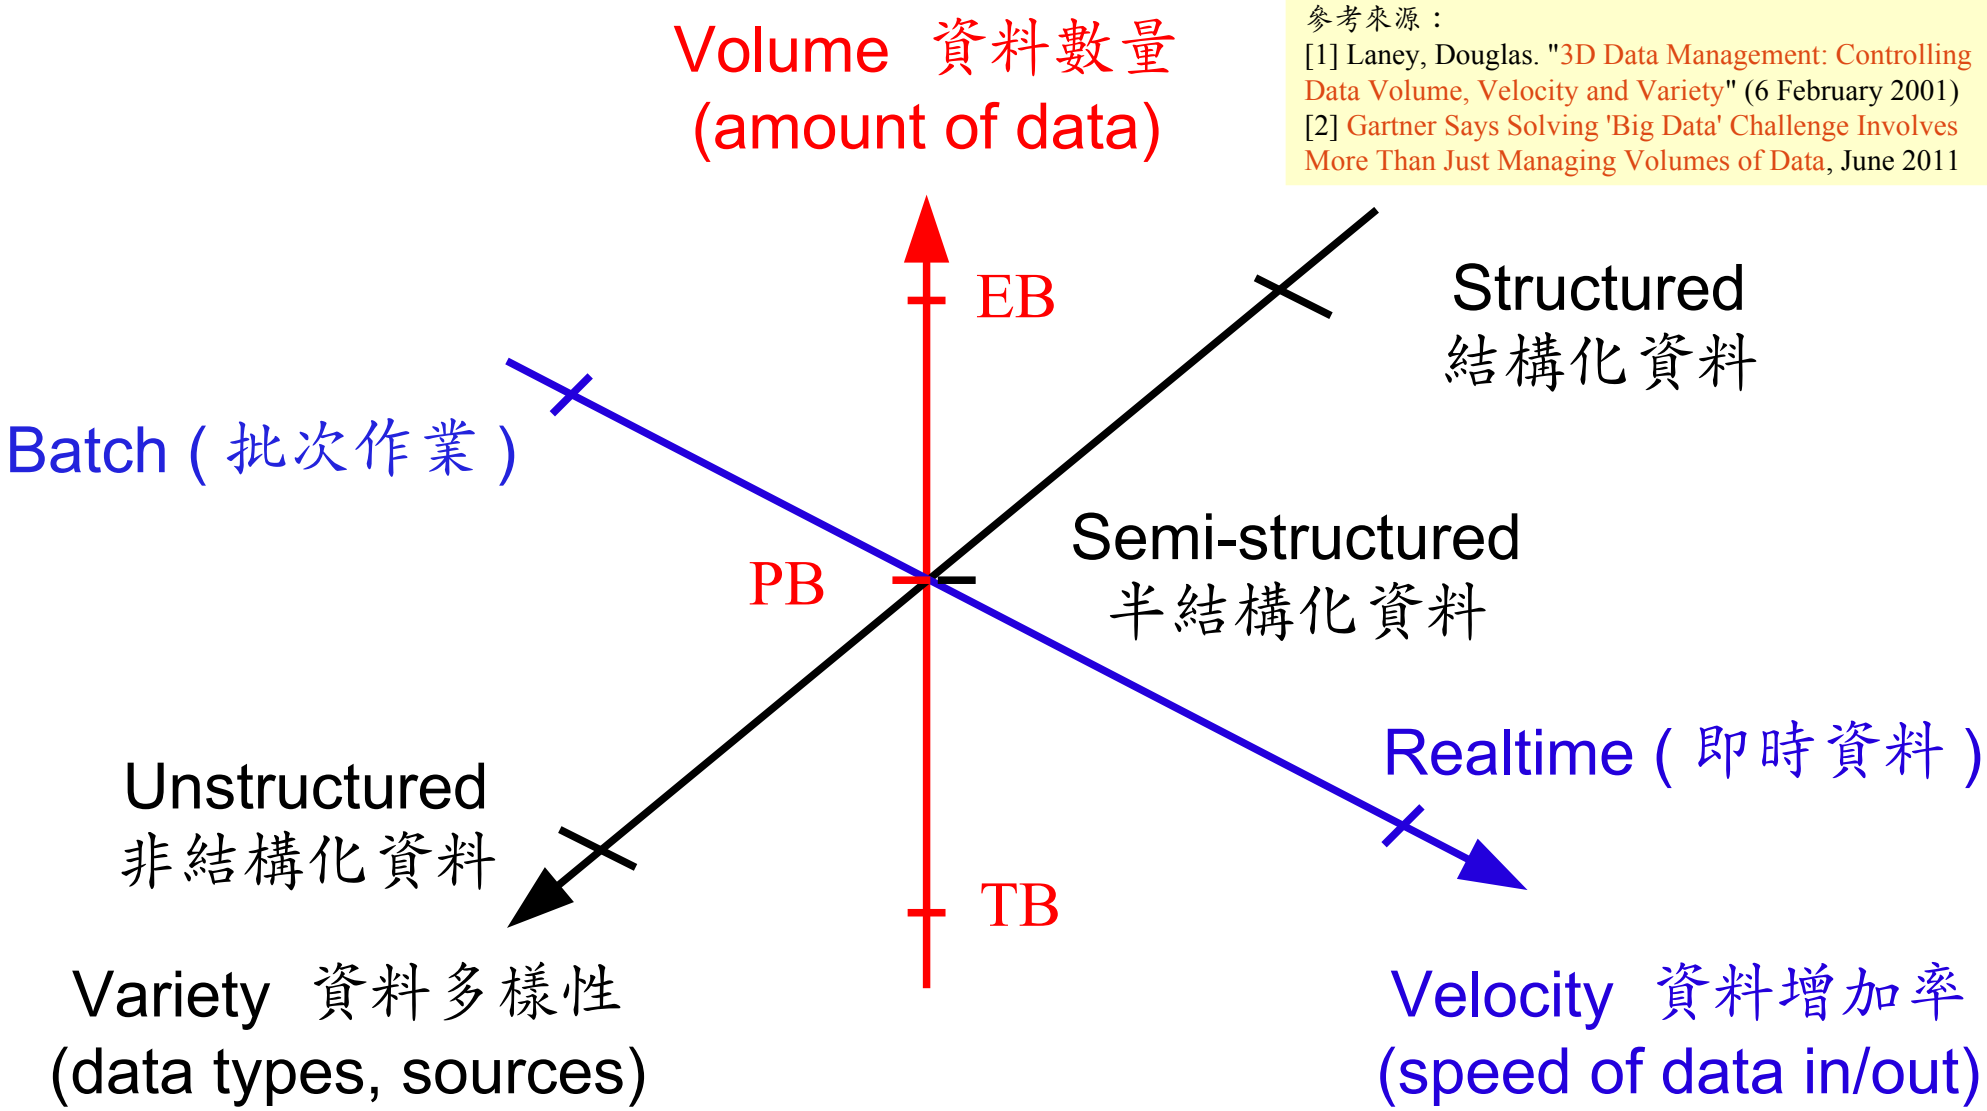

Six Dimensions of Big Data? 六個維度？

Source: Big Data, not Big Problems, http://www.talend.com/products-big-data/

12D of Information Management? 12 個維度？

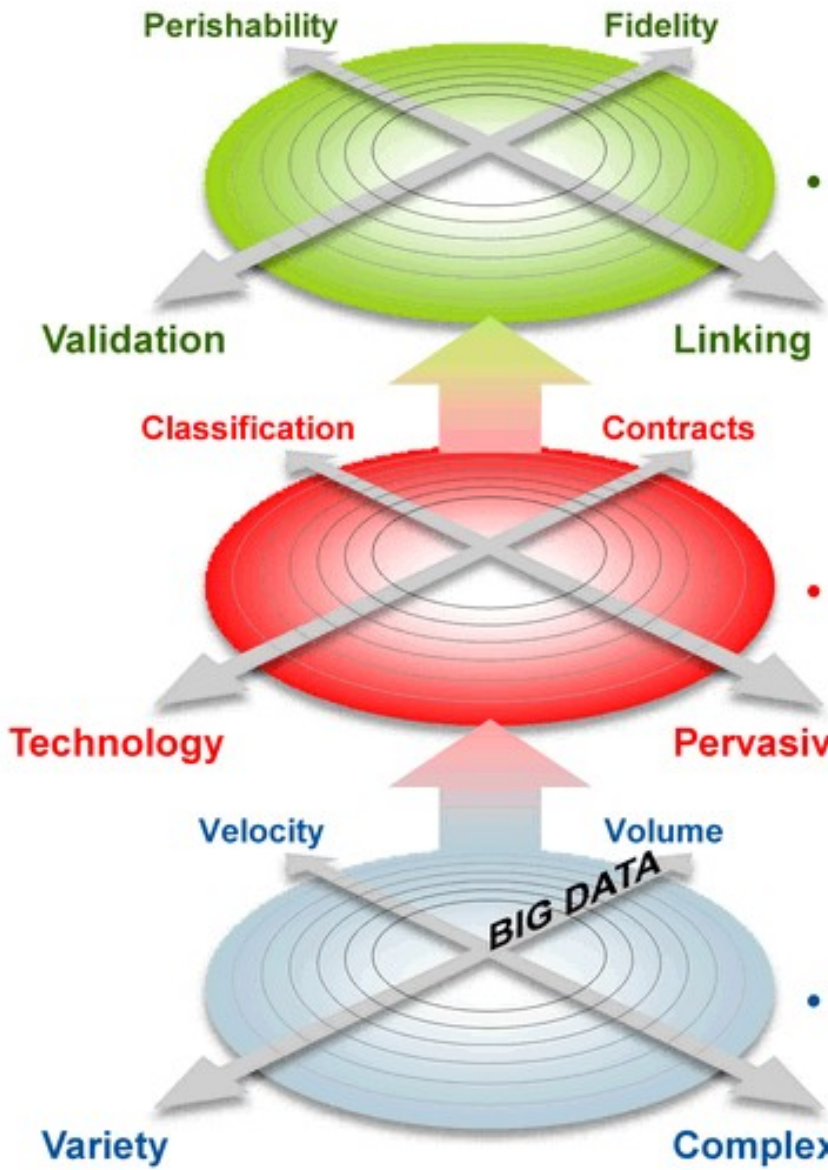

品質管控

- Qualification and Assurance

權限管控

- Access Enablement and Control

數量管控

- Quantification

Big Data 只是終極資訊管理的開端！

Source: Gartner (March 2011), 'Big Data' Is Only the Beginning of Extreme Information Management, 7 April 2011, http://www.gartner.com/id=1622715

Agenda 演講大綱

What is Big Data ? 何謂巨量資料

Why should we care? 爲何需要關切

資料 Data → 知識 Knowledge → 智慧 Wisdom

Why we call it " SMART " !!
智慧打哪兒來？！

Smart Phone
智慧手機

Smart Car
智慧車輛

Smart Grid
智慧電網

SMART
哪裡長
智慧了？

Smart City
智慧城市

Smart Home
智慧家庭

Smart Meter
智慧電錶

資料 Data → 知識 Knowledge → 智慧 Wisdom

Can Machine understand You? 讓機器更懂你？

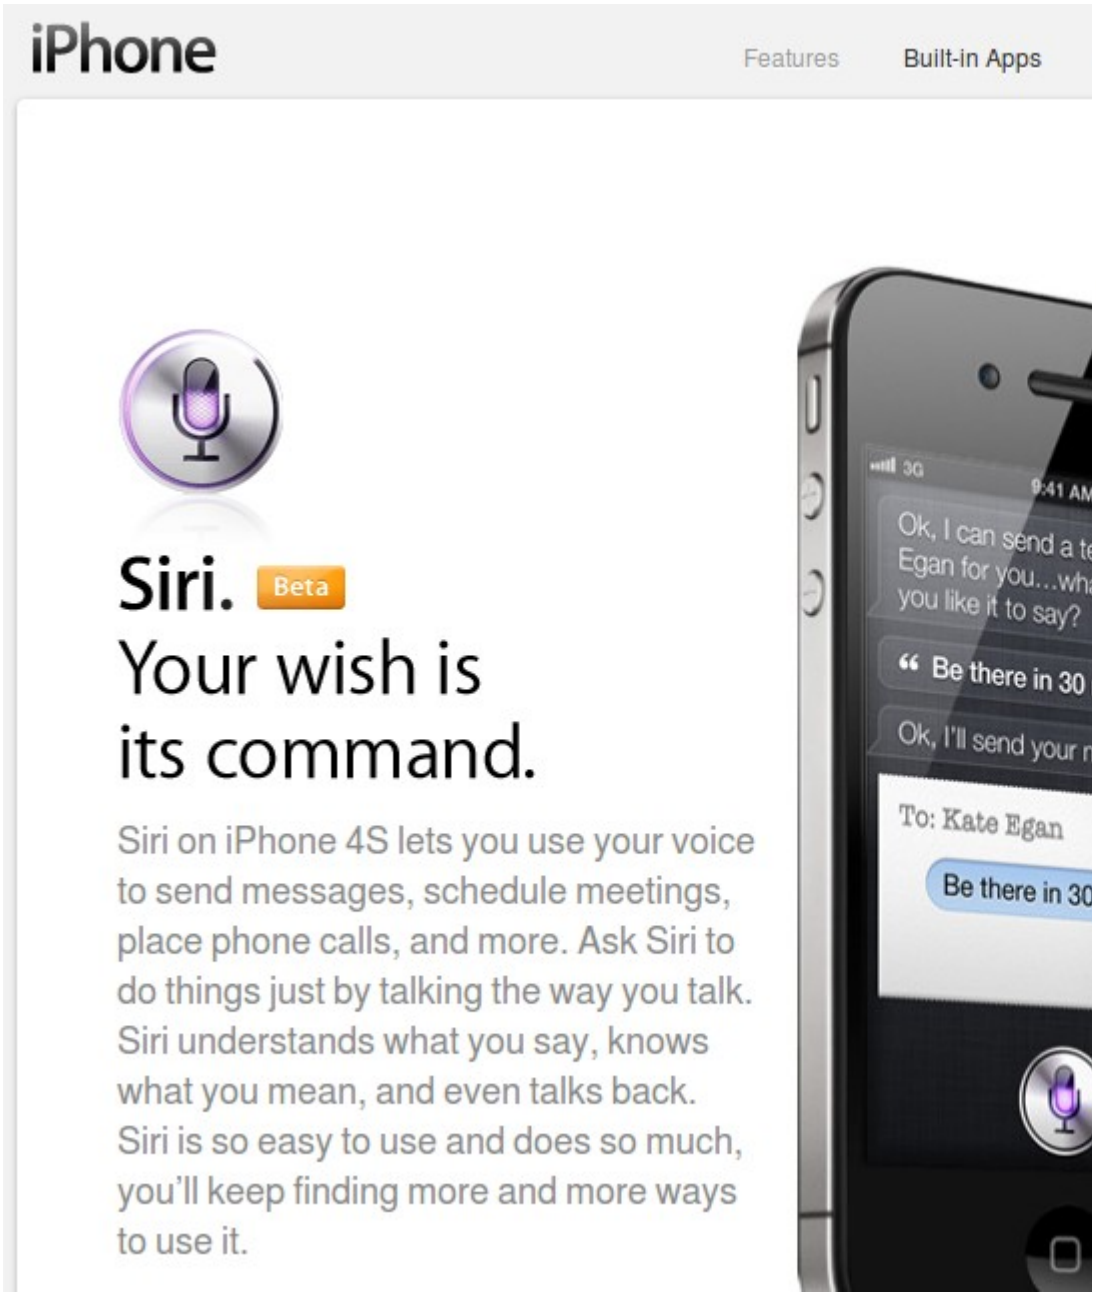

Google將發展「人工智慧」　永久改變搜尋引擎

2012年02月15日 00:11

點評：*超級阿斯拉，衝啊！（阿斯拉：好的，隼人！）*

記者黃郁棋／綜合報導

每個人都在猜，下一波網路革命是什麼？每個人都在猜，未來的世界會如何運作？Google的資深副總Amit Singhai透露了一點訊息。「Google正努力從『單字』層面進展到『意義』層面，未來搜尋引擎提供的不只是關鍵字搜尋，搜尋引擎甚至會『明白』你到底要什麼。」

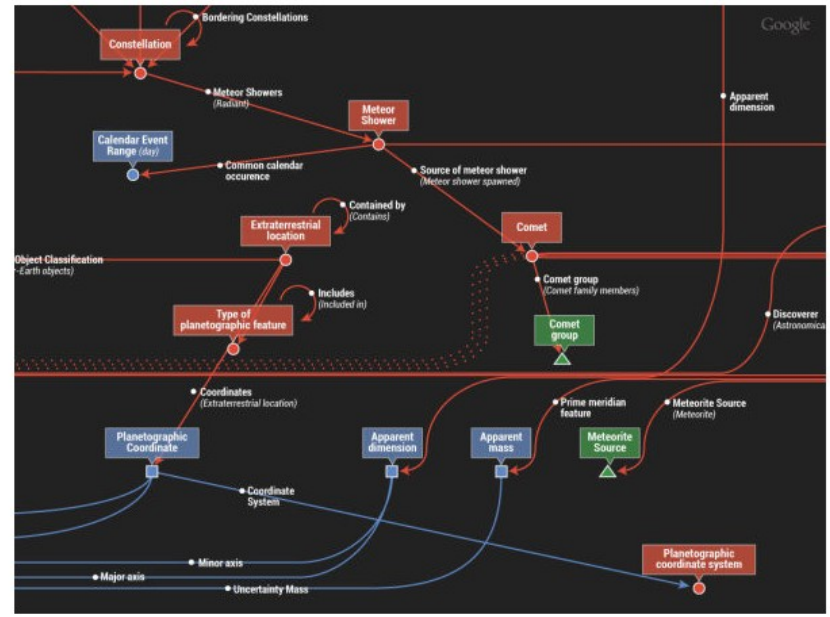

▲Google未來將會朝「人工智慧」前進。(圖／取自mashable.com)

http://www.ettoday.net/news/20120215/25085.htm

Evolution of Software / Service
軟體演化勢必走向『智能化』

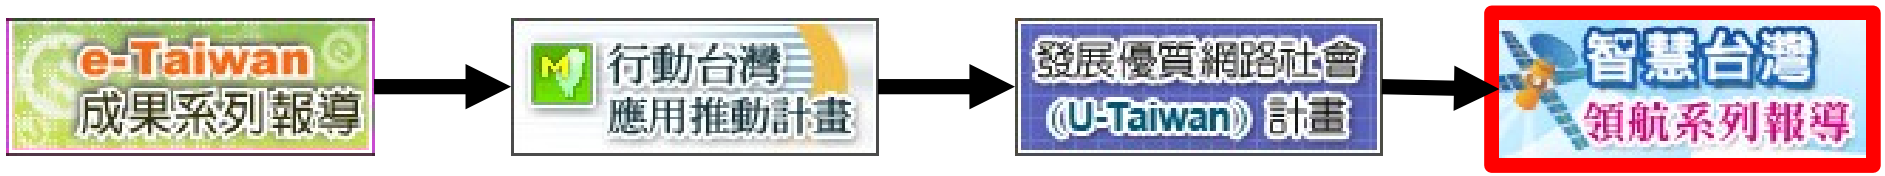

實體 Physical	單機版 個人使用 Personal Software	網路版 多人共享 Share Service Software	行動版 非同步存取 Mobile Cloud Service
信箱 Mailbox	E-Mail	Web Mail	Mobile Mail
電視 TV	電視盒 Setop Box	Web TV Ex. Youtube	Mobile TV
打字機 Typer Writer	Office	Google Docs	M-Office
電話 Telephone	數位電話 PBX	Skype	Flash Wengo
佈告欄 Bullet Borad	電子佈告欄 BBS	部落格 Blog	微網誌 Twitter

The wisdom of Clouds (Crowds)
雲端序曲：雲端的智慧始終來自於群眾的智慧

2006 年 8 月 9 日

Google 執行長施密特（Eric Schmidt）於SES '06會議中首次使用「雲端運算（Cloud Computing）」來形容無所不在的網路服務

2006 年 8 月 24 日

Amazon 以 Elastic Compute Cloud 命名其虛擬運算資源服務

Source: http://www.cnet.co.uk/i/c/blg/cat/software/cloudcomputing/clouds1.jpg

Data is the source of Wisdom !!
用雲掌握資料，加以分析，形成智能給端用

雲

資料中心
提供服務

雲端設計新思維：端的智能來自於雲的服務

Devices share the wisdom of Cloud

端

各類裝置
存取服務

Agenda 演講大綱

What is Big Data ? 何謂巨量資料

Why should we care? 為何需要關切

When to deploy it ? 何時導入技術

基礎建設 IaaS → 分析平台 PaaS → 智慧服務 SaaS

National Definition of Cloud Computing
美國國家標準局 NIST 給雲端運算所下的定義

5 Characteristics 五大基礎特徵

4 Deployment Models 四個佈署模型

3 Service Models 三個服務模式

1. On-demand self-service.
隨需自助服務

2. Broad network access
隨時隨地用任何網路裝置存取

3. Resource pooling
多人共享資源池

4. Rapid elasticity
快速重新佈署靈活度

5. Measured Service
可被監控與量測的服務

4 Deployment Models of Cloud Computing
雲端運算的四種佈署模型

Public Cloud
公用雲端

Target Market is S.M.B.
主要客户爲中小企業

Dynamic Resource Provisioning between public and private cloud
私有雲端動態根據計算需求調用公用雲端的資源

Hybrid Cloud

以大型企業爲主要客户
Enterprise is key market

私有雲端
Private Cloud

Community Cloud
社群雲端

Academia 學術爲主

3 Service Models of Cloud Computing
雲端運算的三種服務模式（市場區隔）

IaaS
Infrastructure as a Service
架構即服務

PaaS
Platform as a Service
平台即服務

SaaS
Software as a Service
軟體即服務

Roadmap to build Your Enterprise Cloud !!

佈建企業雲端的時程規劃

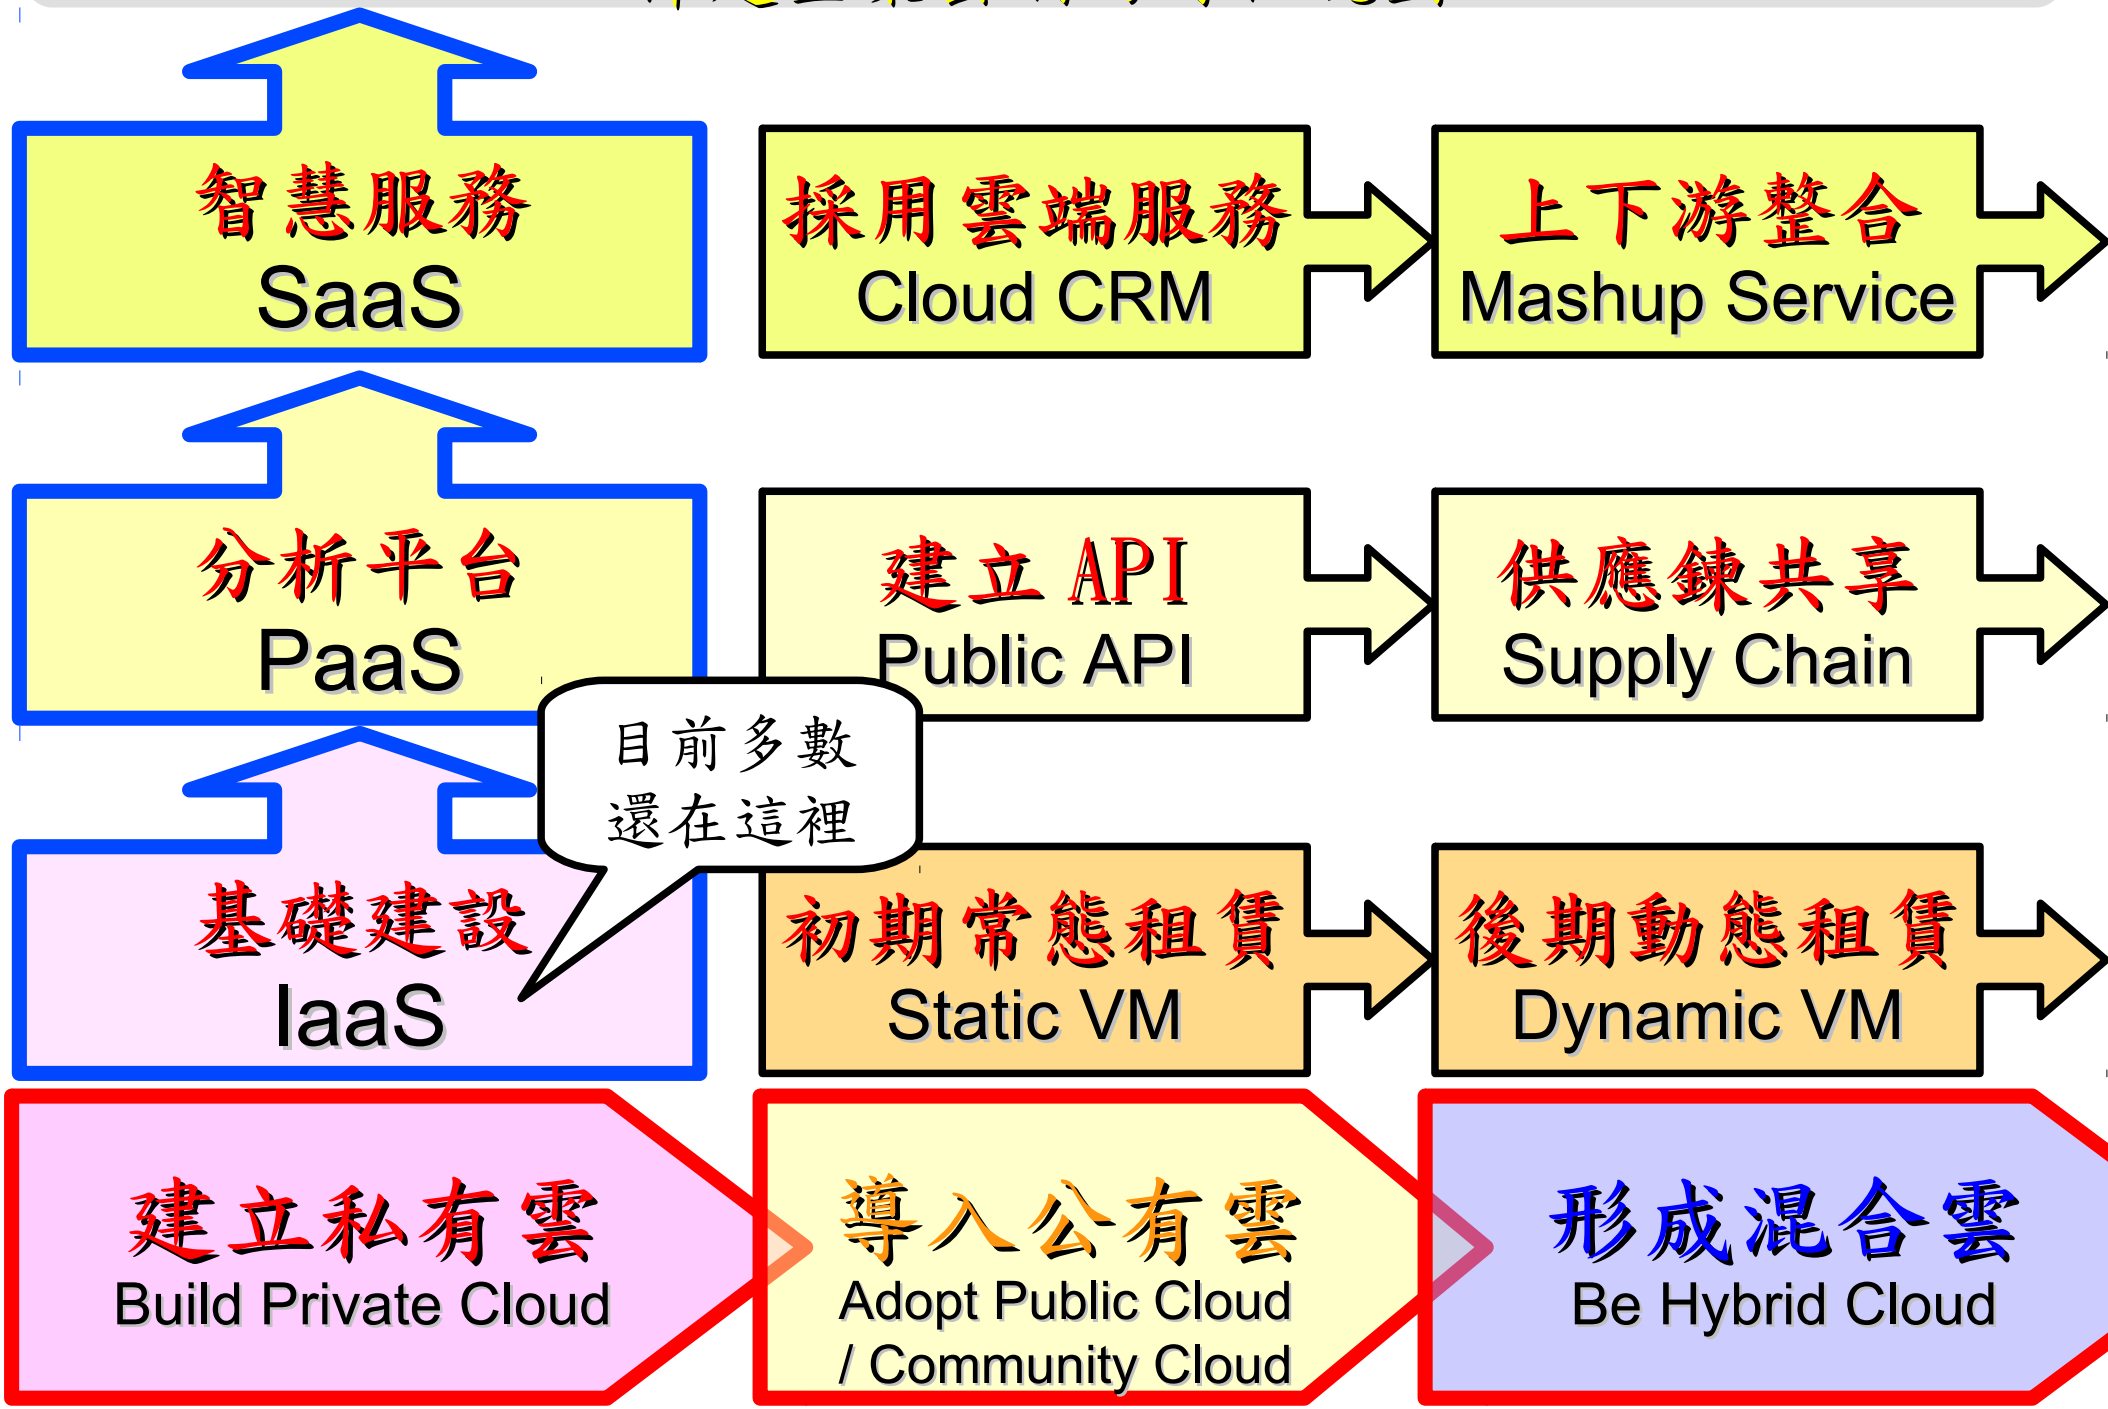

Agenda 演講大綱

- What is Big Data ? 何謂巨量資料
- Why should we care? 爲何需要關切
- When to deploy it ? 何時導入技術
- **How** to handle it ? 三大因應策略

儲存虛擬化 Dedup. → 資料安全 Security → 智慧服務 SaaS

Three Solutions !! 三種服務模式 vs. 三類因應對策

SaaS Software as a Service 軟體即服務	**Web 2.0** 網頁服務	(A) 提供 API 介面 (B) 分散式資料庫
PaaS Platform as a Service 平台即服務	**Data Analysis** 資料分析	(A) 資料整合 (B) 資料探勘
IaaS Infrastructure as a Service 架構即服務	**Virtualization** 虛擬化技術	(A) 儲存虛擬化 (B) 備援與加密

What is Virtualization ??
虛擬化技術有哪些呢 ??

- Application Virtualization 應用程式虛擬化
- Desktop Virtualization / Client Virtualization 桌面虛擬化
- Presentation Virtualization 顯示虛擬化
- OS-level Virtualization 作業系統虛擬化
- Network Virtualization 網路虛擬化
- Storage Virtualization 儲存虛擬化

Database Virtualization 資料庫虛擬化

Data Virtualization 資料虛擬化

Source: http://en.wikipedia.org/wiki/Virtualization

Deduplication? 去除重複儲存的資料？

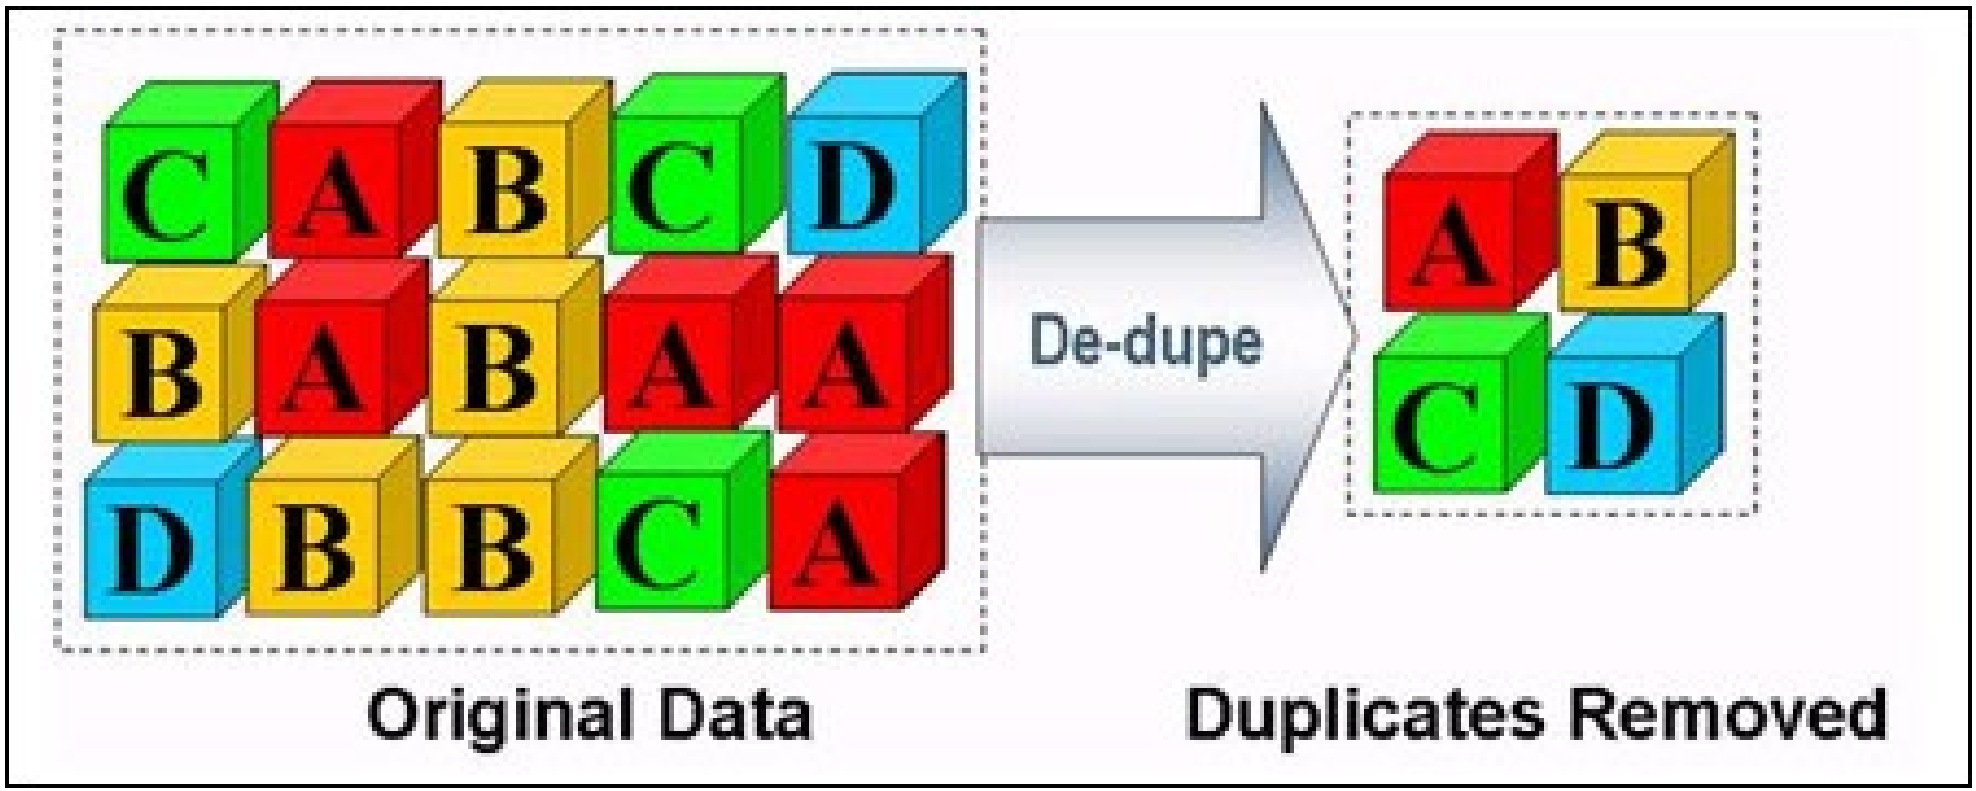

- 資料整合為跨單位整合的第一步 !!
- 商業硬體方案： EMC、 NetApp
- 自由軟體方案：
  - ZFS、 Lessfs、 SDFS...

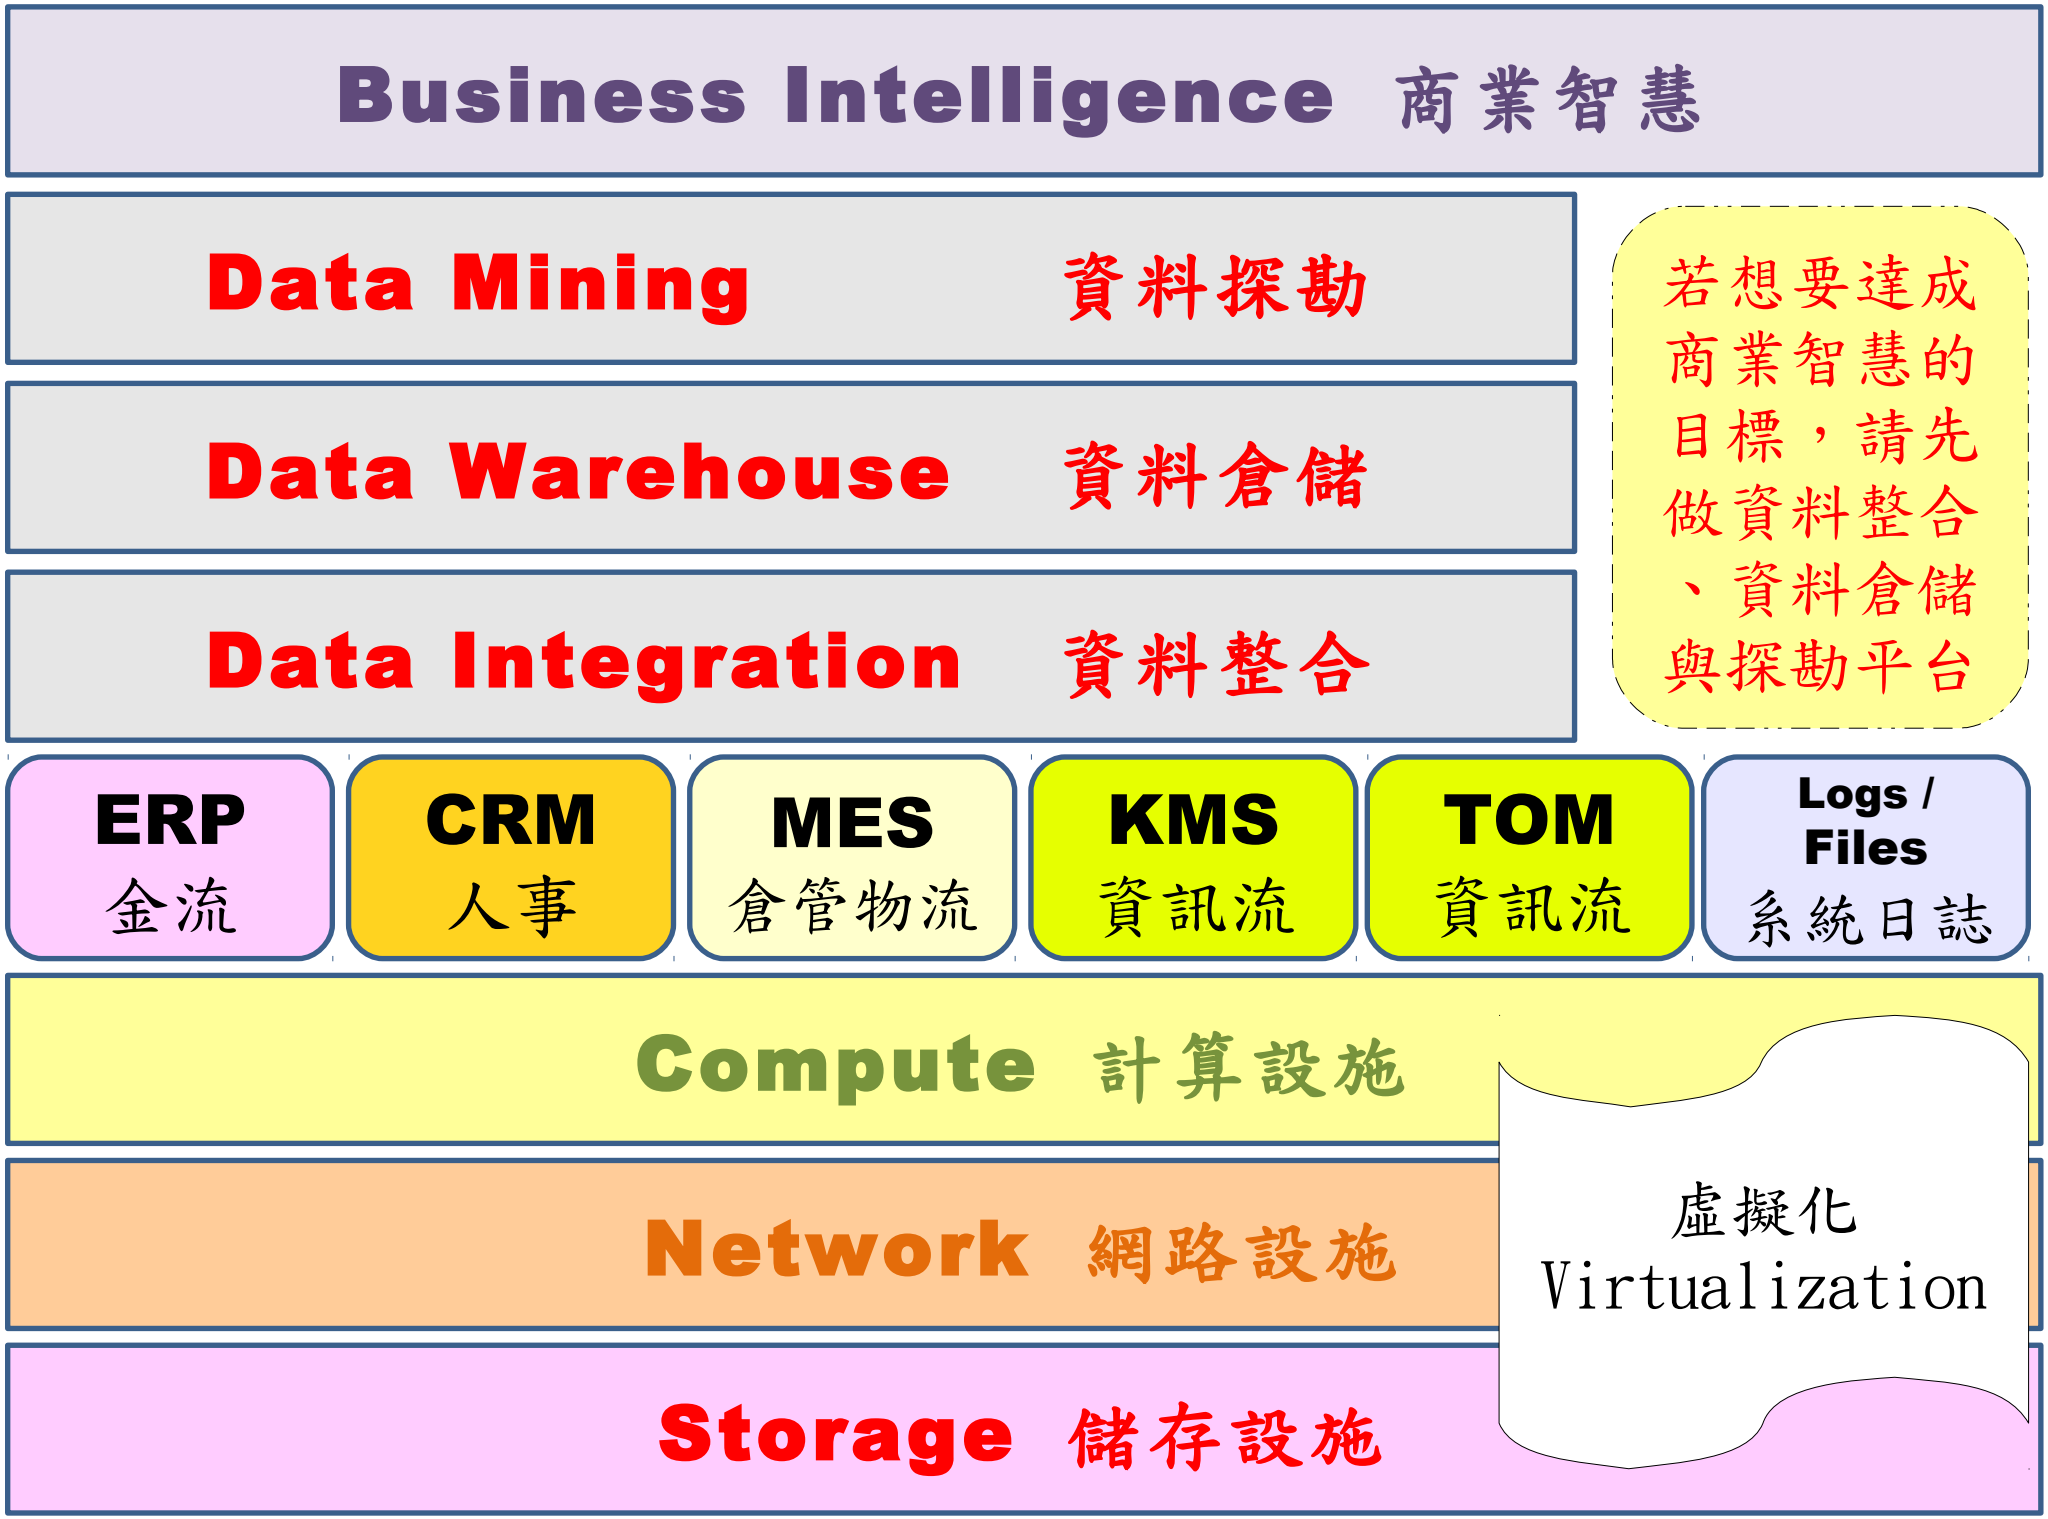
Business Intelligence 商業智慧
Data Mining 資料探勘
Data Warehouse 資料倉儲
Data Integration 資料整合
若想要達成商業智慧的目標，請先做資料整合、資料倉儲與探勘平台
ERP 金流
CRM 人事
MES 倉管物流
KMS 資訊流
TOM 資訊流
Logs / Files 系統日誌
Compute 計算設施
Network 網路設施
Storage 儲存設施
虛擬化 Virtualization

Data Integration ? 怎麼做資料整合？

Source : http://en.wikipedia.org/wiki/Data_integration

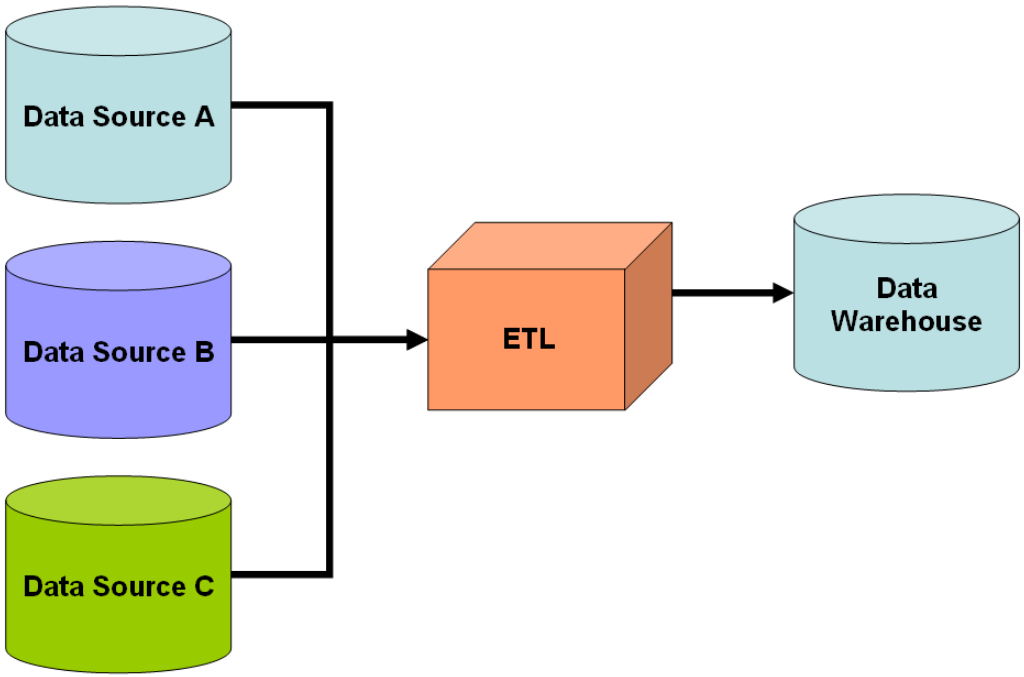

Figure 1: Simple schematic for a data warehouse. The ETL process extracts information from the source databases, transforms it and then loads it into the data warehouse.

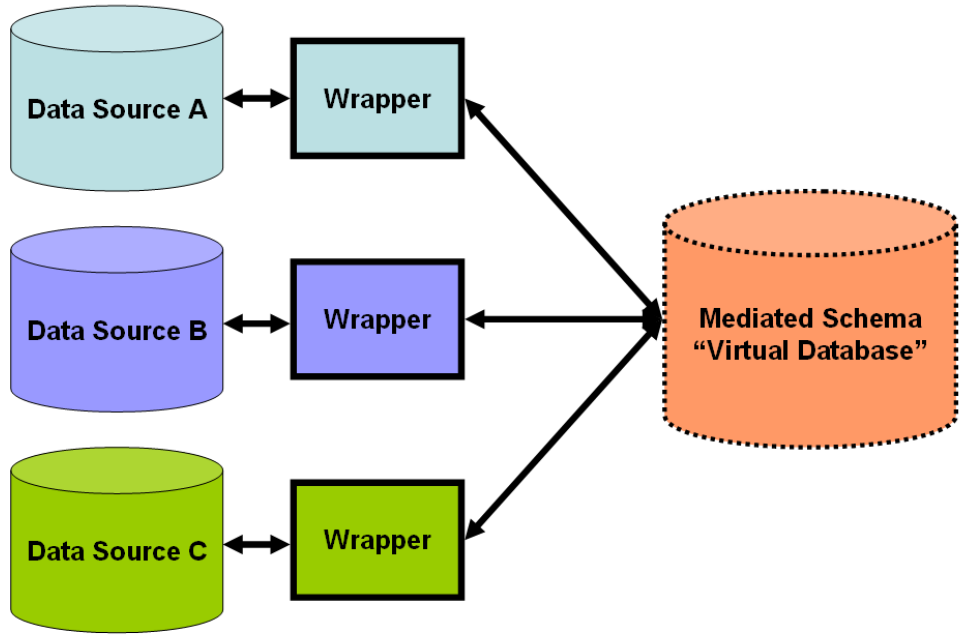

Figure 2: Simple schematic for a data-integration solution. A system designer constructs a mediated schema against which users can run queries. The virtual database interfaces with the source databases via wrapper code if required.

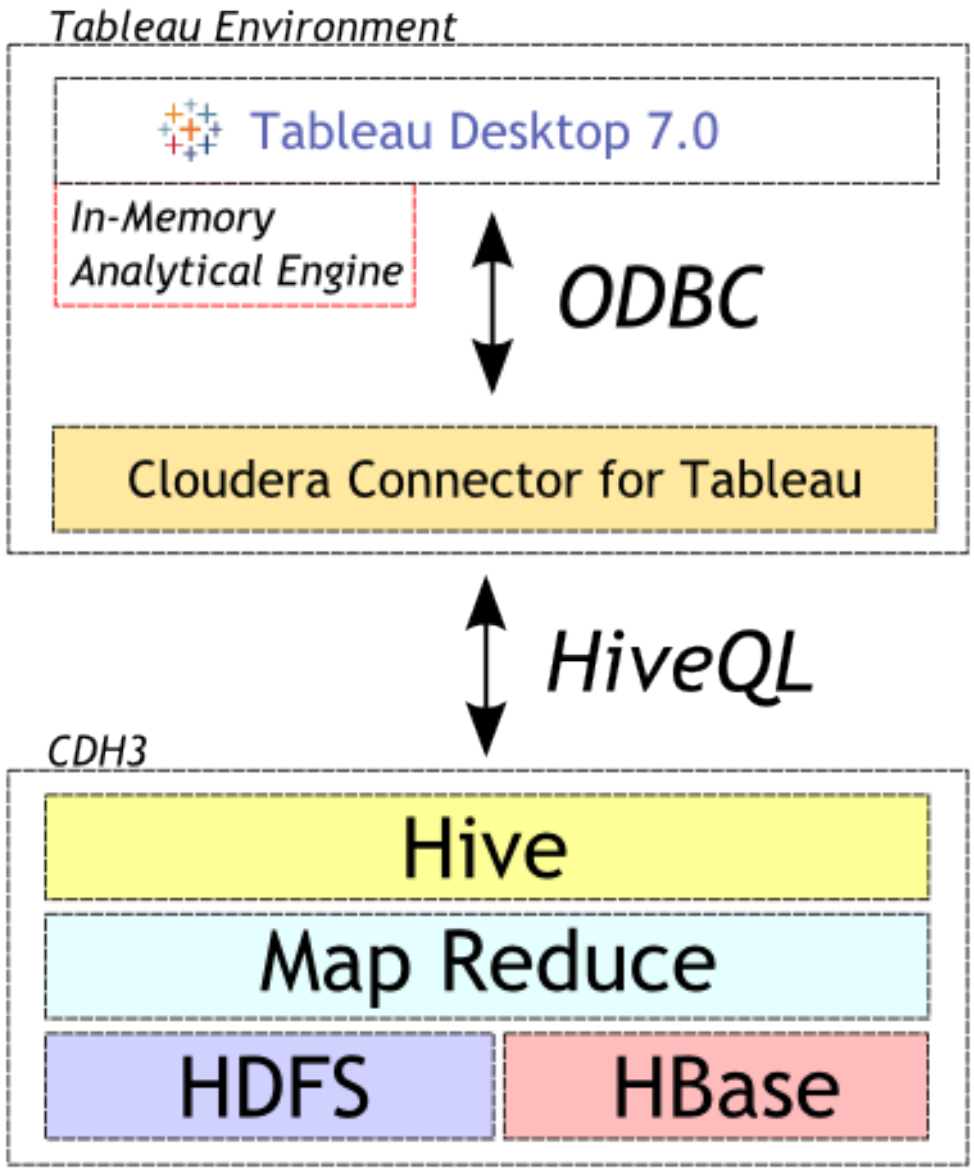
Tableau Environment
Tableau Desktop 7.0
In-Memory Analytical Engine
ODBC
Cloudera Connector for Tableau
HiveQL
CDH3
Hive
Map Reduce
HDFS
HBase

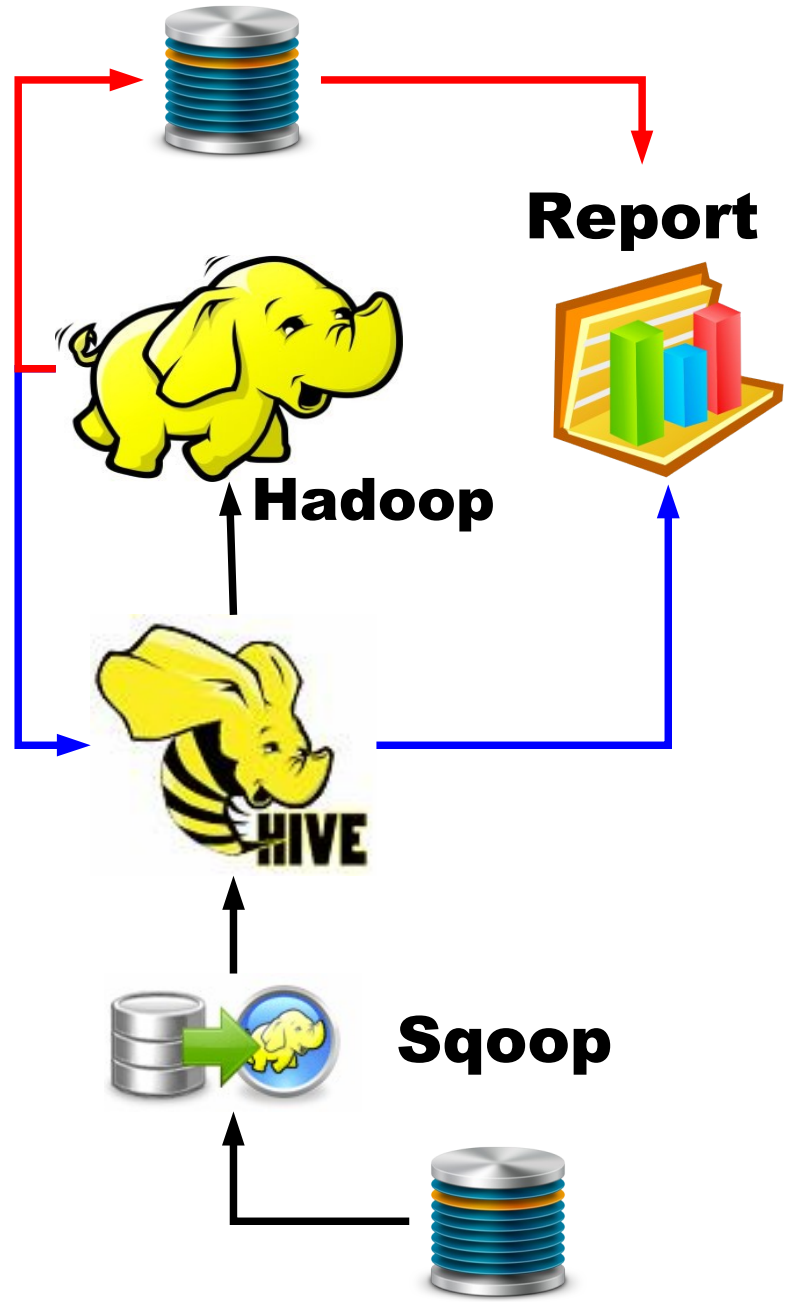
Report
Hadoop
HIVE
Sqoop

Agenda 演講大綱

- What is Big Data ? 何謂巨量資料
- Why should we care? 爲何需要關切
- When to deploy it ? 何時導入技術
- How to handle it ? 三大因應策略
- **Who** is key player ? 誰是成功關鍵

Data Scientist !! 資料科學家！！

Data scientist: The hot new gig in tech

By Michal Lev-Ram, writer September 6, 2011: 5:00 AM ET

Companies that want to make sense of all their bits and bytes are hiring so-called data scientists - if they can find any.

ILLUSTRATION: GAVIN POTENZA

FORTUNE -- The unemployment rate in the U.S. continues to be abysmal (9.1% in July), but the tech world has spawned a new kind of highly skilled, nerdy-cool job that companies are scrambling to fill: data scientist.

會「統計」的人照過來！

財星雜誌(FORTUNE)等均報導今年最熱門的職缺是「資料科學家」！

Source : http://tech.fortune.cnn.com/2011/09/06/data-scientist-the-hot-new-gig-in-tech/
http://visualoop.tumblr.com/post/4052912103/the-role-of-the-data-scientist

The way toward Business Inteligence
通往商業智慧的漫長道路

Business Inteligence	商業智慧
Data Mining	資料探勘
Data Warehouse	資料倉儲
Data Integration	資料整合
OS-level Virtualization	作業系統虛擬化
Network Virtualization	網路虛擬化
Storage Virtualization	儲存虛擬化

pentaho
POWERFUL ANALYTICS MADE EASY™

cloudera

HITACHI
Inspire the Next

talend*
*open integration solutions

vmware®

CISCO

EMC²

NetApp

What we learn today ?

WHAT	海量資料泛指介於TB到PB之間的資料集!! few dozen TeraBytes to PetaBytes in single data set !!
WHY	透過統計分析人類的資料，讓機器更有智慧~ Make Machine Smart !
WHEN	先建私有雲的虛擬化架構，然後才建分析平台 Build Private IaaS first, then PaaS !!
HOW	儲存虛擬化、資料備援與加密、分析平台 Deduplication , Data Recovery / Encryption, Data Analysis
WHO	資料科學家！接下來的講者都是佼佼者！ Data Scientist ! Next Speaker are all Key Players ....

處理巨量資料的資訊架構與關鍵技術

Technologies to build IT Stack for Big Data

Jazz Wang

Yao-Tsung Wang

jazz@nchc.org.tw

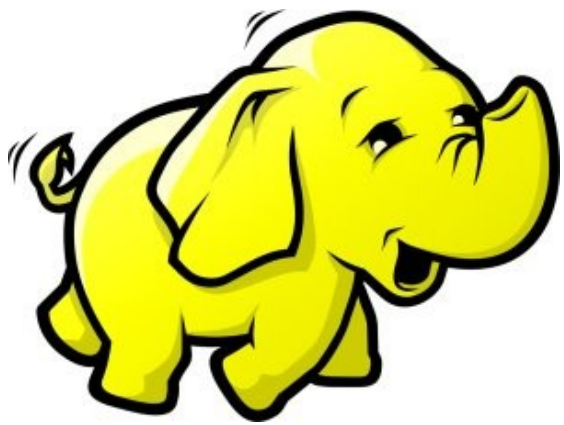

Hot Jobs in Big Data
從巨量資料的熱門工作談起

Data Mining	資料探勘
Data Visualization	資料視覺化
Data Analysis	資料分析
Data Manipulation	資料操控
Data Discovery	資料鑑識

How to Get a Hot Job in Big Data, Dan Tynan, InfoWorld, March 19, 2012
出處：http://www.cio.com/article/print/702388

Applications of Data Mining
資料探勘的應用 - 搜尋引擎

檔案搜尋

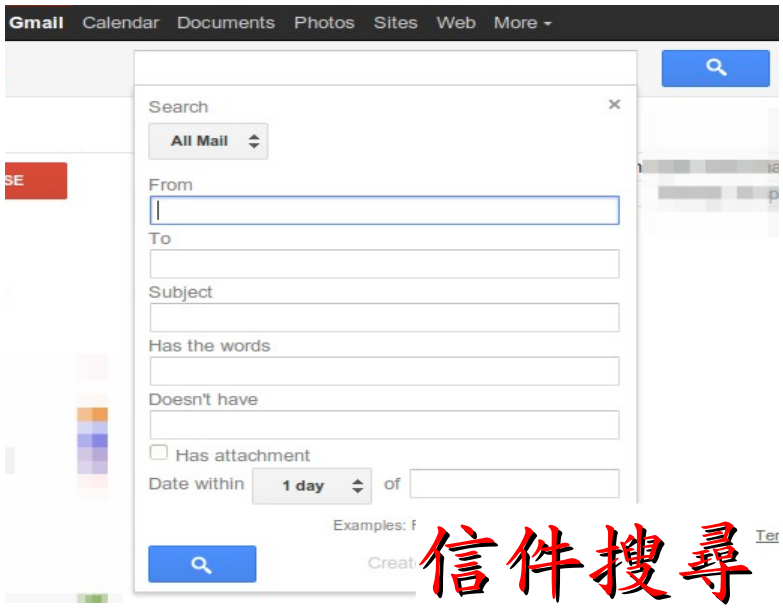

信件搜尋

即時通訊搜尋

資料庫搜尋

「網頁搜尋」

Applications of Data Visualization
資料視覺化的應用 -Infographics

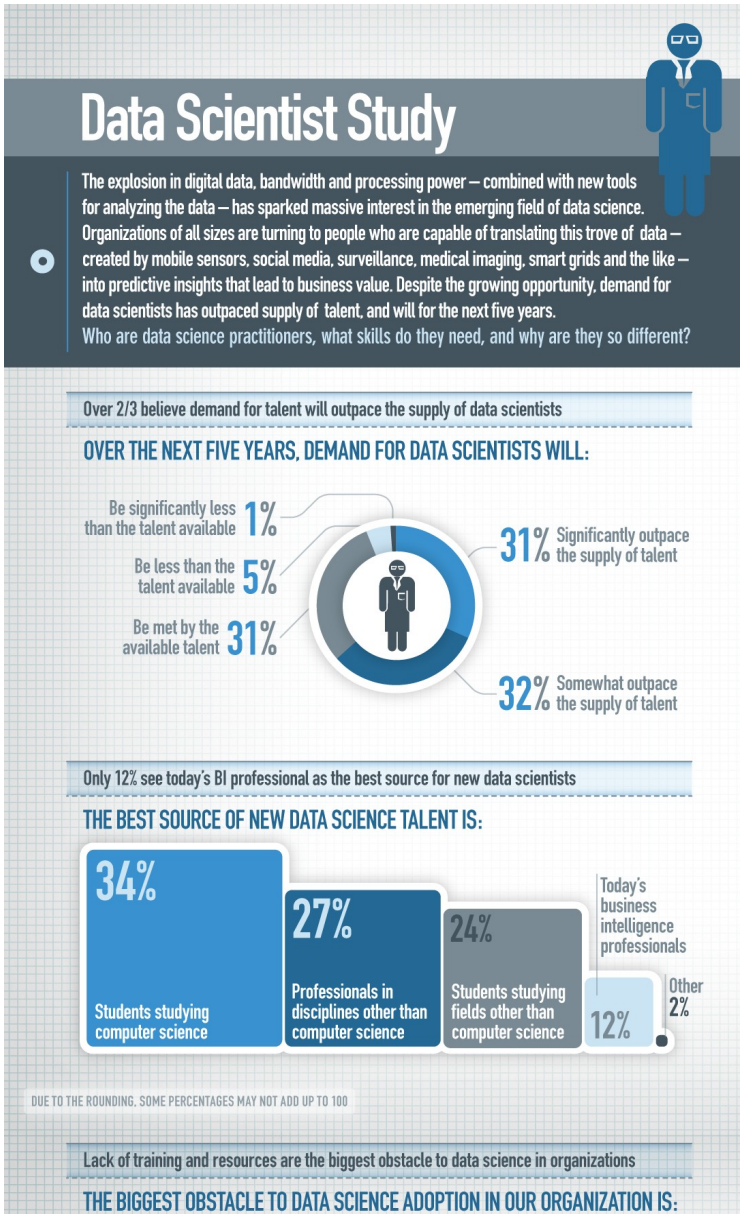

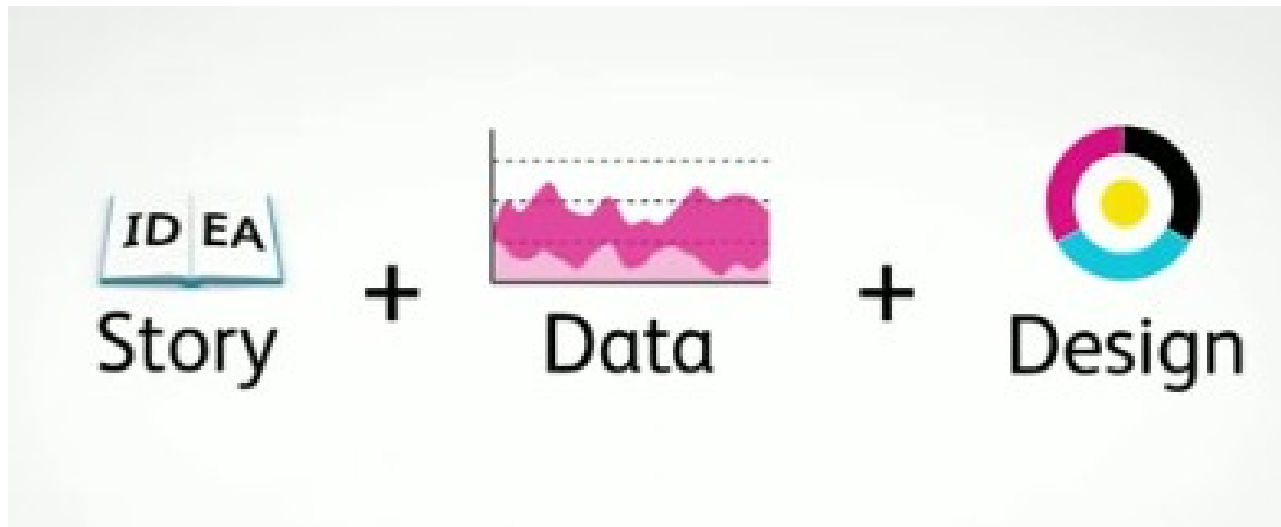

參考來源：未來「夯」職業：資料科學家 http://www.bnext.com.tw/print/article/id/21740
淺談超吸睛的資訊圖表 http://www.inside.com.tw/2011/04/13/infographics

Applications of Data Analysis
資料分析的應用 - 商業智慧 (BI)

圖片來源： http://bizcubic.com/wp-content/uploads/2010/01/business-intelligence-dashboard.jpg

Applications of Data Discovery
數位鑑識 - 資訊與法律的結合

電腦鑑識&會計鑑識

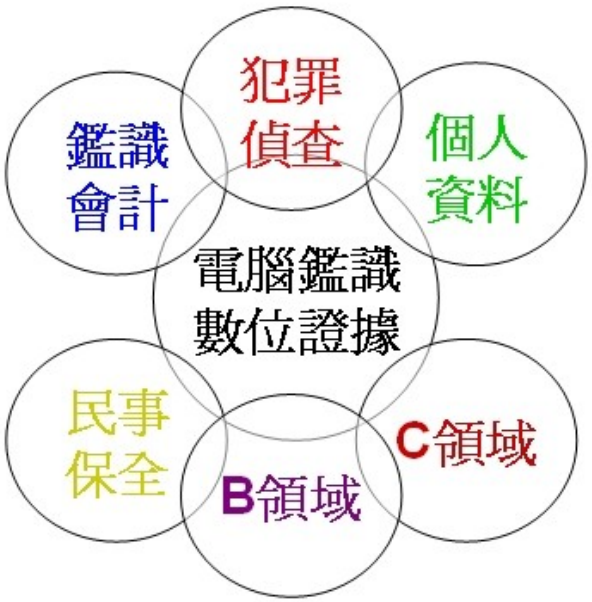

http://blog.udn.com/kf0630/6018593

http://www.solventosoft.com/upload/ANPR_02s.gif

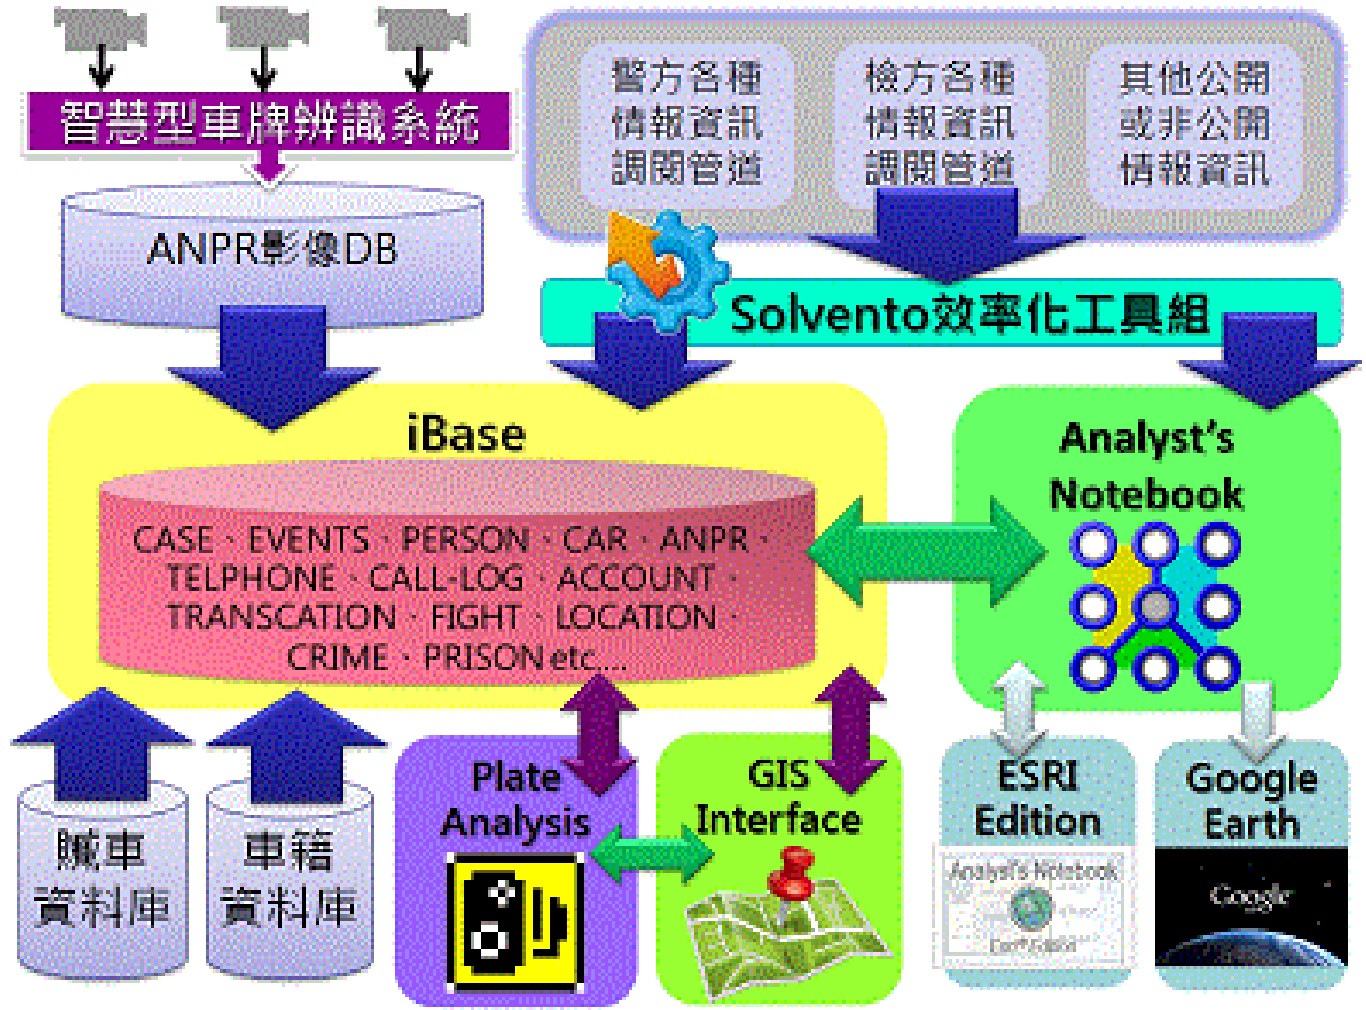

Data, Information, Knowledge, Wisdom
知識管理模型：資料、資訊、知識與智慧

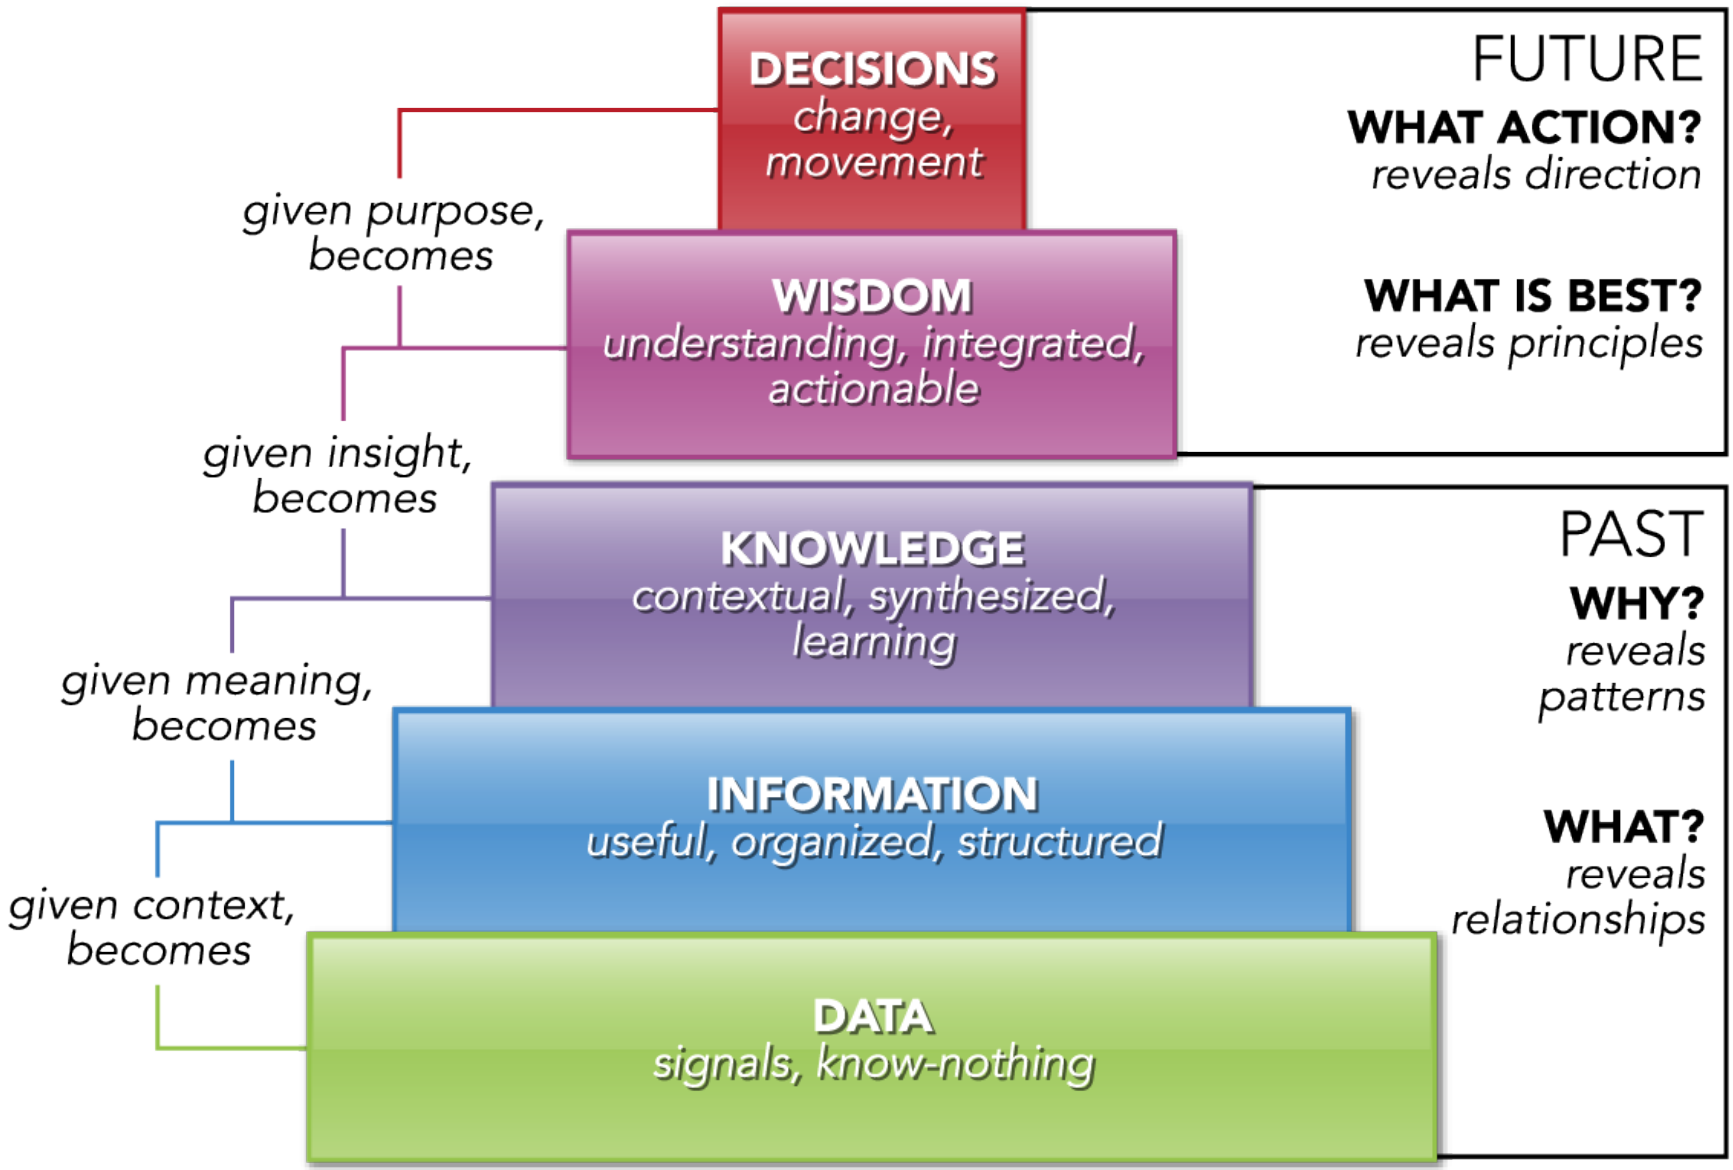

http://www.pursuantgroup.com/blog/tag/dikw-model/

The SMAQ stack for big data
巨量資料處理的資訊架構

做網頁相關的人可能聽過 LAMP

未來處理海量資料的人必需知道 SMAQ（Storage, MapReduce and Query）

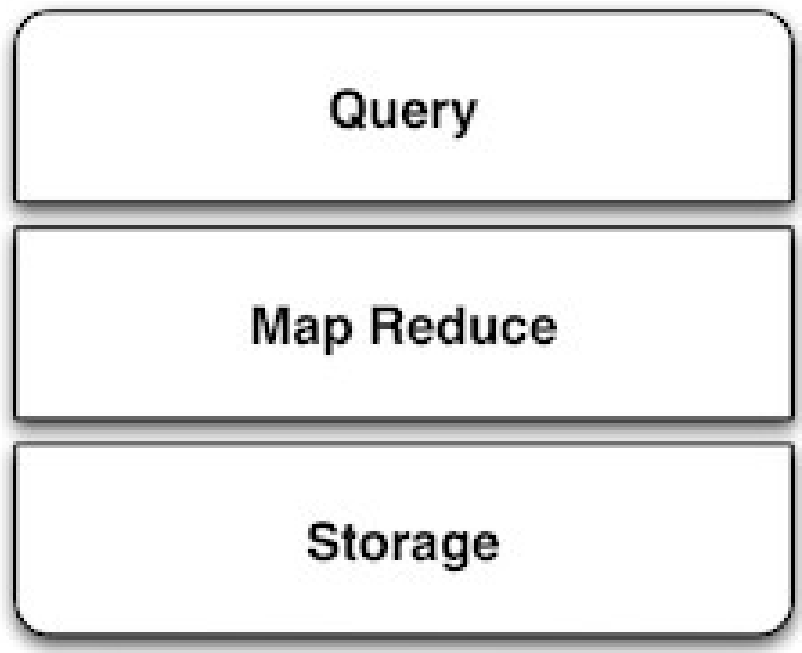

參考來源：The SMAQ stack for big data，Edd Dumbill，22 September 2010，http://radar.oreilly.com/2010/09/the-smaq-stack-for-big-data.html

圖片來源：http://smashingweb.ge6.org/wp-content/uploads/2011/10/apache-php-mysql-ubuntu.png

The SMAQ stack for big data
巨量資料處理的資訊架構

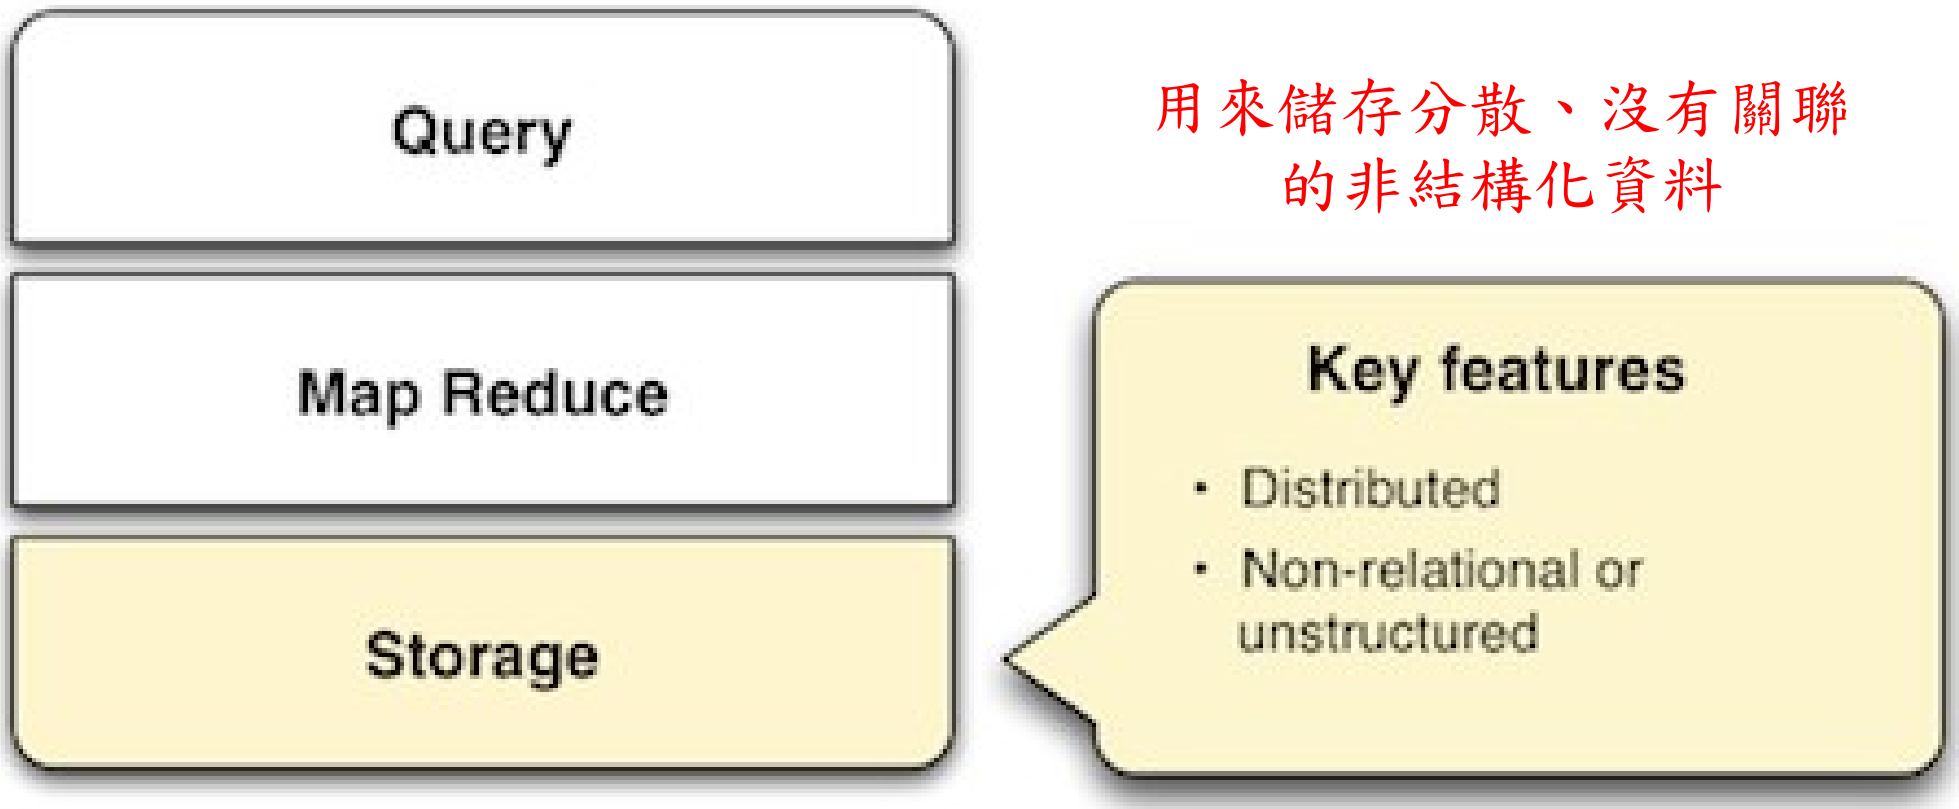

用來儲存分散、沒有關聯的非結構化資料

參考來源：The SMAQ stack for big data，Edd Dumbill，22 September 2010，http://radar.oreilly.com/2010/09/the-smaq-stack-for-big-data.html

The SMAQ stack for big data
巨量資料處理的資訊架構

運用批次處理的方式，將運算工作平均分散到許多的伺服器做運算。

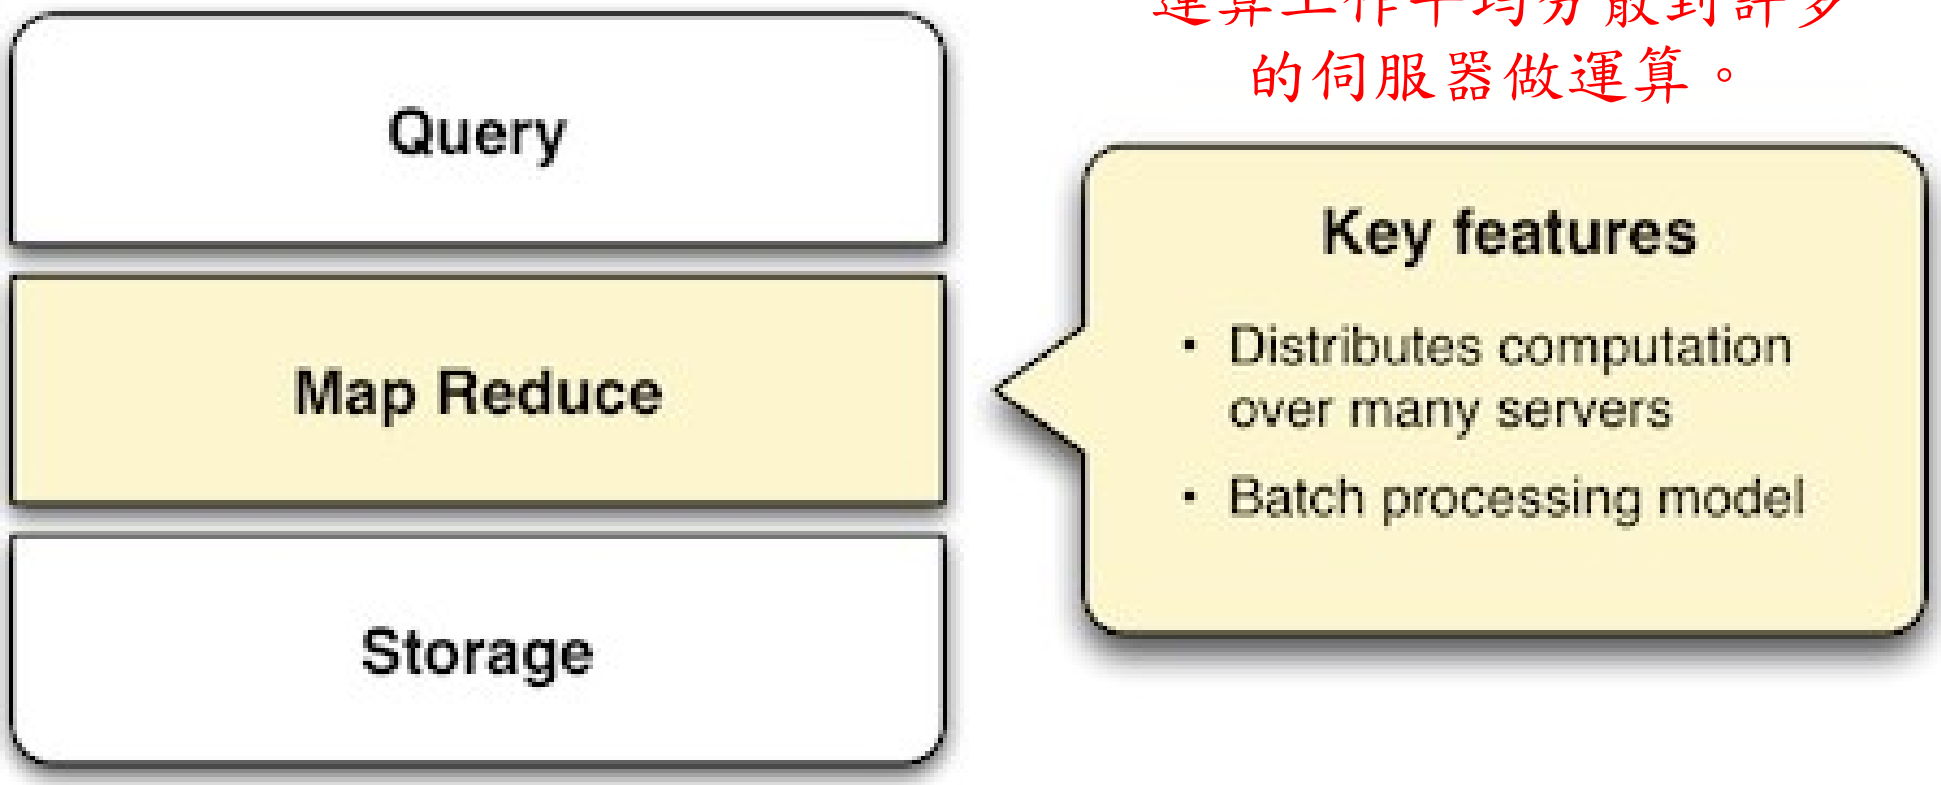

參考來源：The SMAQ stack for big data，Edd Dumbill，22 September 2010，http://radar.oreilly.com/2010/09/the-smaq-stack-for-big-data.html

The SMAQ stack for big data
巨量資料處理的資訊架構

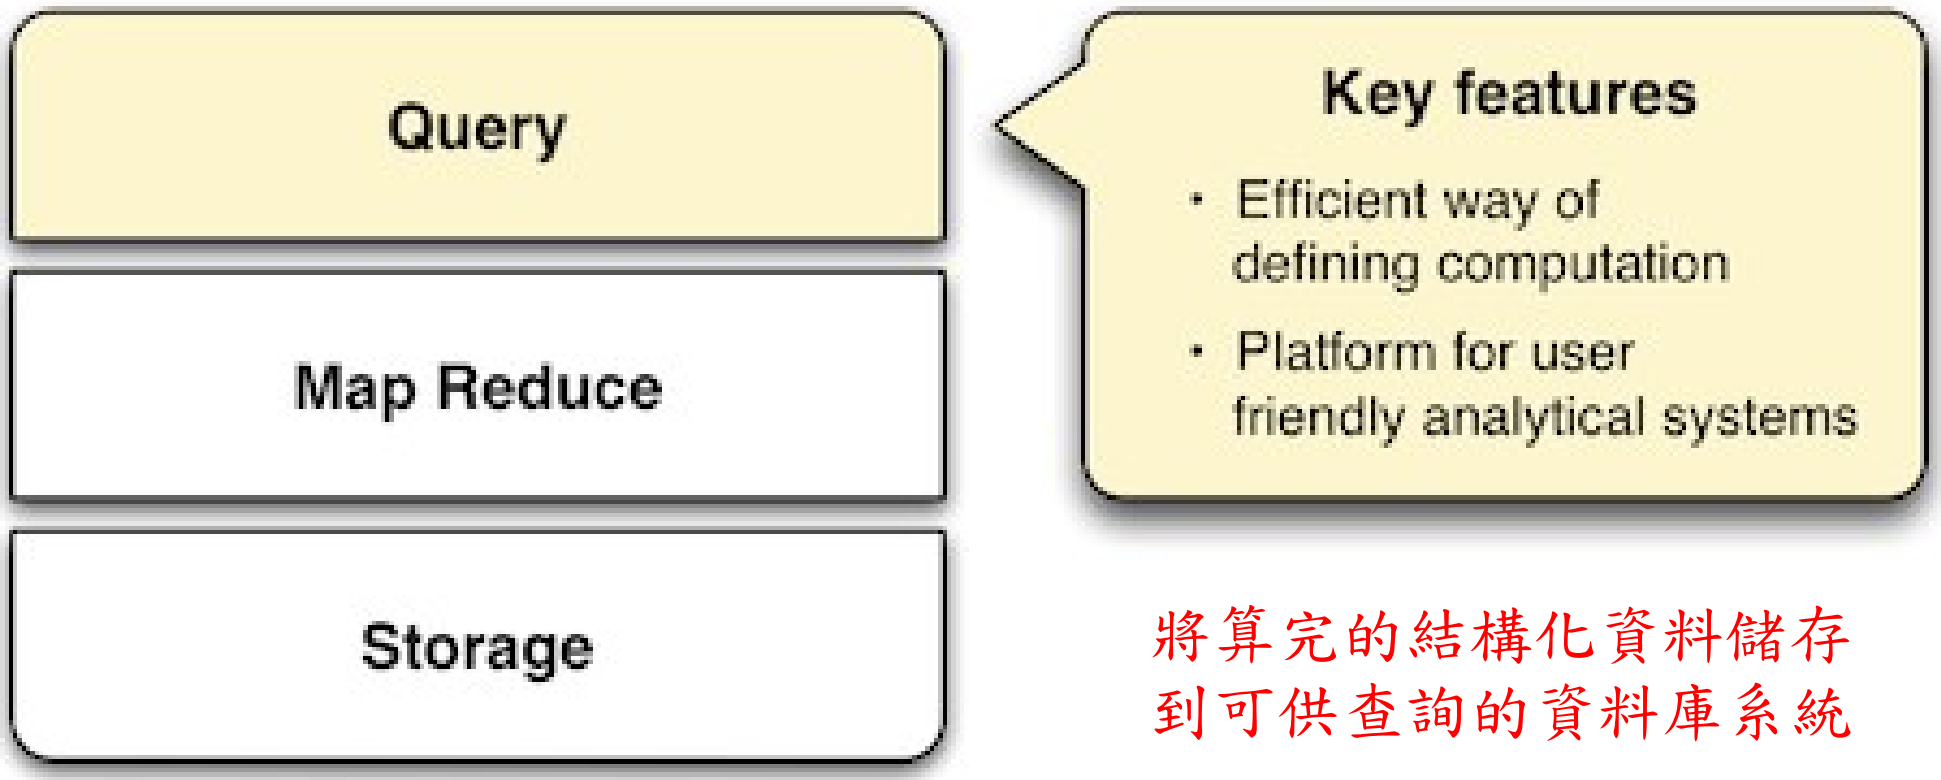

將算完的結構化資料儲存到可供查詢的資料庫系統

參考來源：The SMAQ stack for big data，Edd Dumbill，22 September 2010，http://radar.oreilly.com/2010/09/the-smaq-stack-for-big-data.html

Three Core Technologies of Google ....
Google 的三大關鍵技術 ....

- Google 在一些會議分享他們的三大關鍵技術
- Google shared their design of web-search engine
  - SOSP 2003 :
  - "The Google File System"
  - http://labs.google.com/papers/gfs.html
  - OSDI 2004 :
  - "MapReduce : Simplifed Data Processing on Large Cluster"
  - http://labs.google.com/papers/mapreduce.html
  - OSDI 2006 :
  - "Bigtable: A Distributed Storage System for Structured Data"
  - http://labs.google.com/papers/bigtable-osdi06.pdf

Open Source Mapping of Google Core Technologies
Google 三大關鍵技術對應的自由軟體

BigTable A huge key-value datastore	HBase, Hypertable Cassandra, ...
MapReduce To parallel process data	Hadoop MapReduce API Sphere MapReduce API, ...
Google File System To store petabytes of data	Hadoop Distributed File System (HDFS) Sector Distributed File System

更多不同語言的 MapReduce API 實作：
http://trac.nchc.org.tw/grid/intertrac/wiki%3Ajazz/09-04-14%23MapReduce

其他值得觀察的分散式檔案系統：

- IBM GPFS - http://www-03.ibm.com/systems/software/gpfs/
- Lustre - http://www.lustre.org/
- Ceph - http://ceph.newdream.net/

Hadoop

- http://hadoop.apache.org
- Hadoop 是 Apache Top Level 開發專案
- **Hadoop is Apache Top Level Project**
- 目前主要由 Yahoo! 資助、開發與運用
- **Major sponsor is Yahoo!**
- 創始者是 Doug Cutting ，參考 Google Filesystem
- **Developed by Doug Cutting, Reference from Google Filesystem**
- 以 Java 開發，提供 HDFS 與 MapReduce API 。
- **Written by Java, it provides HDFS and MapReduce API**
- 2006 年使用在 Yahoo 內部服務中
- **Used in Yahoo since year 2006**
- 已佈署於上千個節點。
- **It had been deploy to 4000+ nodes in Yahoo**
- 處理 Petabyte 等級資料量。
- **Design to process dataset in Petabyte**

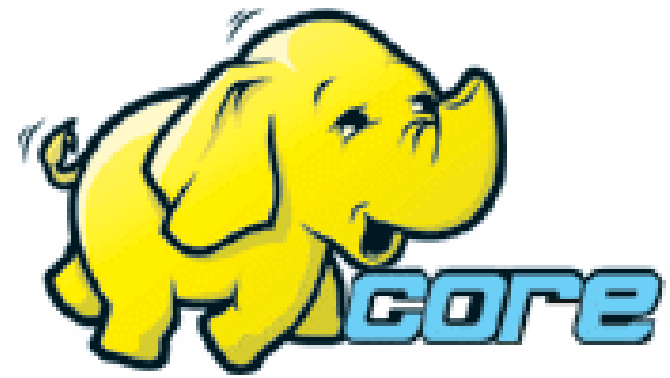

Facebook、**Last.fm**、**Joost** are also powered by Hadoop

Sector / Sphere

- http://sector.sourceforge.net/
- 由美國資料探勘中心研發的自由軟體專案。
- **Developed by National Center for Data Mining, USA**
- 採用 C/C++ 語言撰寫，因此效能較 Hadoop 更好。
- **Written by C/C++, so performance is better than Hadoop**
- 提供「類似」 Google File System 與 MapReduce 的機制
- **Provide file system similar to Google File System and MapReduce API**
- 基於UDT高效率網路協定來加速資料傳輸效率
- **Based on UDT which enhance the network performance**
- Open Cloud Testbed有提供測試環境，並開發MalStone效能評比軟體
- **Open Cloud Consortium provide Open Cloud Testbed and develop MalStone toolkit for benchmark**

Sector-Sphere

National Center for Data Mining
University of Illinois at Chicago
UIC

open data
Open Data Group
http://www.opendatagroup.com/

Why we choice Hadoop? Good Ecosystem!

豐富的生態系建構出處理海量資料的工具庫

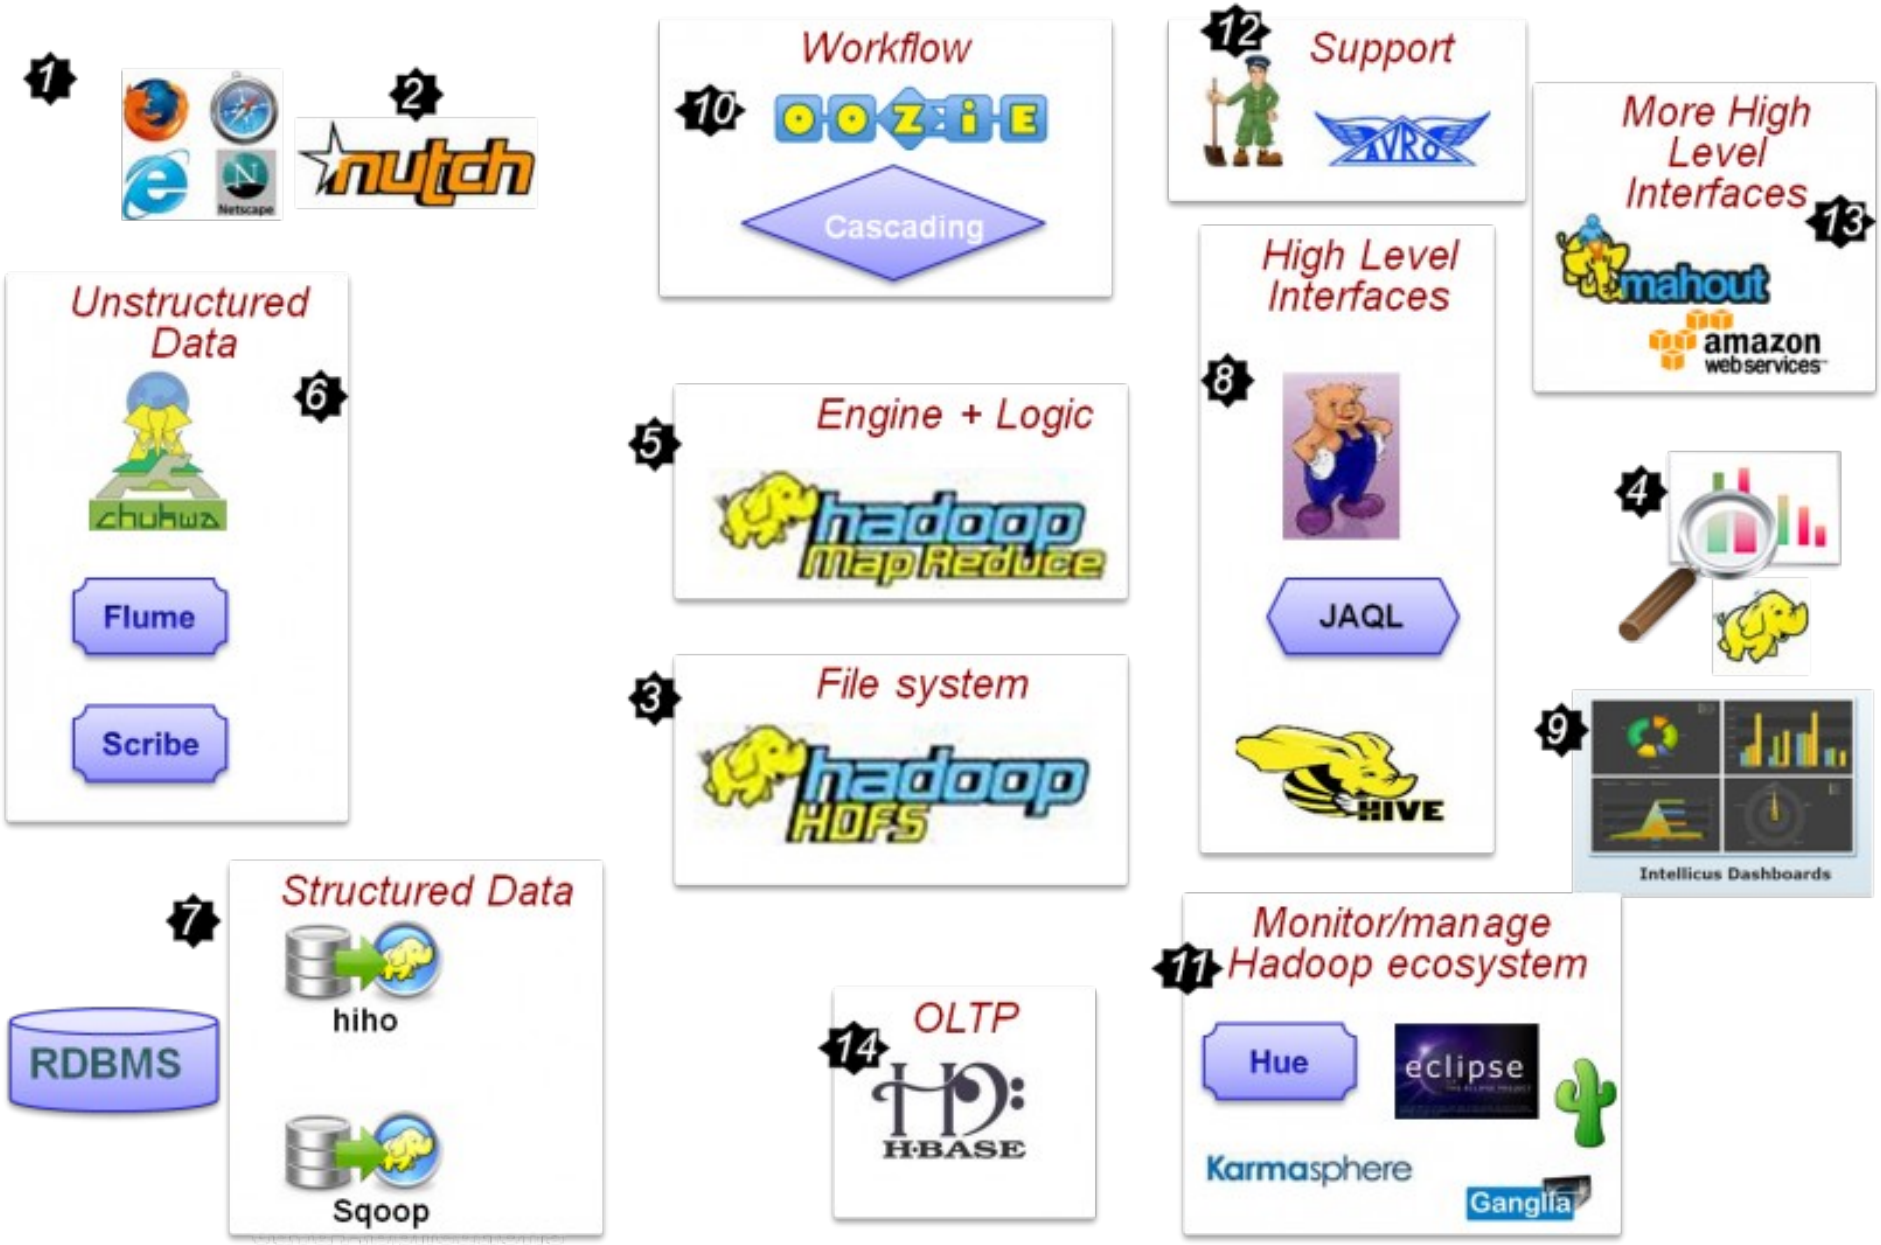

http://rationalintelligence.com/wp_log/?p=104

BI and EDW build on Hadoop Ecosystem

運用 Hadoop 生態系搭建資料倉儲與商業智慧分析

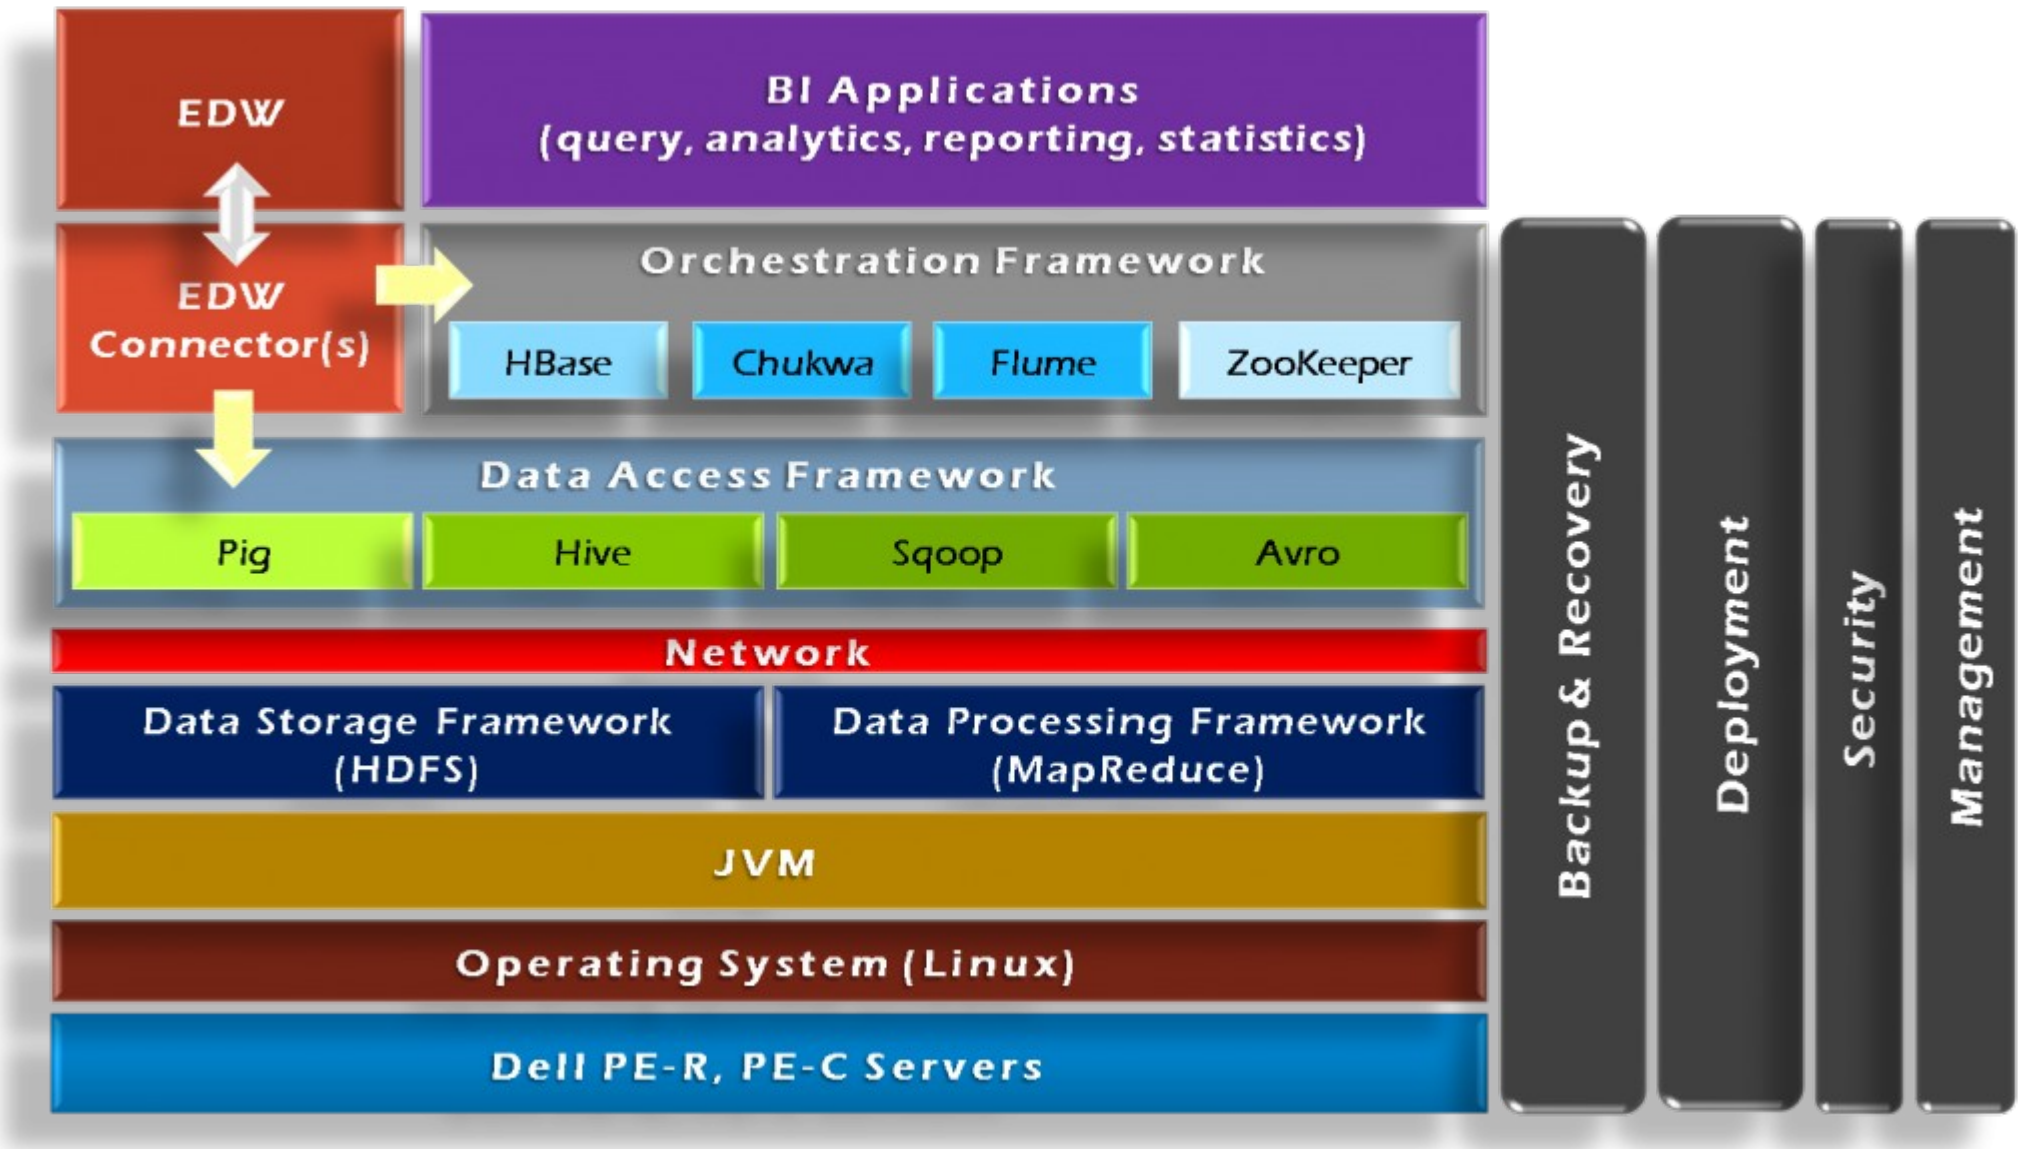

http://rationalintelligence.com/wp_log/?p=104

Build your own search engine, too
您也能用 Hadoop 搭建自己的搜尋引擎

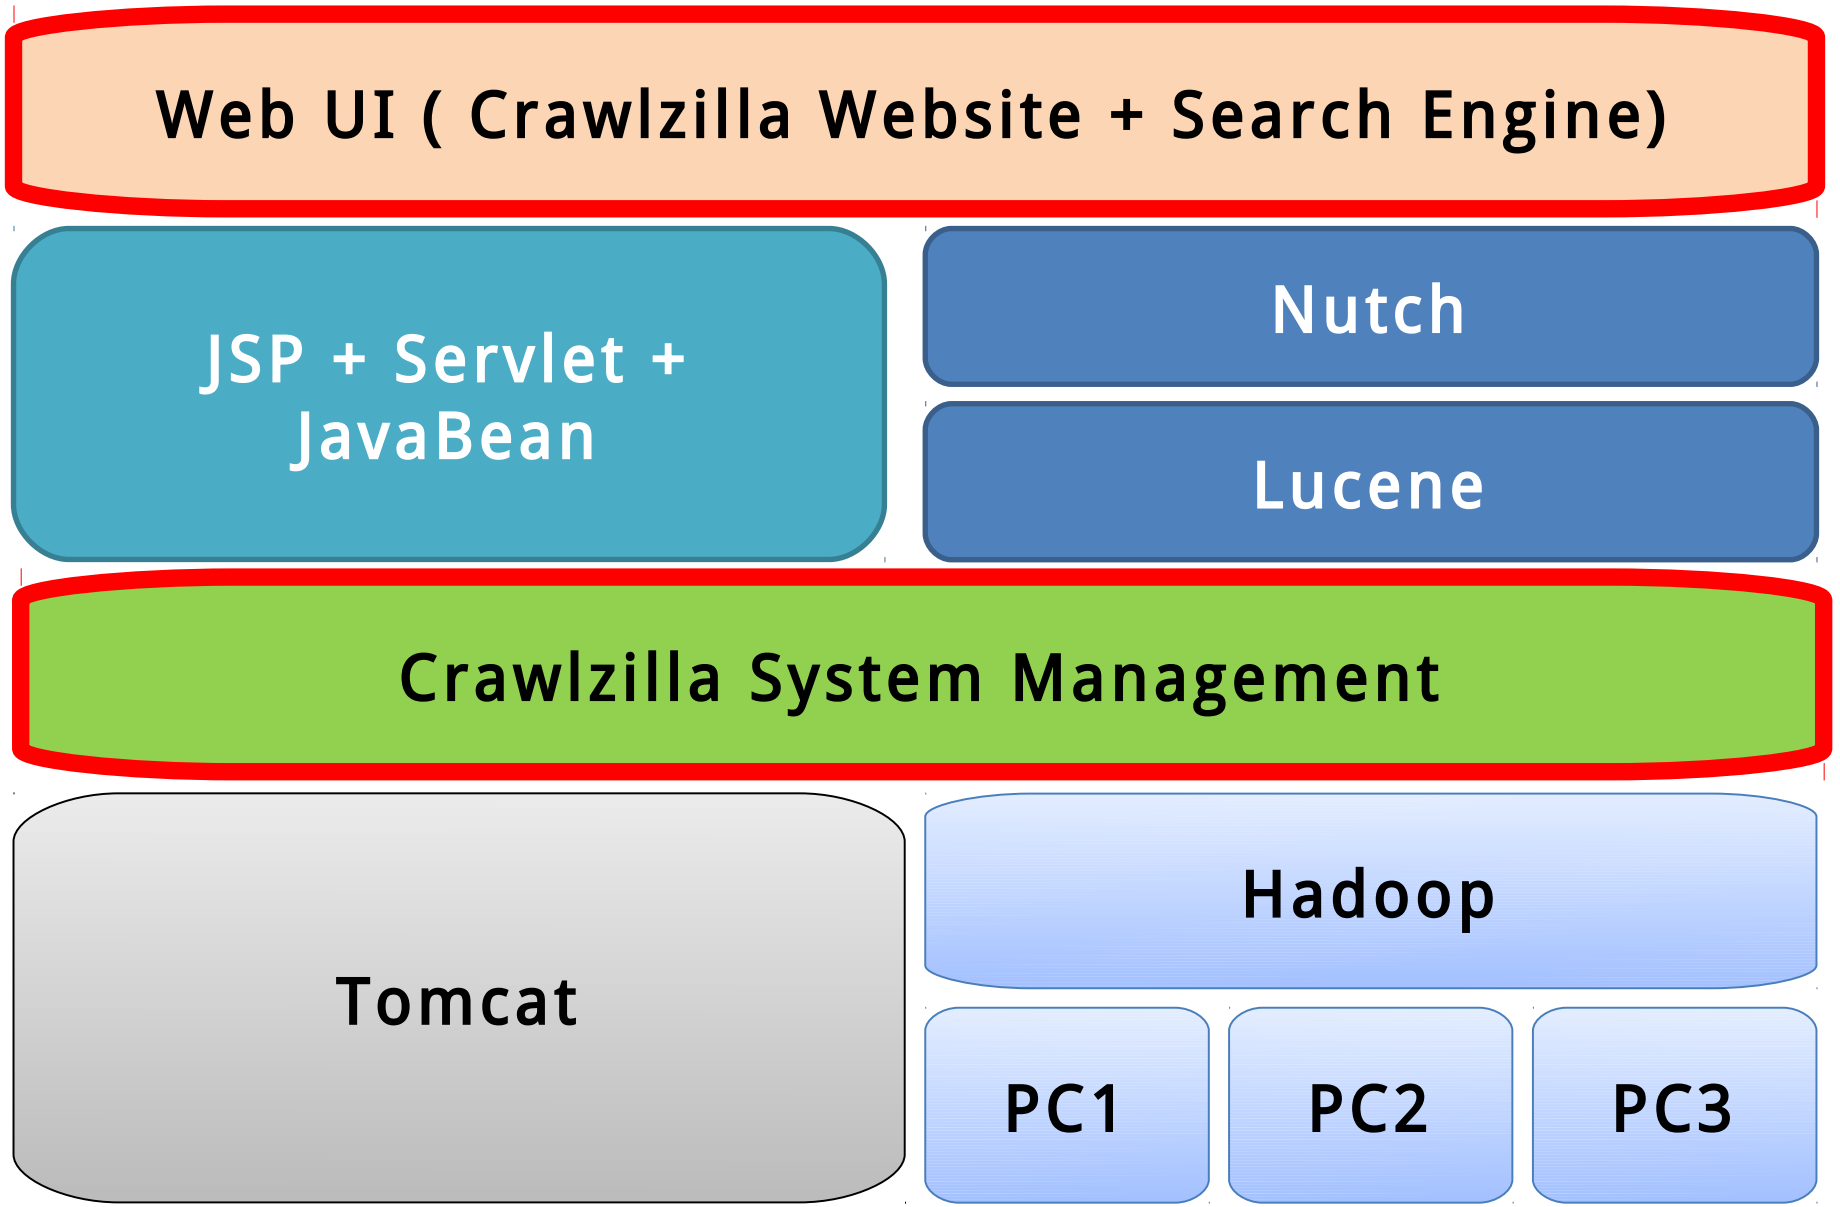

Microsoft love Hadoop, too
微軟幫 Azure 還有 SQL Server 都接上 Hadoop

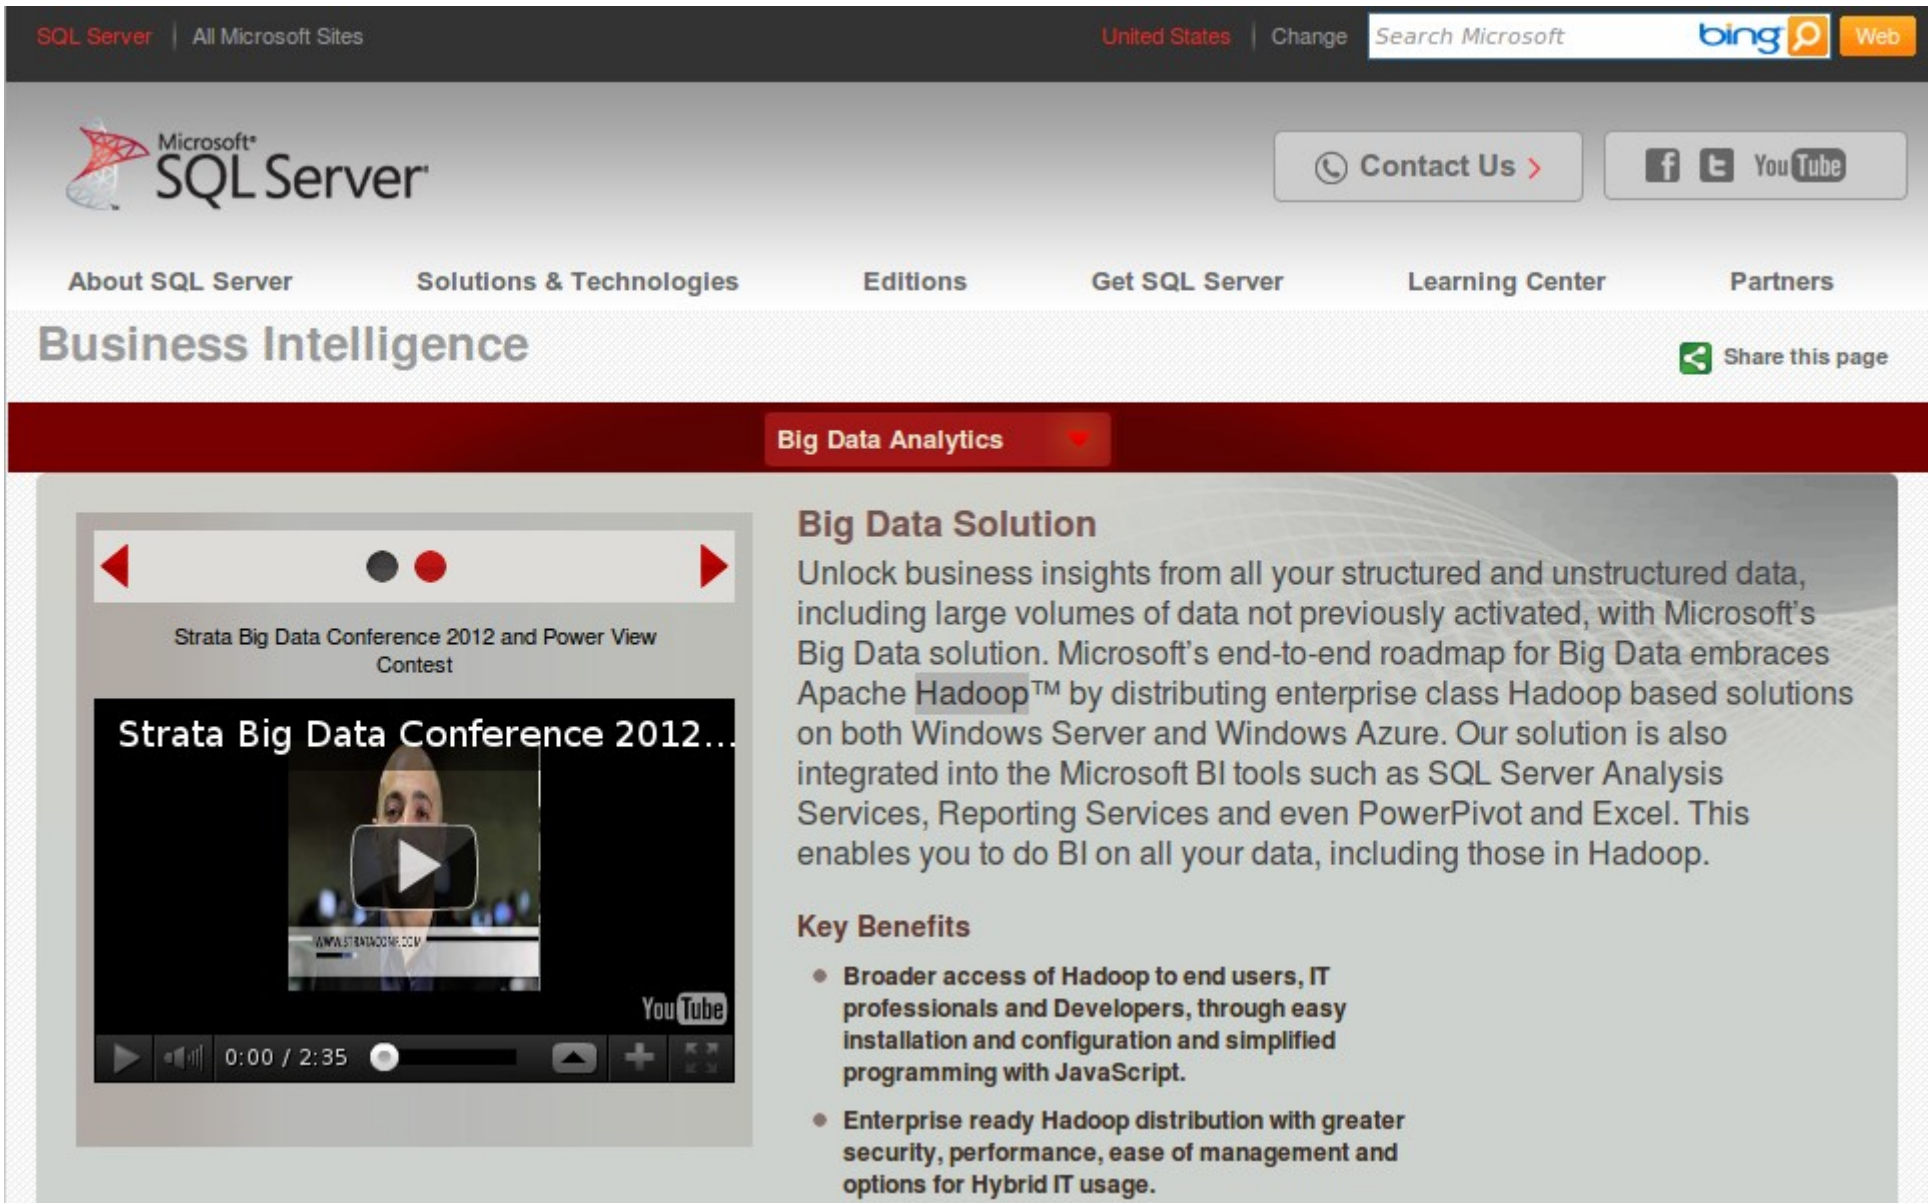

參考來源：Big Data Solution | Microsoft SQL Server 2008 R2
http://www.microsoft.com/sqlserver/en/us/solutions-technologies/business-intelligence/big-data-solution.aspx

Oracle love Hadoop, too
Oracle 也接上 Hadoop

CNET › News › Software, Interrupted

Cloudera teams up to connect Oracle and Hadoop

Cloudera and Quest software are partnering to provide connectivity between Oracle and Hadoop.

by Dave Rosenberg | June 21, 2010 5:30 AM PDT

Follow

This week Cloudera, a provider of software and services for the Apache Hadoop project, is set to announce a partnership with Quest Software to develop, support, and distribute an Oracle connector for Hadoop.

參考來源：Cloudera teams up to connect Oracle and Hadoop
http://news.cnet.com/8301-13846_3-20008242-62.html

Hinet Application of Big Data
中華電信已經在做的海量資料應用

Business Next 數位時代

中華電信：分析駭客行為，拓展對外新服務

撰文者：趙郁竹

發表日期：2012-03-06

[214期雜誌精選]

全台最大的中華電信提供行動電話、市話、寬頻固網、MOD……，各種業務服務，加起來的用戶數就有3000萬，比全台灣人口還多，光是單月帳務數量就高達100億筆資料。除了電信、寬頻服務，還有日益增加的數位服務、行動加值服務，從服務內容到客戶端，累積出的資料相當驚人。

「資料量越來越大，日常分析工作需要很多時間，但新的運算技術有效解決了這個問題，」中華電信資訊處處長陳明仕說。2010年開始，因為中華電信本身的資料運算需求，採用分散式運算架構Hadoop技術，打造出大資料運算平台，不但解決了自身的資料問題，還能對外提供資料運算應用。

以MOD為例，一天有幾千萬筆資料，如何找出使用者在什麼時段做了什麼事？廣告效益又如何？「用傳統的方法，需要400分鐘才能分析完；用Hadoop大資料平台，13分鐘就能解決，節省非常多時間，」他說。

追蹤再拆解

大資料運算技術除了節省時間，還能防止駭客入侵。「駭客的攻擊行為都有模式可循，」陳明仕解釋，就像球賽一樣，了解進攻模式就能防守。用戶的資料保護是第一要務，因此透過行為模式分析，能有效保護企業資訊安全，也保障客戶的個資安全。

參考來源：中華電信：分析駭客行為，拓展對外新服務，發表日期： 2012-03-06
http://www.bnext.com.tw/print/article/id/22333

Hinet Application of Big Data
中華電信已經在做的海量資料應用

iT ithome.com.tw

中華電信用Hadoop技術分析通話明細

READ LATER

面對資料快速成長以及非結構性資料的增加，中華電信資訊處第四科科長楊秀一表示，中華電信近來利用Hadoop雲端運算技術自行開發了一個專門用來分析非結構化資料的巨量資料（Big Data）運算平臺，嘗試在資料進到資料倉儲系統之前，先進行資料的分析與處理以減少資料倉儲的資料量。

近年來行動語音市場趨於飽和，為了掌握用戶特性進行客製化行銷，一份資料要進行分析，就會被多次複製，因此即使用戶增加趨緩，但中華電信擁有的資料量仍快速暴增。

中華電信用來分析的資料模型最早於10多年前已有雛形，但當初主要用於行動語音分析。一直到2009年，他們完整導入Teradata的電信業邏輯資料模型cLDM 9.0版，整合更多電信服務的用戶資料。楊秀一表示，當初導入該模型的目的主要是為了整合行動語音、固網、數據的資料，進行以人為中心的分析模式。在導入之前，中華電信的資料模型是以設備為中心，因為不同設備的記錄資料儲存在不同的資料庫，無法進行整合性的分析。

參考來源：中華電信用 Hadoop 技術分析通話明細，發表日期： 2011-06-12
http://www.ithome.com.tw/itadm/article.php?c=68023

台灣 Hadoop 社群發展現況與未來展望

Hadoop.TW : Now and Future

Jazz Yao-Tsung Wang

王耀聰 <jazz@nchc.org.tw>

Co-founder of Hadoop.TW

Free Software Lab,STD,NCHC,NARL,Taiwan

2013/3/27 @ Big Data Taiwan 2013



WHO AM I？ 這傢伙是誰啊？JAZZ？

- 講者介紹：
  - 國網中心　王耀聰　副研究員 / 交大電控八九級碩士
  - 今天我是以台灣 Hadoop 社群傳教士的身份發言
  - jazz@nchc.org.tw
- 所有投影片、參考資料與操作步驟均在網路上
  - http://trac.nchc.org.tw/cloud
  - 由於雲端資訊變動太快，愛護地球，請減少不必要之列印。

FOSS 使用者

Debian/Ubutnu
Access Grid
Motion/VLC
Red5
Debian Router
DRBL/Clonezilla
Hadoop

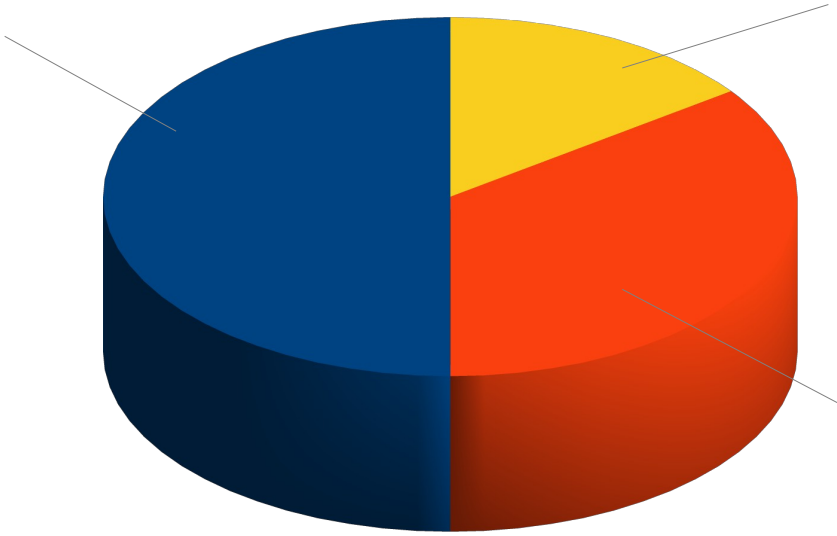

行動力薄弱的開發者

TRTC WSU/
Haduzilla /
Hadop4Win / Ezilla

推廣者

DRBL/Clonezilla
Partclone/Tuxboot
Hadoop Ecosystem

演講大綱 Agena

- 過去 **PAST**
  - **NCHC Cloud Research Group (2008.1~Now)**
  - **Taiwan Hadoop User Group (2008.8~Now)**
  - **Hadoop in Taiwan (2012.10~Now)**
- 現在 **NOW**
  - 巨量資料的奇幻漂流 **Life of Big Data**
  - 相關社群的群聚分析 **SNA of Communities**
- 未來 **FUTURE**
  - 從產業供應鏈的觀點 **Supply Chain of Big Data**
  - 從社群談未來的展望 **Actions driven from SNA**

Let's Go Back to Year 2007

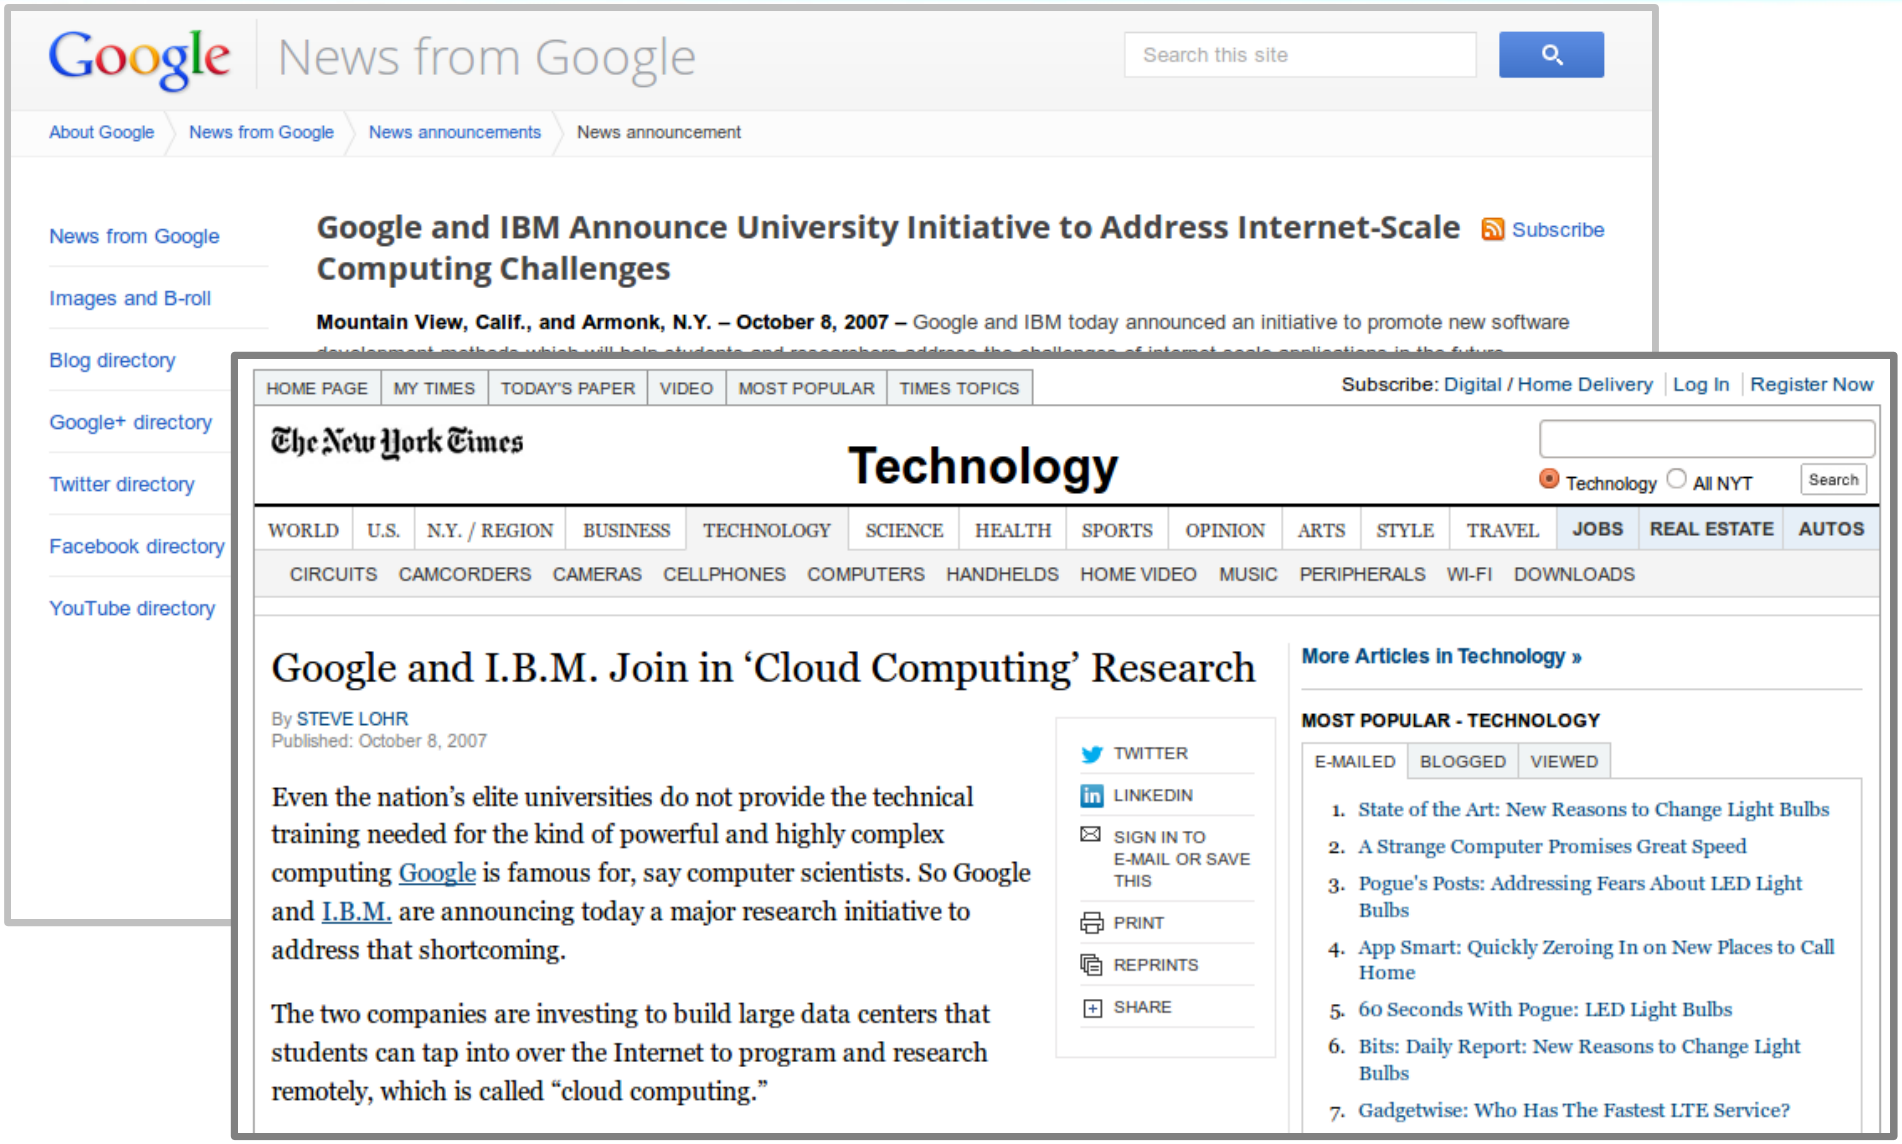

Google | News from Google

Search this site

About Google › News from Google › News announcements › News announcement

- News from Google
- Images and B-roll
- Blog directory
- Google+ directory
- Twitter directory
- Facebook directory
- YouTube directory

Google and IBM Announce University Initiative to Address Internet-Scale Computing Challenges

Subscribe

Mountain View, Calif., and Armonk, N.Y. – October 8, 2007 – Google and IBM today announced an initiative to promote new software

HOME PAGE | MY TIMES | TODAY'S PAPER | VIDEO | MOST POPULAR | TIMES TOPICS

Subscribe: Digital / Home Delivery | Log In | Register Now

The New York Times

Technology

Technology / All NYT | Search

WORLD | U.S. | N.Y. / REGION | BUSINESS | TECHNOLOGY | SCIENCE | HEALTH | SPORTS | OPINION | ARTS | STYLE | TRAVEL | JOBS | REAL ESTATE | AUTOS

CIRCUITS | CAMCORDERS | CAMERAS | CELLPHONES | COMPUTERS | HANDHELDS | HOME VIDEO | MUSIC | PERIPHERALS | WI-FI | DOWNLOADS

Google and I.B.M. Join in 'Cloud Computing' Research

By STEVE LOHR
Published: October 8, 2007

Even the nation's elite universities do not provide the technical training needed for the kind of powerful and highly complex computing Google is famous for, say computer scientists. So Google and I.B.M. are announcing today a major research initiative to address that shortcoming.

The two companies are investing to build large data centers that students can tap into over the Internet to program and research remotely, which is called "cloud computing."

TWITTER
LINKEDIN
SIGN IN TO E-MAIL OR SAVE THIS
PRINT
REPRINTS
SHARE

More Articles in Technology »

MOST POPULAR - TECHNOLOGY

E-MAILED | BLOGGED | VIEWED

1. State of the Art: New Reasons to Change Light Bulbs
2. A Strange Computer Promises Great Speed
3. Pogue's Posts: Addressing Fears About LED Light Bulbs
4. App Smart: Quickly Zeroing In on New Places to Call Home
5. 60 Seconds With Pogue: LED Light Bulbs
6. Bits: Daily Report: New Reasons to Change Light Bulbs
7. Gadgetwise: Who Has The Fastest LTE Service?

Source: http://googlepress.blogspot.tw/2007/10/google-and-ibm-announce-university_08.html (2007-10-08)
Source: http://www.nytimes.com/2007/10/08/technology/08cloud.html (2007-10-08)

From Data Grid to Cloud Computing

2008/01/28　trac.nchc.org.tw 開張

http://trac.nchc.org.tw/grid , http://trac.nchc.org.tw/cloud

2008/01/28

From Data Grid to Cloud Computing

Era of Gird Computing

Data Grid
Cluster File System

Amazon :
Virtualization

Xen, KVM,
Eucalyptus,
OpenNebula

Google / IBM :

Hadoop?!
BigTable,
HBase,
HyperTable

Era of Cloud Computing ?

2008/01/28

2008/4/12 OSDC.TW 2008 - Vivek Ratan

Source: http://farm4.staticflickr.com/3185/2406795223_9ed1366c9c_z.jpg
Source: http://farm3.staticflickr.com/2022/2407601434_cf9c65eb13_b.jpg
Source: http://blog.osdc.tw/2008/03/speaker_vivek_ratan.html
Source: http://blog.osdc.tw/2008/03/talk_hadoop.html

Vivek Ratan
Yahoo! (2008)
Amazon (Now)

2008/01/28
2008/04/12

2008/4/28 hadoop.tw 註冊 By 蔡奕楷

```
jazz@jazzbook:~$ whois hadoop.tw
Domain Name: hadoop.tw

   Contact:
      [redacted]
      [redacted]


   Record expires on 2013-04-29 (YYYY-MM-DD)
   Record created on 2008-04-28 (YYYY-MM-DD)


Registration Service Provider:
```


蔡奕楷 **Yi-Kai Tsai**

Yahoo! TW (Now)

http://www.hadoop.tw

2008/08/16 開張

嘗試邀請 **Vivek** 再度訪台 **(X)**

2008/10/16 加入

2008/12/08 移機

Hadoop Taiwan User Group

August 2008 Archives

What is Hadoop ?

By yikai on August 16, 2008 5:17 PM | Permalink | Comments (0) | TrackBacks (0)

Hadoop 是 Apache 軟體基金會 旗下的一個計畫,是為了開發一套提供可靠性(reliable),延展性(scalable)以及分散式計算(distributed computing)的開源軟體, 目前包括下列子計畫:

- Hadoop 核心, 目前的旗艦子計畫, 提供分散式檔案系統 (HDFS) 並支援 MapReduce 分散式計算模式.
- HBase, 依據 Hadoop 核心打造, 提供具有延展性的分散式資料庫系統.
- ZooKeeper, 一套高可靠度的協調管理系統, 分散式應用軟體使用 ZooKpeer 來保存,協調重要的共享資料更新.

Hadoop 原本是為了 Nutch , 一個 Apache 軟體基金會旗下的搜尋引擎系統所設計打造的基礎建設 Framework, 之後 Google 相繼發布了 Google File System 和 MapReduce 等 papers, 它們正是 Nutch 計畫所需要的, 因此 Nutch 計畫新增了 HDFS 跟 MapReduce 運算模式的實作.

Hadoop Map Reduce 模式	HBase 資料庫系統
HDFS (Hadoop Distributed File System) 檔案系統	

2006 年, Hadoop 之父 Doug Cutting 應 Yahoo! 之邀加入公司,專職從事 Hadoop 計畫的開發工作, 而 Hadoop 本身也從 Ntuch 計畫正式獨立出來, 2008 三月 Hadoop 升格成為 Apache 軟體基金會的頂級計畫(Top Level Project), 而 Yahoo! 目前是 Hadoop 核心計畫和ZooKeeper 計畫的主要貢獻者.

Hadoop 核心已經被證實可在 2000 台機器上執行, 目前的設計目標是朝向 10,000 台機器. 已經有許多不同的公司和組織分別使用 Hadoop 從事研究或是產品開發的工作, 像是 Yahoo! 搜尋引擎的 Webmap 建立, Amazon 的 EC2/S3 服務, 甚至 Google 也使用 Hadoop 和學術單位進行合作計畫等.

Sponsored By

NCHC

YAHOO! SEARCH

2008/01/28 2008/04/12 2008/04/28 **2008/08/16**

2008/11/04 Hadoop @ NCHC - Devaraj Das

Devaraj Das
Yahoo! (2008)
Co-founder of Hortonworks (Now)

國網中心邀請演講資訊

Hadoop 與雲端運算

雲端運算為 2008 年重大 IT 熱門議題，而 Hadoop 為 Apache Software Foundation 所開發之自由軟體，目前已廣泛應用於 Amazon 與 Yahoo! 等雲端運算服務提供者的格網架構之上。

Devaraj Das 是 Yahoo! Bangalore Grid Computing Group 的 Engineering Manager，亦為 Apache Committer，對於 Hadoop 有多年的開發經驗。此外， Yahoo! Bangalore Grid Computing Group 著重於如何打造足以處理 Peta-bytes 資料，由數千台主機組成的格網架構，將帶給中心從事格網相關研究的同仁來自於產業界的開發經驗分享。

講者簡歷

Devaraj Das (ddas@...) is the Engineering Manager of the Grid Computing group at Yahoo! Bangalore. He graduated with a Masters degree in Computer Science from Indian Institute of Science, Bangalore. Prior to Yahoo!, Devaraj was with HP. Devaraj is an Apache committer.

The Grid Computing group at Yahoo! Bangalore focuses on Grid frameworks that scale to thousands of machines and handle peta-bytes of data. The group is especially involved in the development of the Open Source Hadoop platform and its deployment within Yahoo!.

2008-11-04 上午

- 時間: 11/04 星期二　上午　11:00 - 12:30
- 地點: 國家高速網路與計算中心　北群多媒體教室（新竹市研發六路七號）

Source: http://trac.nchc.org.tw/cloud/wiki/HadoopWorkshop

2008/01/28
2008/04/12
2008/04/28
2008/08/16
2008/11/04

2008/11/03 開始實驗 **DRBL** 與 **Hadoop** 結合的方法
<BUG> HDFS 無法識別 **NFS** 的空間，也因為這段經驗
造就了 **2009/4/13 Hadoop** 雲端運算實驗平台的誕生

2009/4/1 Connected with Cloudera

Tom White
Cloudera (Now)
Hadoop 技術手冊
原作者

2008/12/19 寫信給 **Tom White** 說要翻譯中文版
2009/03/30 NCHC 開辦第一次 **Hadoop** 課程
2009/04/01 Tom White 介紹 **Clouera VP**
Christophe Bisciglia 與 **Todd Lipcon** 給我認識

Todd Lipcon
Cloudera (Now)

Christophe Bisciglia
Cloudera (2009)
WibiData (Now)

2008/01/28
2008/04/12
2008/04/28
2008/08/16
2008/11/04
2009/04/01

2009/03/27 Hadoop.TW 釋出 0.18 DEB 套件
Source: http://www.hadoop.tw/2009/03/-hadoop-0183-debian-ubuntu.html

2009/4/13 開放 hadoop.nchc.org.tw
2009/11/10 第一屆台灣 Hadoop 使用者社群會議

```
jazz@hadoop:~$ apt-cache show hadoop-0.20
Package: hadoop-0.20
Status: install ok installed
Priority: extra
Section: misc
Installed-Size: 42320
Maintainer: Todd Lipcon <todd@cloudera.com>
Architecture: all
Version: 0.20.1+169.113-1~lenny-cdh2
```

NCHC DRBL + Cloudera CDH2 DEB

2009/04/13 1st Hadoop Public Cluster
http://hadoop.nchc.org.tw

2009/11/10 1st Taiwan Hadoop User Group
2009/11/19 Taiwan Hadoop Forum
http://forum.hadoop.tw/

台灣 Hadoop 使用者社群會議

「雲端運算與應用」系列演講(一)>>

感謝各界熱烈報名，也感謝親臨現場的同好們抽空一同共襄盛舉。
此次活動的投影片已公佈於 http://www.hadoop.tw，歡迎前往下載。

Hadoop Taiwan User Group
http://www.hadoop.tw

雲端運算於海洋資訊之前瞻應用研習暨
第一屆台灣 Hadoop 使用者社群會議

Cloud Computing for Advanced Ocean Research

Hadoop Taiwan User Group Meeting 2009

- 會議時間: 九十八年十一月十日（週二）
- 會議地點: 國家高速網路與計算中心　國際會議廳

活動開始時間
2009/11/10 09:00

活動結束時間
2009/11/10 17:00

地點名稱
國家高速網路與計算中心（新竹市研發六路七號）

活動人數上限
150

Like 13 people like this. Be the first of your friends.

Keynote by Christophe Bisciglia

http://registrano.com/events/hadoop-tw

2008/01/28
2008/04/12
2008/04/28
2008/08/16
2008/11/04
2009/04/01
2009/04/13
2009/11/10
2009/11/19

2010/1/28 Connected with Andrew Purtell

Andrew Purtell
Apache HBase
Trend Micro (2010)
Intel (Now)

2008/01/28
2008/04/12
2008/04/28
2008/08/16
2008/11/04
2009/04/01
2009/04/13
2009/11/10
2009/11/19
2010/01/28
2010/04/26

2010/01/28 Connected with Andrew Purtell
2010/04/26 Apache HBase Talk

「雲端運算與應用」系列演講(五)

雲端分散式資料庫 Apache HBase

"Cloud Computing and its Application" lecture series:

Apache HBase

- 會議時間：九十九年四月二十六日（週一）下午一點三十分
- 會議地點：國家高速網路與計算中心中部事業群 3D 劇場
- （40763 台中市中部科學工業園區科園路22號）
- 視訊地點：國家高速網路與計算中心新竹事業群國際會議廳
- 國家高速網路與計算中心南部事業群國際會議廳
- 主辦單位：國家高速網路與計算中心
- 報名網址：http://registrano.com/events/cloudtalk20100426
- 轉播網址：http://cloud.nchc.org.tw
- 聯絡電話：王耀聰 (04)2462-0202 # 834

資料庫應用對於資訊產業已是不容或缺的一環，但隨著資料巨幅地成長，傳統關聯式資料庫將面臨無法持續擴充的效能瓶頸。知名雲端服務提供者谷歌（Google）針對大量資料的儲存、分析與查詢，分別提出 Google File System 分散式檔案系統、MapReduce 演算法與 Big Table 分散式資料庫。Apache 基金會的 Hadoop 專案實作了前兩者，而 HBase 則基於 Hadoop，提供分散式資料庫的解決方案。此次演講很榮幸邀請到現任趨勢科技資深軟體架構師，也是 HBase 專案關鍵貢獻者(Commitor)的 Andrew Purtell 來為大家介紹 Apache HBase 專案的近期發展，歡迎對於雲端分散式資料庫系統感興趣的同好踴躍參加。

地點名稱
國家高速網路與計算中心
台中市科學園區科園路22號

活動人數上限
150

主辦單位
國家高速網路與計算中心

Tweet 0
Like Be the first of your friends to like this.

Google Calendar
加至 Outlook 行事曆

http://registrano.com/events/cloudtalk20100426

2010/4/12 Connected with Alex Loddengaard

Alex Loddengaard
Cloudera (2010)
Co-Founder of MemCachier (Now)

2010/03/10 Cloudera Certification @ NYC
2010/04/12 Cloudera Training in Taiwan

0917527812396732001

Event	Hadoop Training for Developers - NYC - March
Date+Time	**Wednesday, March 10, 2010** at 9:00 AM - **Friday, March 12, 2010** at 5:00 PM (ET)
Type	**3 Days: Early Bird: Full Program + Certification** $0.00
Location	**Learning Tree - NYC** One New York Plaza 31st Floor New York, NY 10004
Order Info	Ordered by **Yao-Tsung Wang** on **Feb 07, 2010** at 8:52 AM

cloudera

Name
Yao-Tsung Wang

Payment Status
Free Order

Eventbrite Create an event Find events Email Share Tweet Like 2 Questions? Contact the organizer

Hadoop Training for Developers - Taipei - April

Cloudera, Inc
Monday, April 12, 2010 at 9:00 AM - Wednesday, April 14, 2010 at 5:00 PM (CST)
Taipei, Taiwan

cloudera

Ticket Information

TICKET TYPE	SALES END	PRICE	FEE	QUANTITY
Early Bird: Full Program (3 Days) + Certification - Regular / Invoice Price: 59.000 TWD	Ended	$888.00	$0.00	N/A
Full Program (3 Days) + Certification - Regular / Invoice Price: 64.000 TWD	Ended	$998.00	$0.00	N/A

When & Where

台北市大安區金山南路2段52號1F

Taipei, T'ai Pei
Taiwan
Monday, April 12, 2010 at 9:00 AM -
Wednesday, April 14, 2010 at 5:00 PM (CST)

Add to my calendar

2008/01/28 2008/04/12 2008/04/28 2008/08/16 2008/11/04 2009/04/01 2009/04/13 2009/11/10 2009/11/19 2010/01/28 2010/04/26

2010/12/02 第二屆台灣 Hadoop 使用者社群會議

2010/10/20 hadoop.nchc.org.tw upgrade
2010/12/02 2nd Taiwan Hadoop User Group

2010 第二屆台灣 Hadoop 使用者社群會議

<< 「雲端運算與應用」系列演講(五) | 第三屆台灣 Hadoop 使用者社群會議 >>

部分願意公開投影片與錄影的內容，請至 cloud.nchc.org.tw 下載。

Hadoop Taiwan User Group
http://www.hadoop.tw

第二屆台灣 Hadoop 使用者社群會議
Hadoop Taiwan User Group Meeting 2010

- 會議時間：九十九年十二月二日（週四）
- 會議地點：國家高速網路與計算中心 立體劇場
  （台中市科園路 22 號 - 詳細交通指引）
- 主辦單位：國家高速網路與計算中心

活動開始時間
2010/12/02 09:00

活動結束時間
2010/12/02 17:00

地點名稱
國家高速網路與計算中心
台中市科園路 22 號

活動人數上限
180

主辦單位
國家高速網路與計算中心

Tweet 1
Like 7 people like this. Be the first of your friends.

http://registrano.com/events/hadoop-tw-2010

2008/01/28 2008/04/12 2008/04/28 2008/08/16 2008/11/04 2009/04/01 2009/04/13 2009/11/10 2009/11/19 2010/01/28 2010/04/26 2010/12/02

2011/12/05 第三屆台灣 Hadoop 使用者社群會議

全球景氣不佳，
很難邀國際講者

曾嘗試邀請
KarmaSphere
HortonWorks

最後要感謝：

中華電信
EMC Greenplum
Armorize
Trend Micro

2008/01/28
2008/04/12
2008/04/28
2008/08/16
2008/11/04
2009/04/01
2009/04/13
2009/11/10
2009/11/19
2010/01/28
2010/04/26
2010/12/02
2011/12/05

2011/12/05 3rd Taiwan Hadoop User Group

2011 第三屆台灣 Hadoop 使用者社群會議

<< 第二屆台灣 Hadoop 使用者社群會議 | >>

部分願意公開的投影片內容，請至 cloud.nchc.org.tw 下載。



Hadoop Taiwan
User Group
http://www.hadoop.tw

第三屆台灣 Hadoop 使用者社群會議
Hadoop Taiwan User Group Meeting 2011

- 會議時間：民國一百年十二月五日（週一）
- 會議地點：中華電信訓練所板橋本所綜合大樓七樓會議室
  （板橋市民族路 168 號 - 詳細 交通指引）
- 主辦單位：國家高速網路與計算中心
- 協辦單位：中華電信訓練所、EMC Greenplum
- 贊助單位：CIO IT 經理人雜誌、iThome 電腦報週刊

活動開始時間
2011/11/09 09:00

活動結束時間
2011/12/04 17:00

地點名稱
中華電信訓練所
板橋市民族路168號

活動人數上限
180

主辦單位
國家高速網路與計算中心

Tweet 13
Like NealLee, Chao-Tung Yang and 57 others like this.

Google Calendar

http://registrano.com/events/hadoop-tw-2011

2012/10/02 與趨勢合辦 Hadoop in Taiwan 2012

TREND MICRO 趨勢科技 [全程護航 邁向雲端]

台灣雲端運算產業協會 Cloud Computing Association in Taiwan

IDM 採智科技股份有限公司 Intelligent Data Miner Inc.

etu nexus enlightenment

TCloud Computing

2003及2004年，Google將分散式檔案系統、高度平行運算軟體編程平台等秘訣公諸於世

2006年，Doug Cutting 將上述秘訣寫成開源系統 Hadoop 專案

2008年，Yahoo 宣佈建立了全球最大的商業營運 Hadoop 叢集

2009年，台灣Hadoop使用者社群會議首度開辦

2011年，阿帕契基金會正式釋出 Hadoop 1.0 版本，象徵 Hadoop 已經穩定到足以承載企業營運的需求

2012年，台灣Hadoop使用者大會正式登場，宣告Hadoop風潮即將襲捲台灣

國網中心和趨勢科技共同主辦的「Hadoop in Taiwan 2012」，是Hadoop在台灣首次的大型會議，精心規劃的議程內容涵蓋前瞻技術和實作應用，從個人到企業、從資深人士到新進者，各種角色的技術專才都能從

活動資訊

日期：2012 / 10 / 02(二)

時間：08:30~17:00 (08:30 開始報到)

地點：中央研究院 人文社會科學館4F國際會議廳
(台北市南港區研究院路二段128號)

活動諮詢：02-2782-5255#14 周小姐

立即報名

2008/01/28
2008/04/12
2008/04/28
2008/08/16
2008/11/04
2009/04/01
2009/04/13
2009/11/10
2009/11/19
2010/01/28
2010/04/26
2010/12/02
2011/12/05
2012/10/02

2012/10/02 Hadoop in Taiwan 2012

http://www.hadoopintaiwan.com/

演講大綱 Agena

- 過去 **PAST**
  - NCHC Cloud Research Group (2008.1~Now)
  - Taiwan Hadoop User Group (2008.4~Now)
  - Hadoop in Taiwan (2012.10~Now)
- 現在 **NOW**
  - 巨量資料的奇幻漂流 **Life of Big Data**
  - 相關社群的群聚分析 **SNA of Communities**
- 未來 **FUTURE**
  - 從產業供應鏈的觀點 **Supply Chain of Big Data**
  - 從社群談未來的展望 **Actions driven from SNA**

Happy Birthday to Hadoop.TW

2013/4/28 – 5 Years Old !

Happy Birthday to Hadoop.TW

Source: http://postacademic.files.wordpress.com/2011/02/800px-birthday_candles.jpg

5 Years，10000 Hours = Domain Expert

本文出自天下雜誌最新出版《像三星一樣工作》，更多內容>>

在正式進入學習三星的業務能力之前，必須先仔細思考：「為什麼五年職場生活如此重要？」「因為是剛開始的五年，當然重要吧？」這種毫無頭緒的想法固然沒錯，不過所謂的五年，早已超越了「單純時間的累積」，而具有更特別的意義。

尤其將這「五年的意義」銘記在心，將可展望自己未來另一個五年，甚至十年，與未來的樣貌重疊，藉此將有助於強化穩定性與目標意識。

達到「一萬小時法則」的時間，五年

要成為真正的專家，有所謂「一萬小時的法則」之說。一天三小時，持續練習十年的話，將會在該領域達到「通達」的境界，並以其專業能力受到他人的認同。但是如果將這時間從一天的三小時增加到六小時，那麼達到「一萬小時的法則」正好是五年。

每天在職場上的時間，大約是九小時左右。不過扣除午餐時間與休息、閒聊、準備會議、接待客戶、事後業務整理等非主要業務的時間，可以完全投入在業務上的時間，約在六到七小時左右。這六到七小時的時間，便是可以成為「專家」的一萬小時。

Source : http://www.cw.com.tw/article/article.action?id=5047693&page=1

巨量資料的奇幻漂流 Life of Big Data

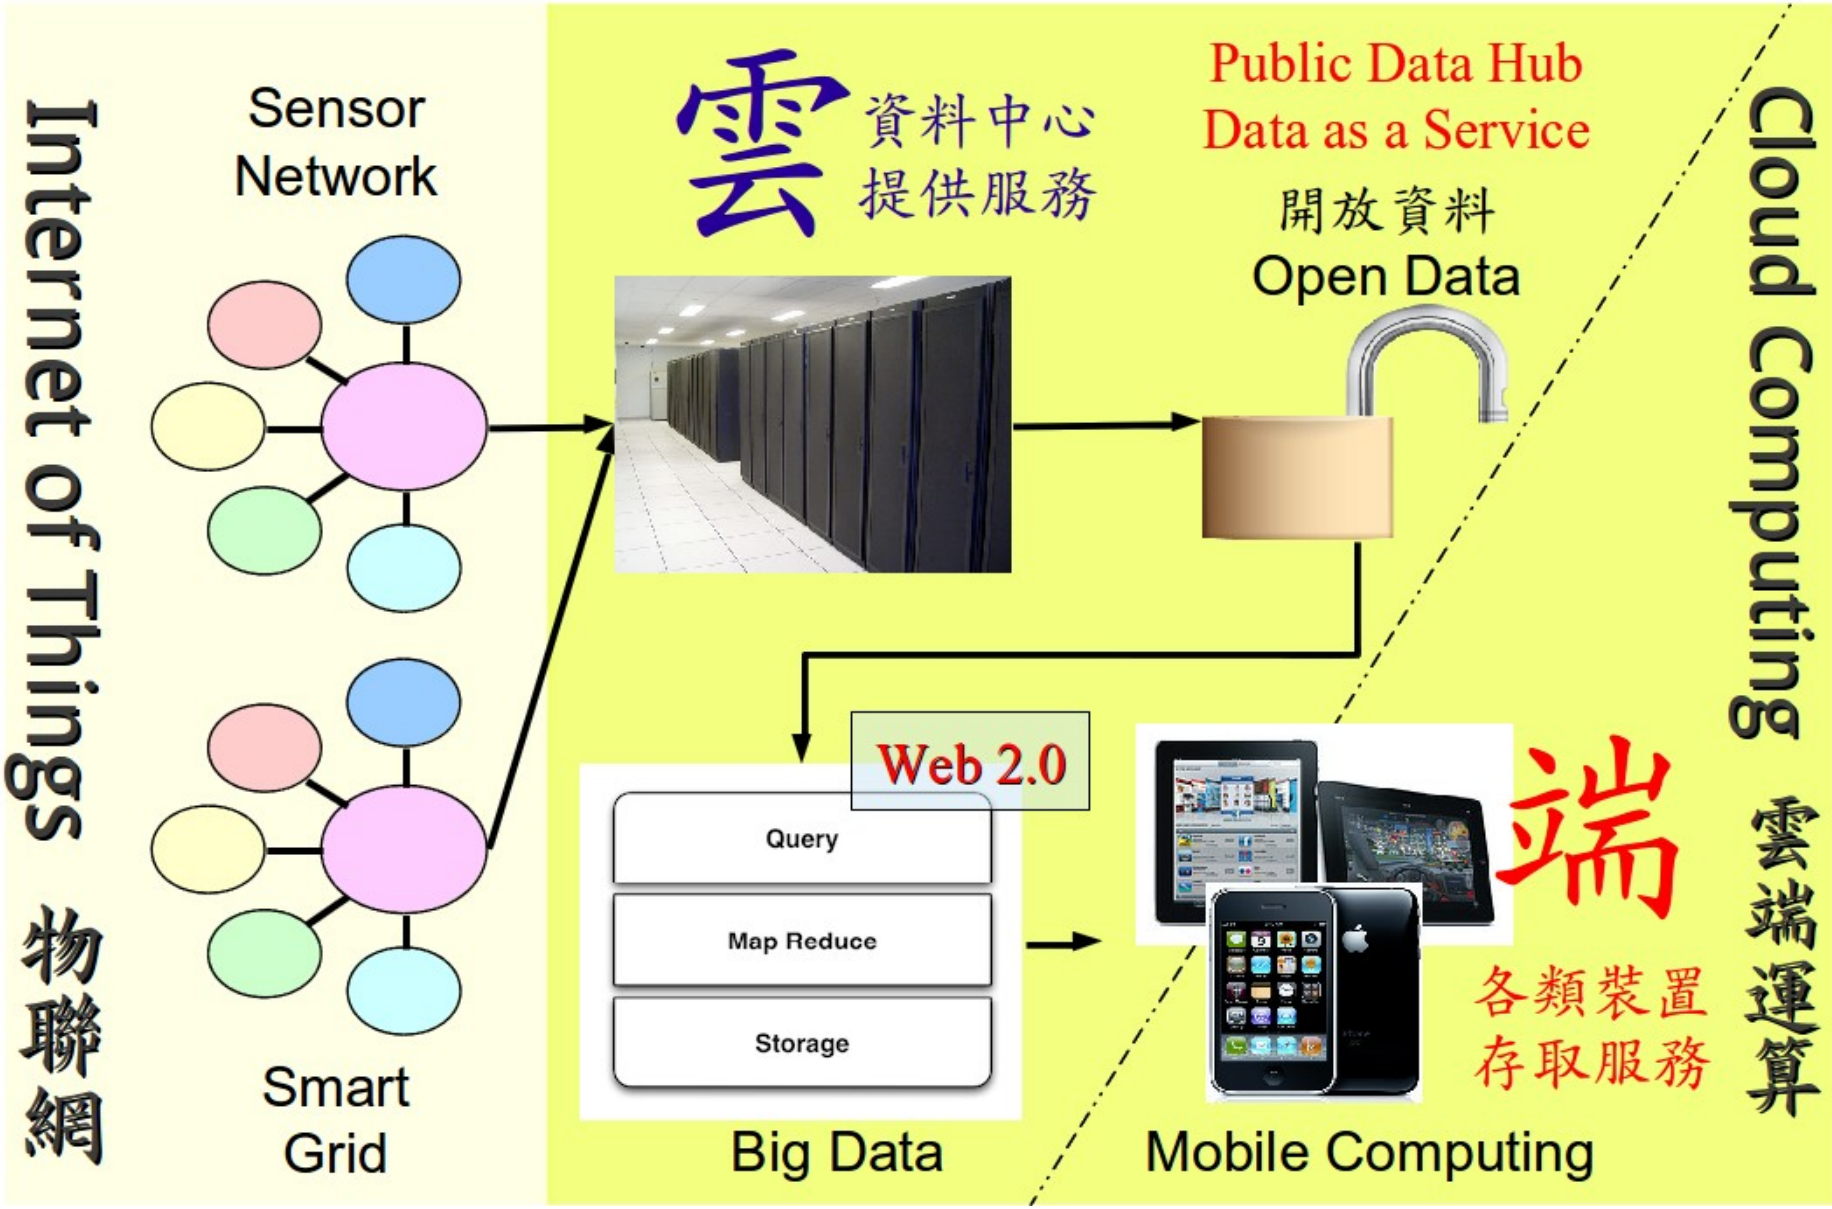

Community Evangelist

Connecting People

Connecting Values

< Mission >

Connecting People to build a Value Supply Chain

相關社群的群聚分析 SNA of Communities

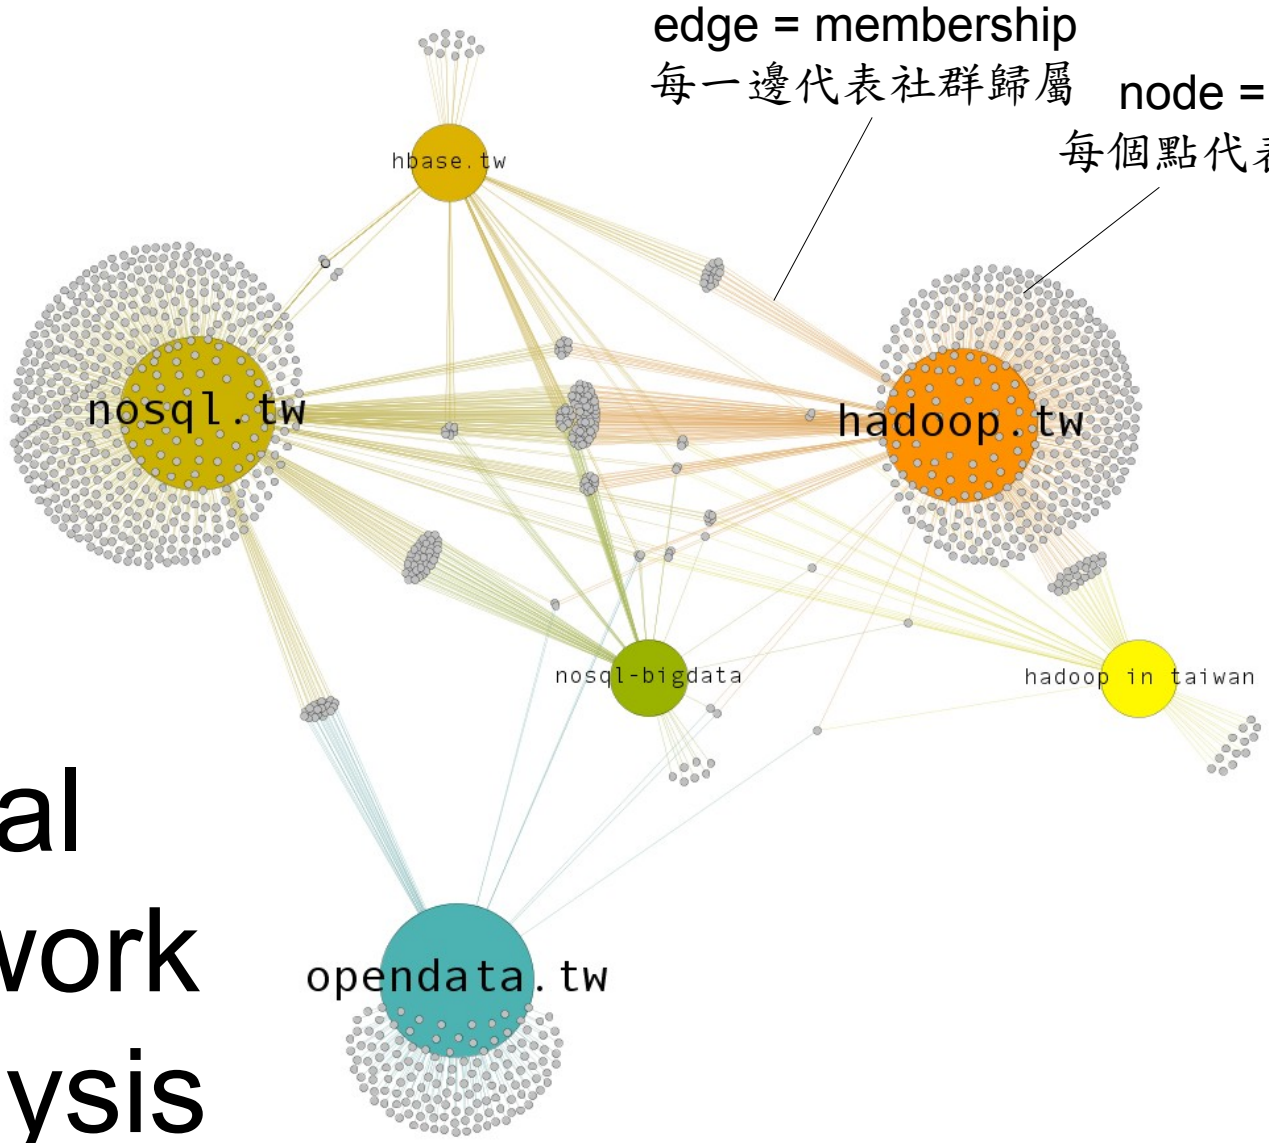

Social
Network
Analysis

演講大綱 Agena

- 過去 **PAST**
  - NCHC Cloud Research Group (2008.1~Now)
  - Taiwan Hadoop User Group (2008.4~Now)
  - Hadoop in Taiwan (2012.10~Now)
- 現在 **NOW**
  - 巨量資料的奇幻漂流 Life of Big Data
  - 相關社群的群聚分析 SNA of Communities
- 未來 **FUTURE**
  - 從產業供應鏈的觀點 **Supply Chain of Big Data**
  - 從社群談未來的展望 **Actions driven from SNA**

Supply Chain of Cloud Computing

應用軟體
供應商

端

各類裝置
存取服務

行動裝置
共通平台

htc
quietly brilliant

軟體服務
供應商

Google

amazon
web services™

大象擺這裡

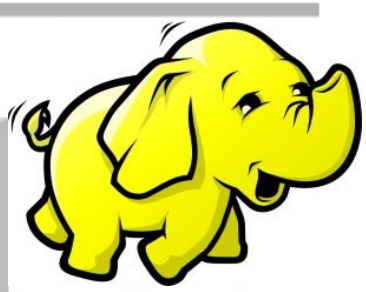

資料中心
機房維運

acer

資料中心
提供服務

基本硬體
建設組件

FOXCONN
鴻海科技集團

英業達集團
Inventec

廣達電腦
Quanta Computer

巨量資料的社群關聯 Relations between Communities

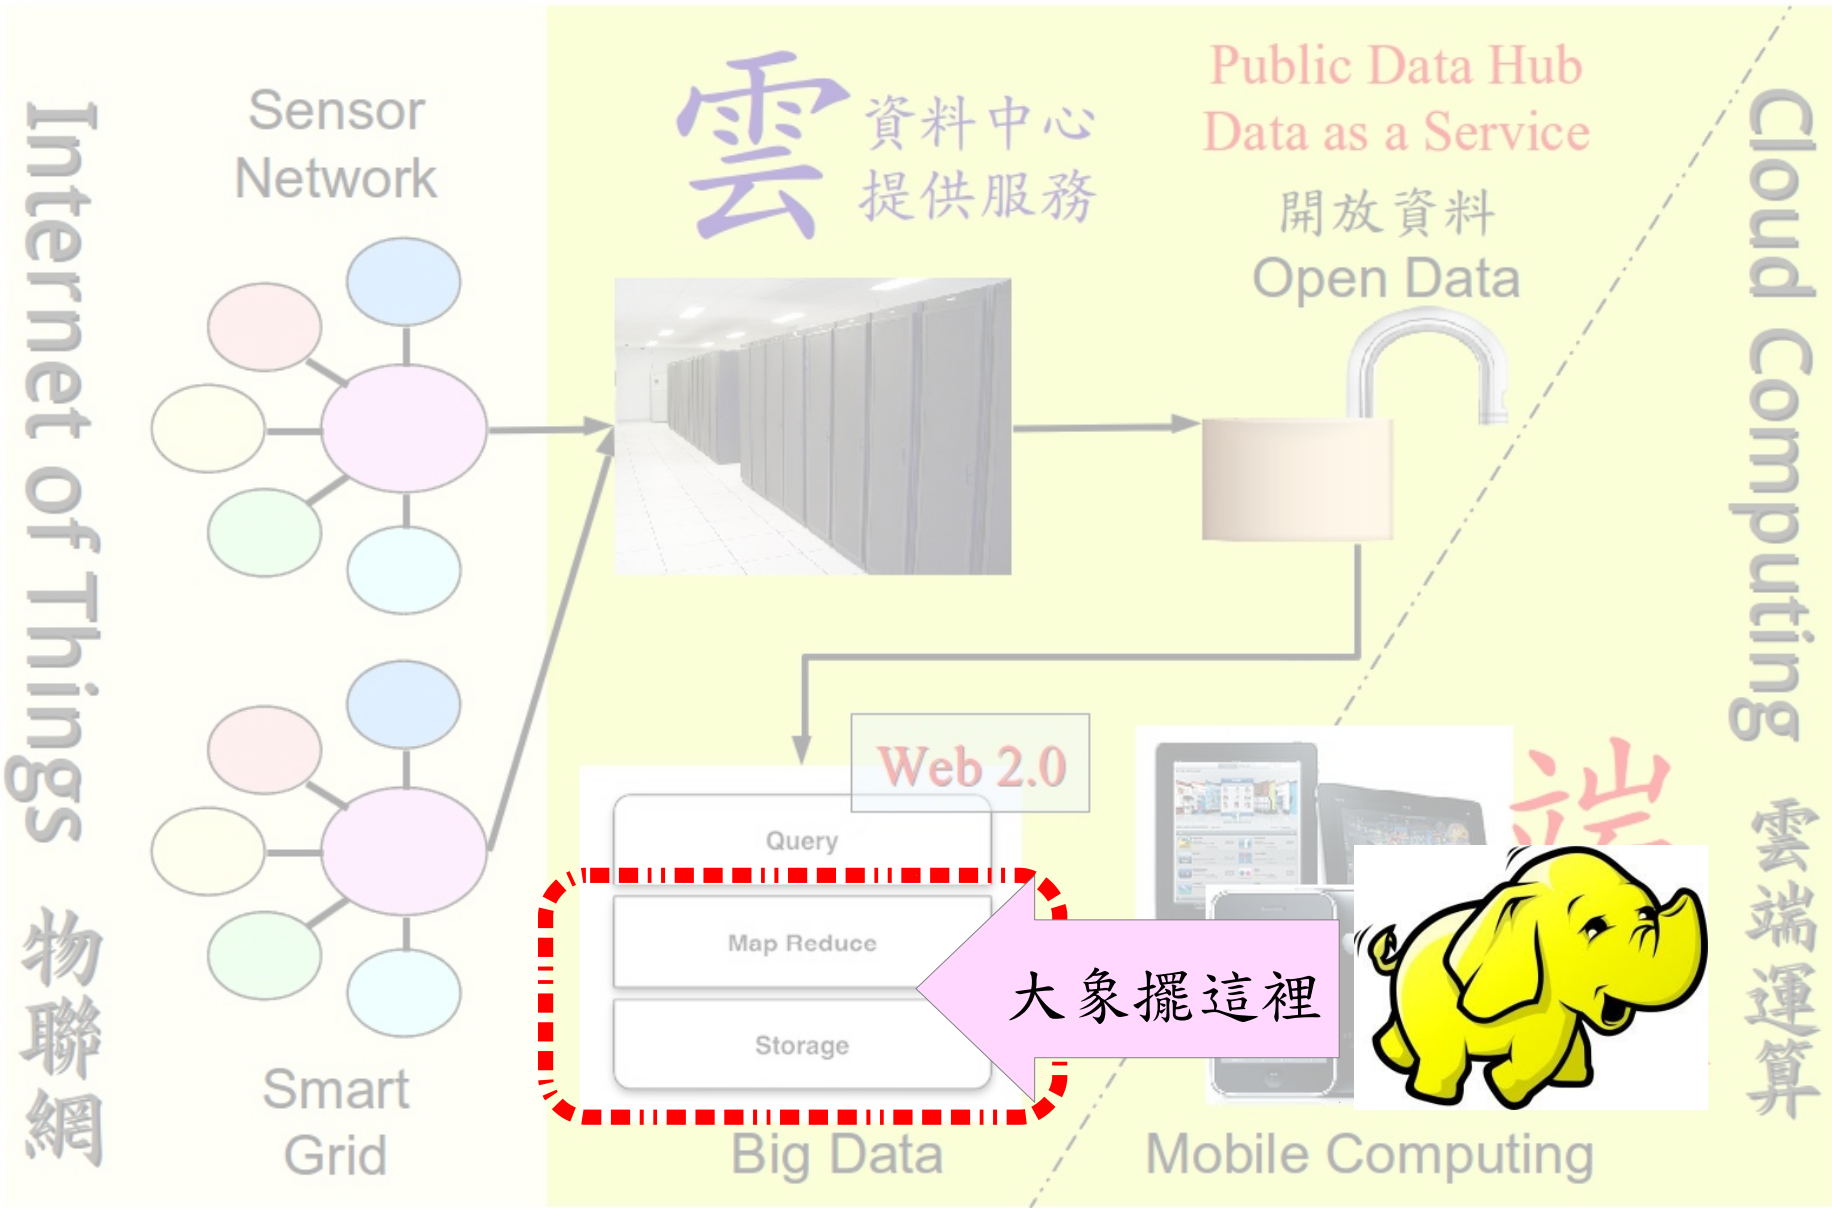

Hadoop related Facebook Group in Taiwan

Hadoop.TW

https://www.facebook.com/groups/hadoop.tw

2013/03/22 Hadoop.TW 533 members

Hadoop related Facebook Group in Taiwan

Hadoop in Taiwan

https://www.facebook.com/groups/hadoopintaiwan/

2013/03/22 Hadoop in Taiwan 59 members

巨量資料的社群關聯 Relations between Communities

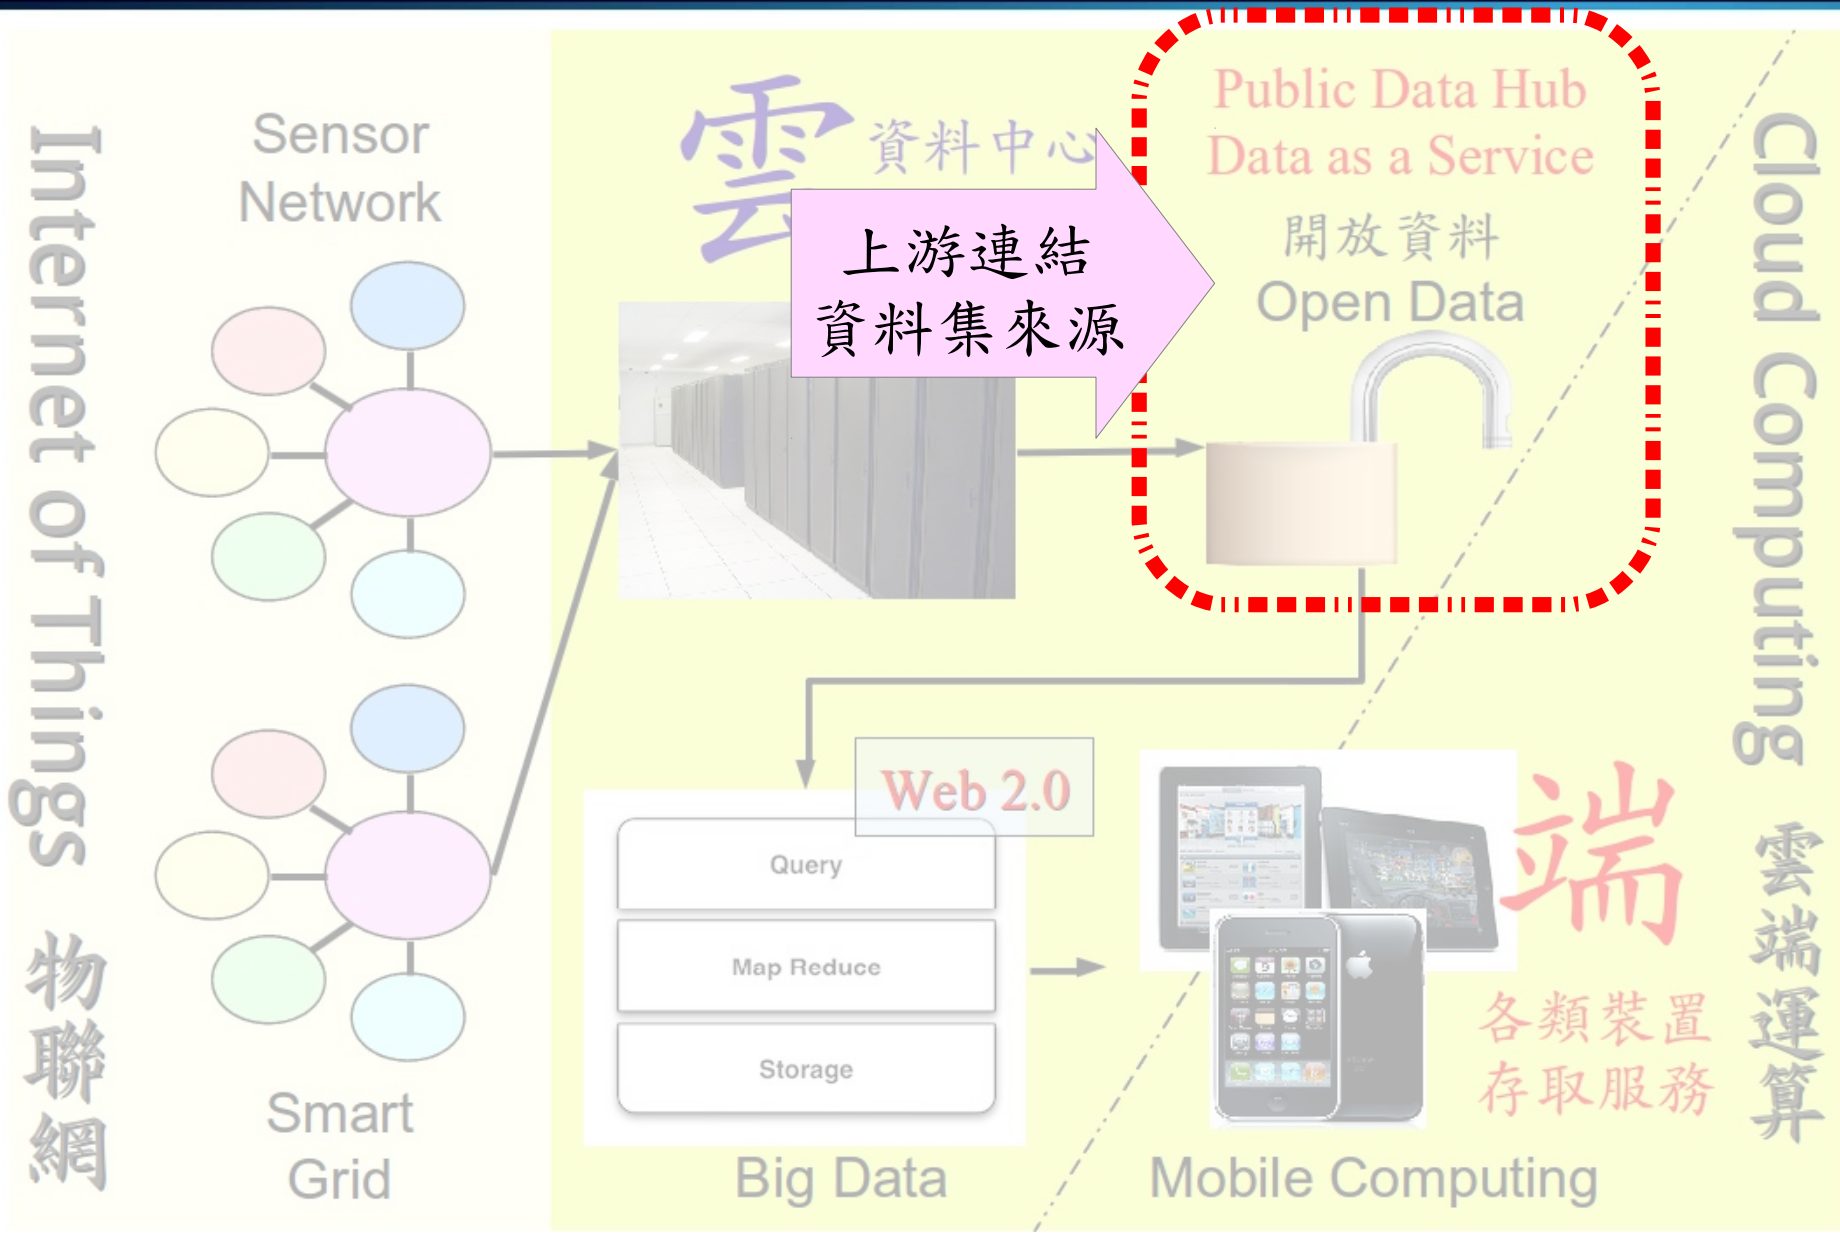

Open Data Taiwan Facebook Group

OpenData / Taiwan (ODTWN)

https://www.facebook.com/groups/odtwn/

2013/03/22 Open Data Taiwan 170 members

巨量資料的社群關聯 Relations between Communities

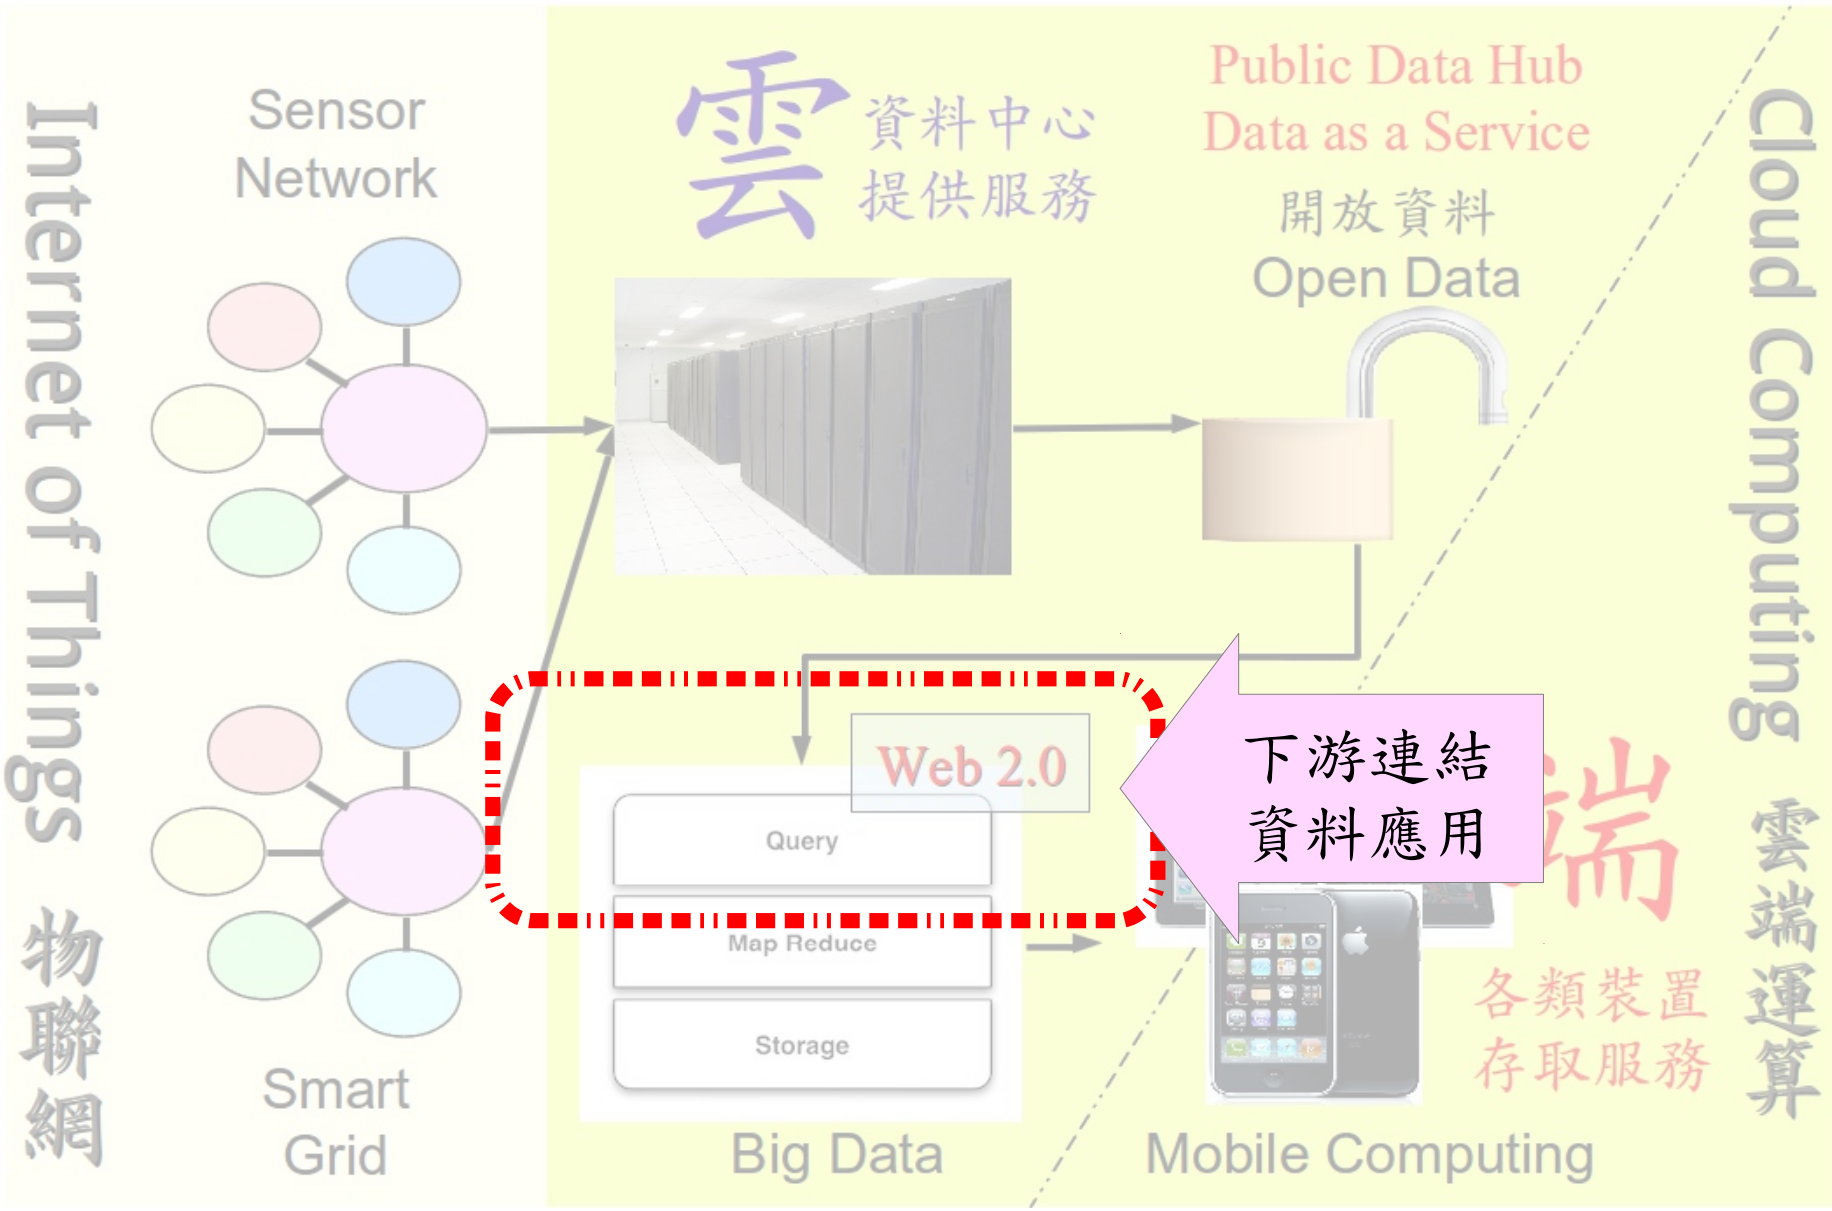

NoSQL Taiwan Facebook Group

NoSQL Taiwan
https://www.facebook.com/groups/306552142710977/

2013/03/22 NoSQL Taiwan 683 members

NoSQL & Big Data Architecture

NoSQL & BigData Architecture

https://www.facebook.com/groups/423848814337101/

2013/03/22 NoSQL-BigData 92 members

HBase Taiwan Facebook Group

HBase 小聚

https://www.facebook.com/groups/289369481132604/

2013/03/22 HBase.TW 89 members

MongoDB Taiwan Facebook Group

MongoDB 小聚

https://www.facebook.com/groups/1425532458674 11/

2013/03/22 MongoDB.TW 114 members

JavaScript Taiwan Facebook Group

JavaScript.TW
https://www.facebook.com/groups/javascript.tw/

2013/03/22 JavaScript.TW 2177 members

Supply Chain of Big Data Industry

Big Data Stack : SMAQ

- Mobile
- Web 2.0
- Query
- MapReduce
- Storage
- Open Data
- IoT

JavaScript.TW 2177 members

NoSQL Taiwan 683 members

Hadoop Taiwan 533 members

Open Data Taiwan 170 members

Social Network Analysis of Communities

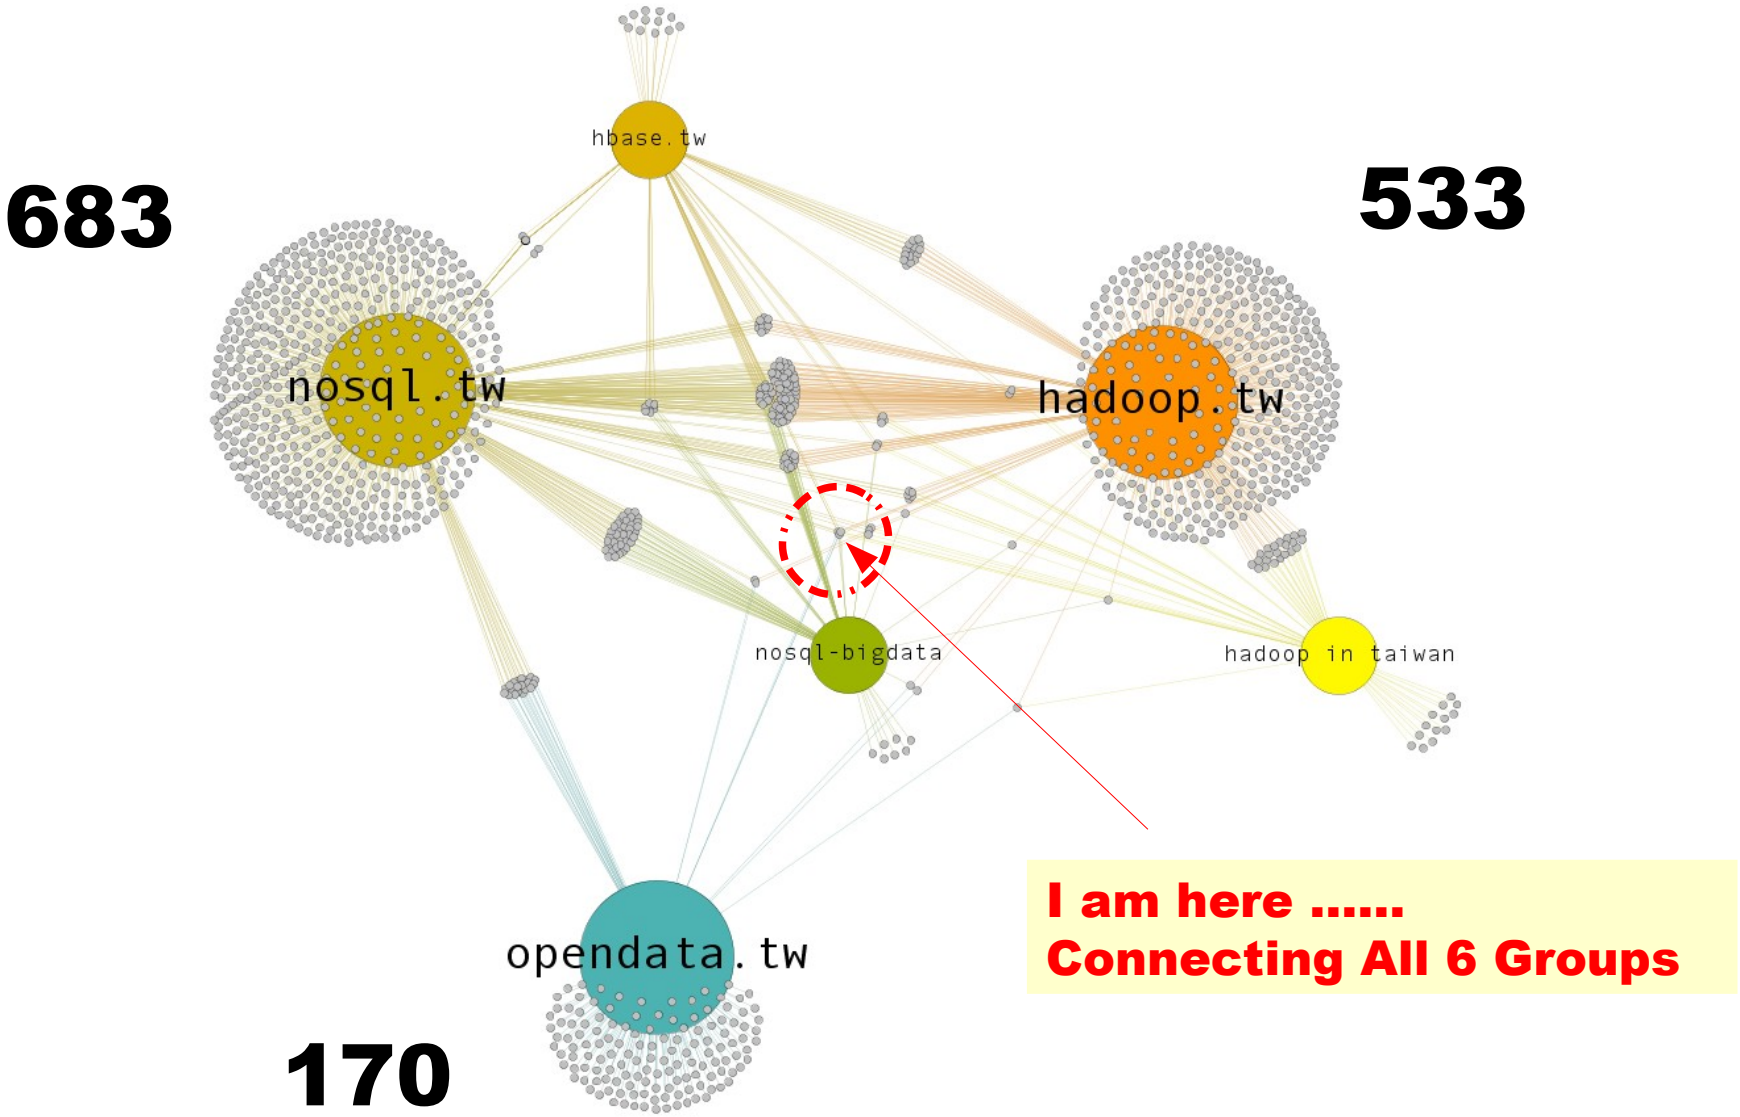

從社群談未來的展望 Actions driven from SNA

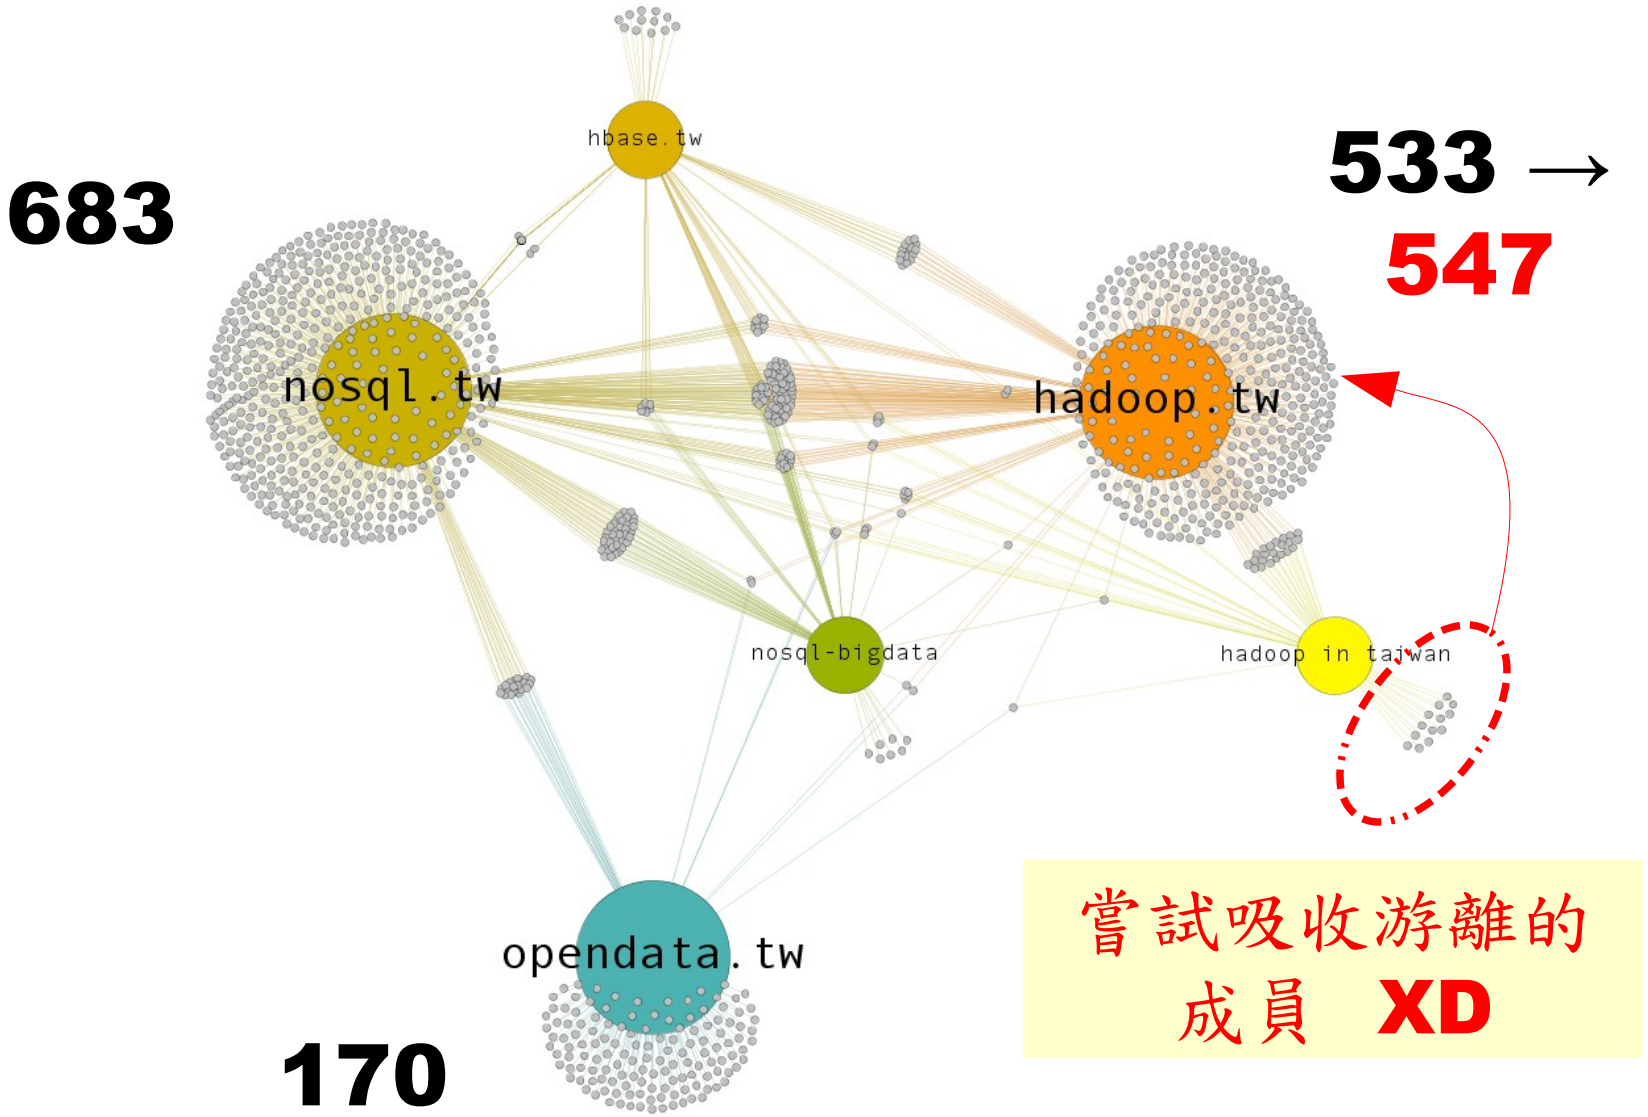

嘗試吸收游離的成員 XD

從社群談未來的展望 Actions driven from SNA

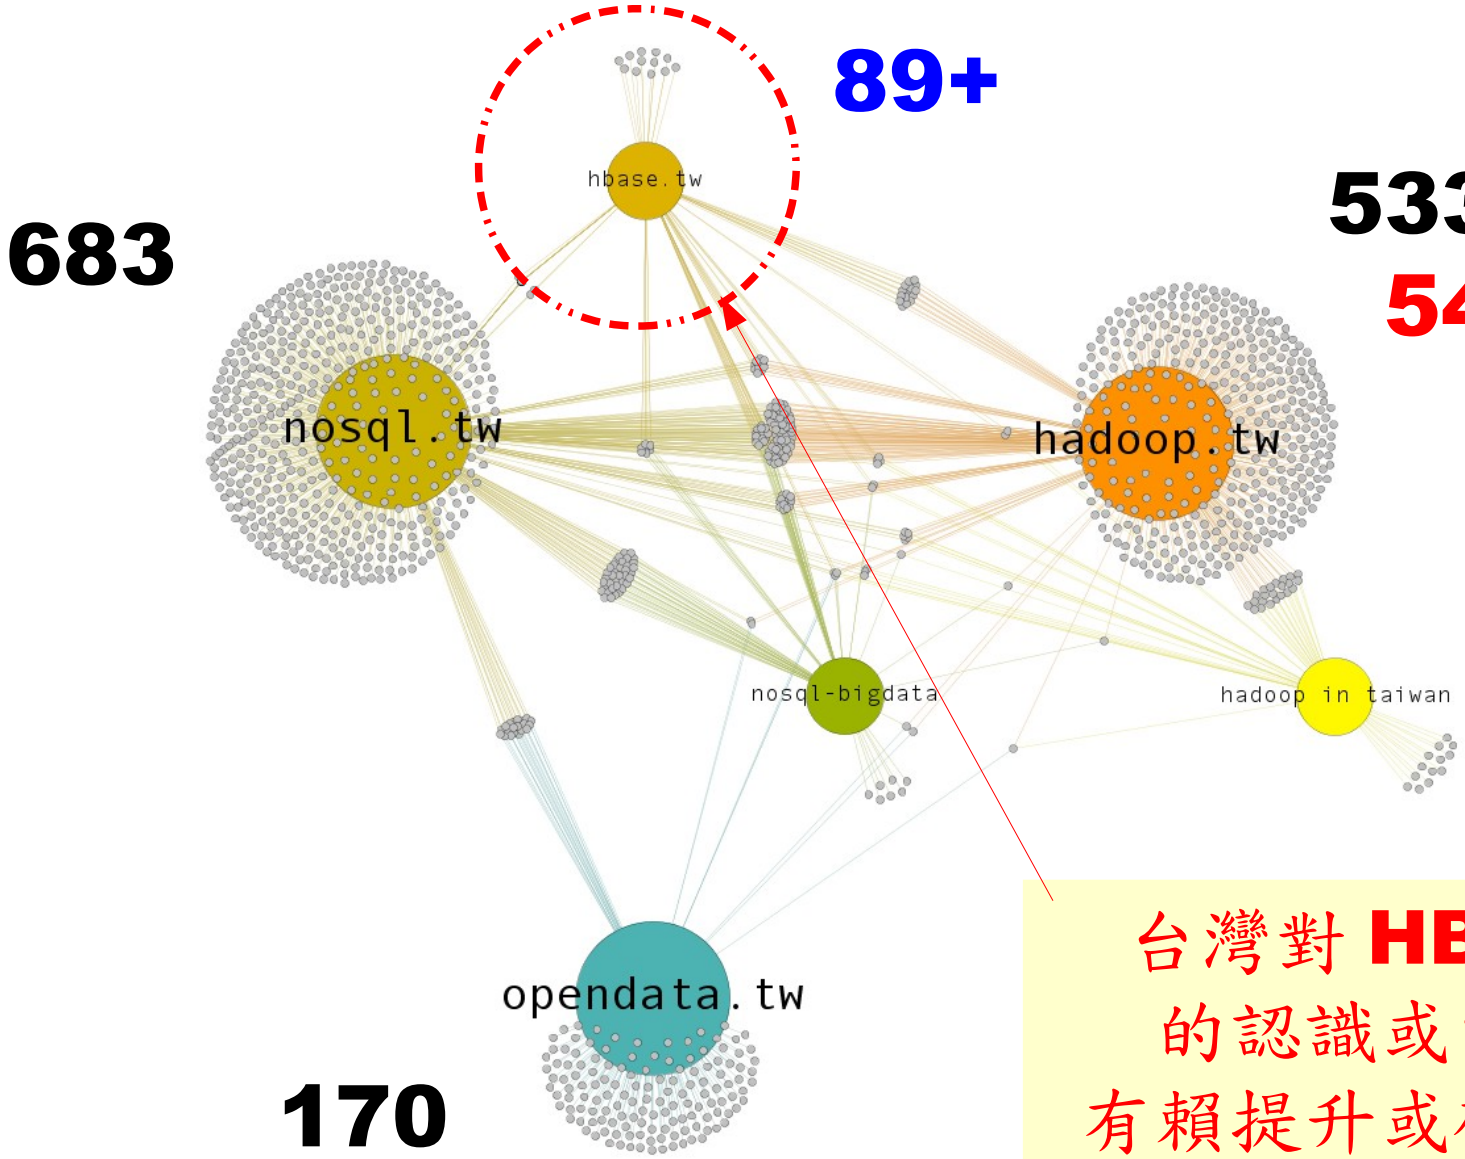

台灣對 **HBase**
的認識或需求
有賴提升或確認！

從社群談未來的展望 Actions driven from SNA

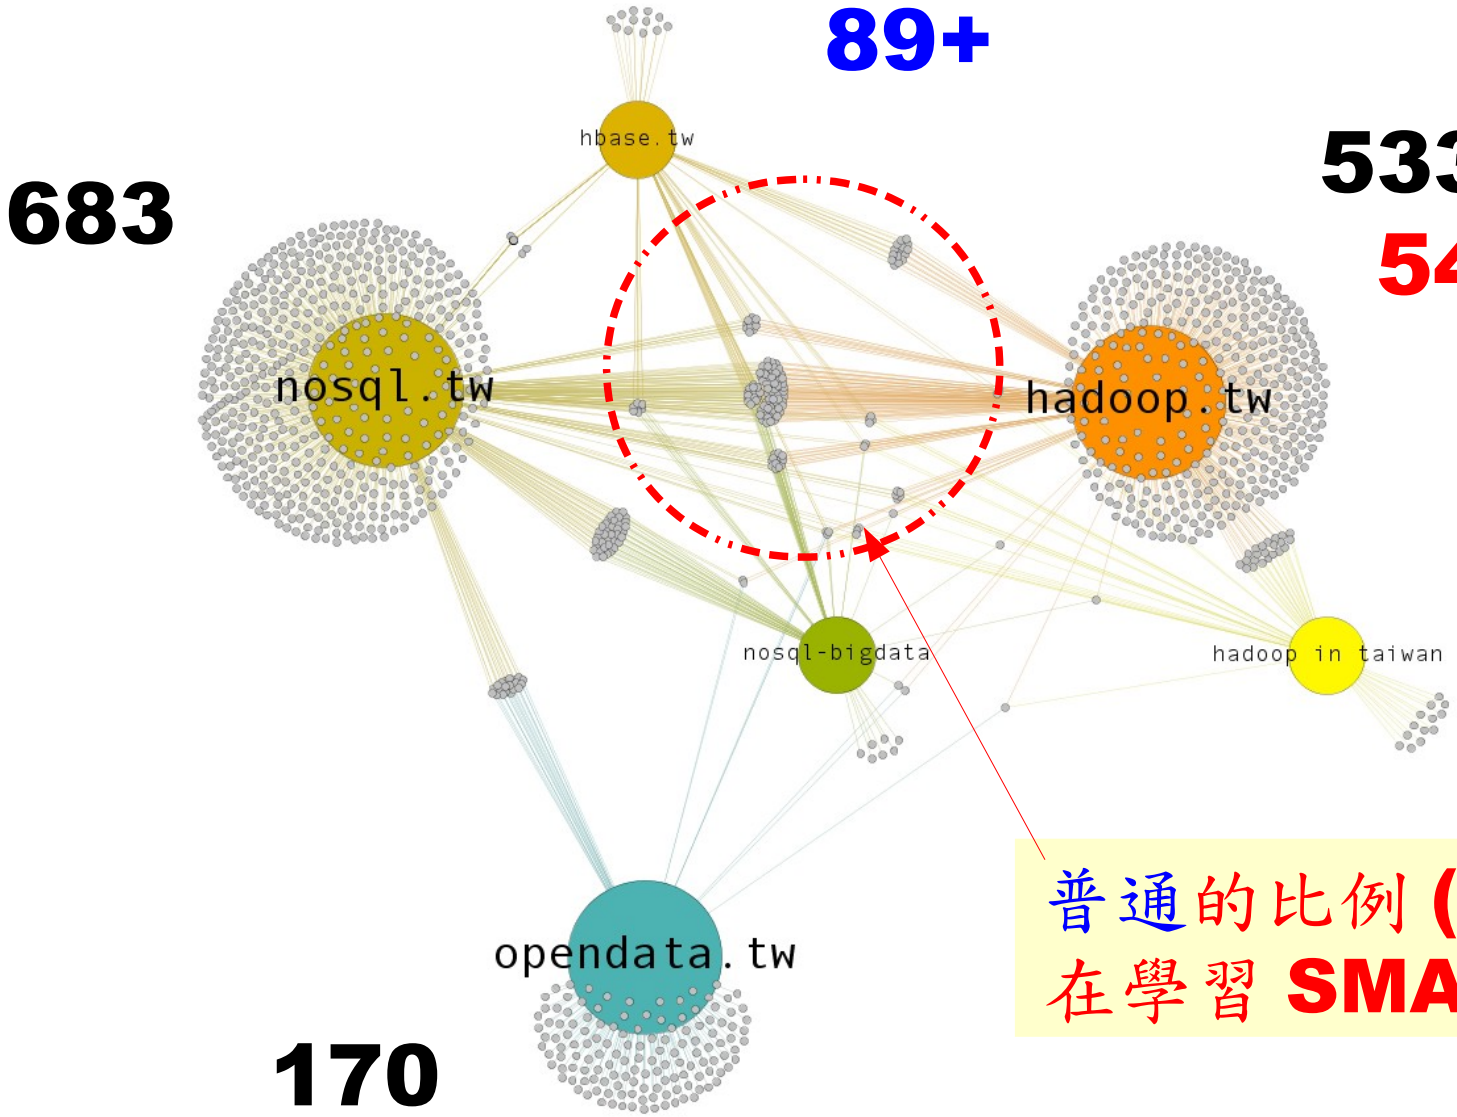

從社群談未來的展望 Actions driven from SNA

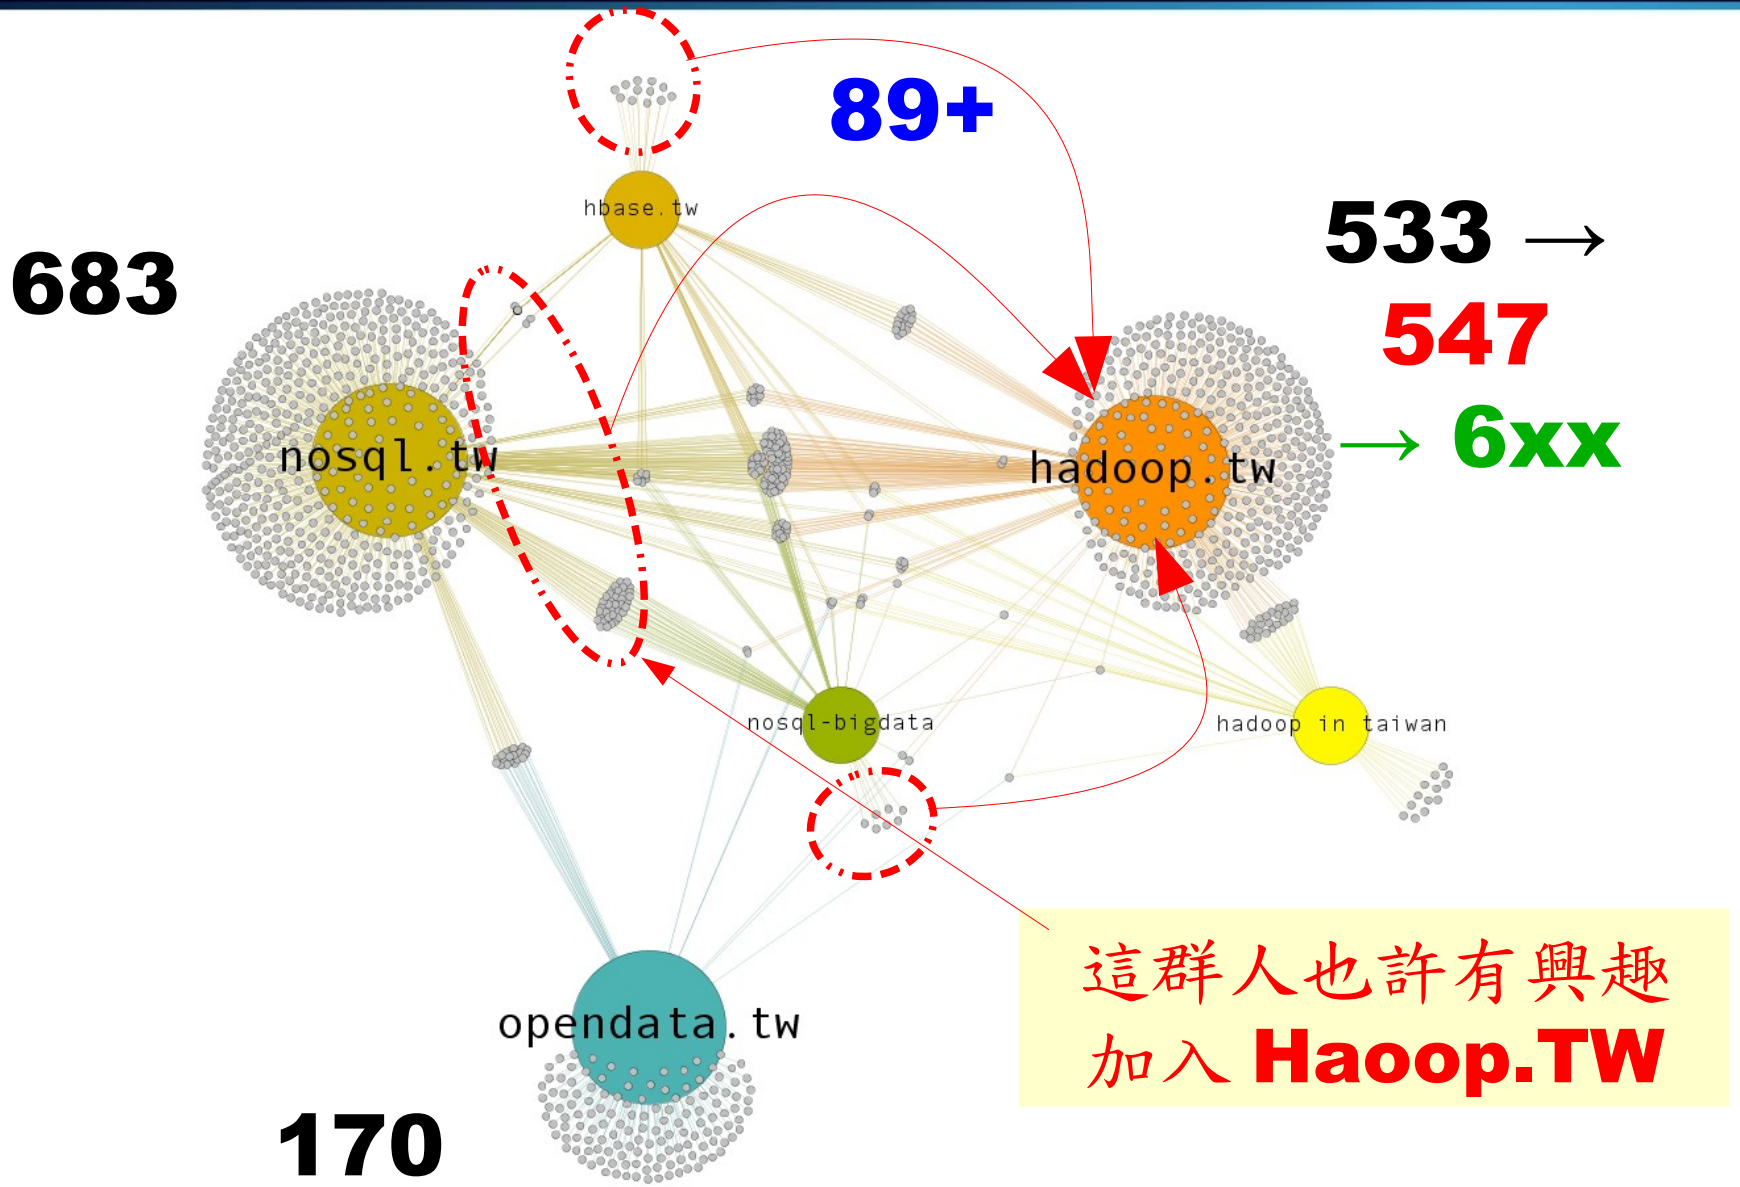

從社群談未來的展望 Actions driven from SNA

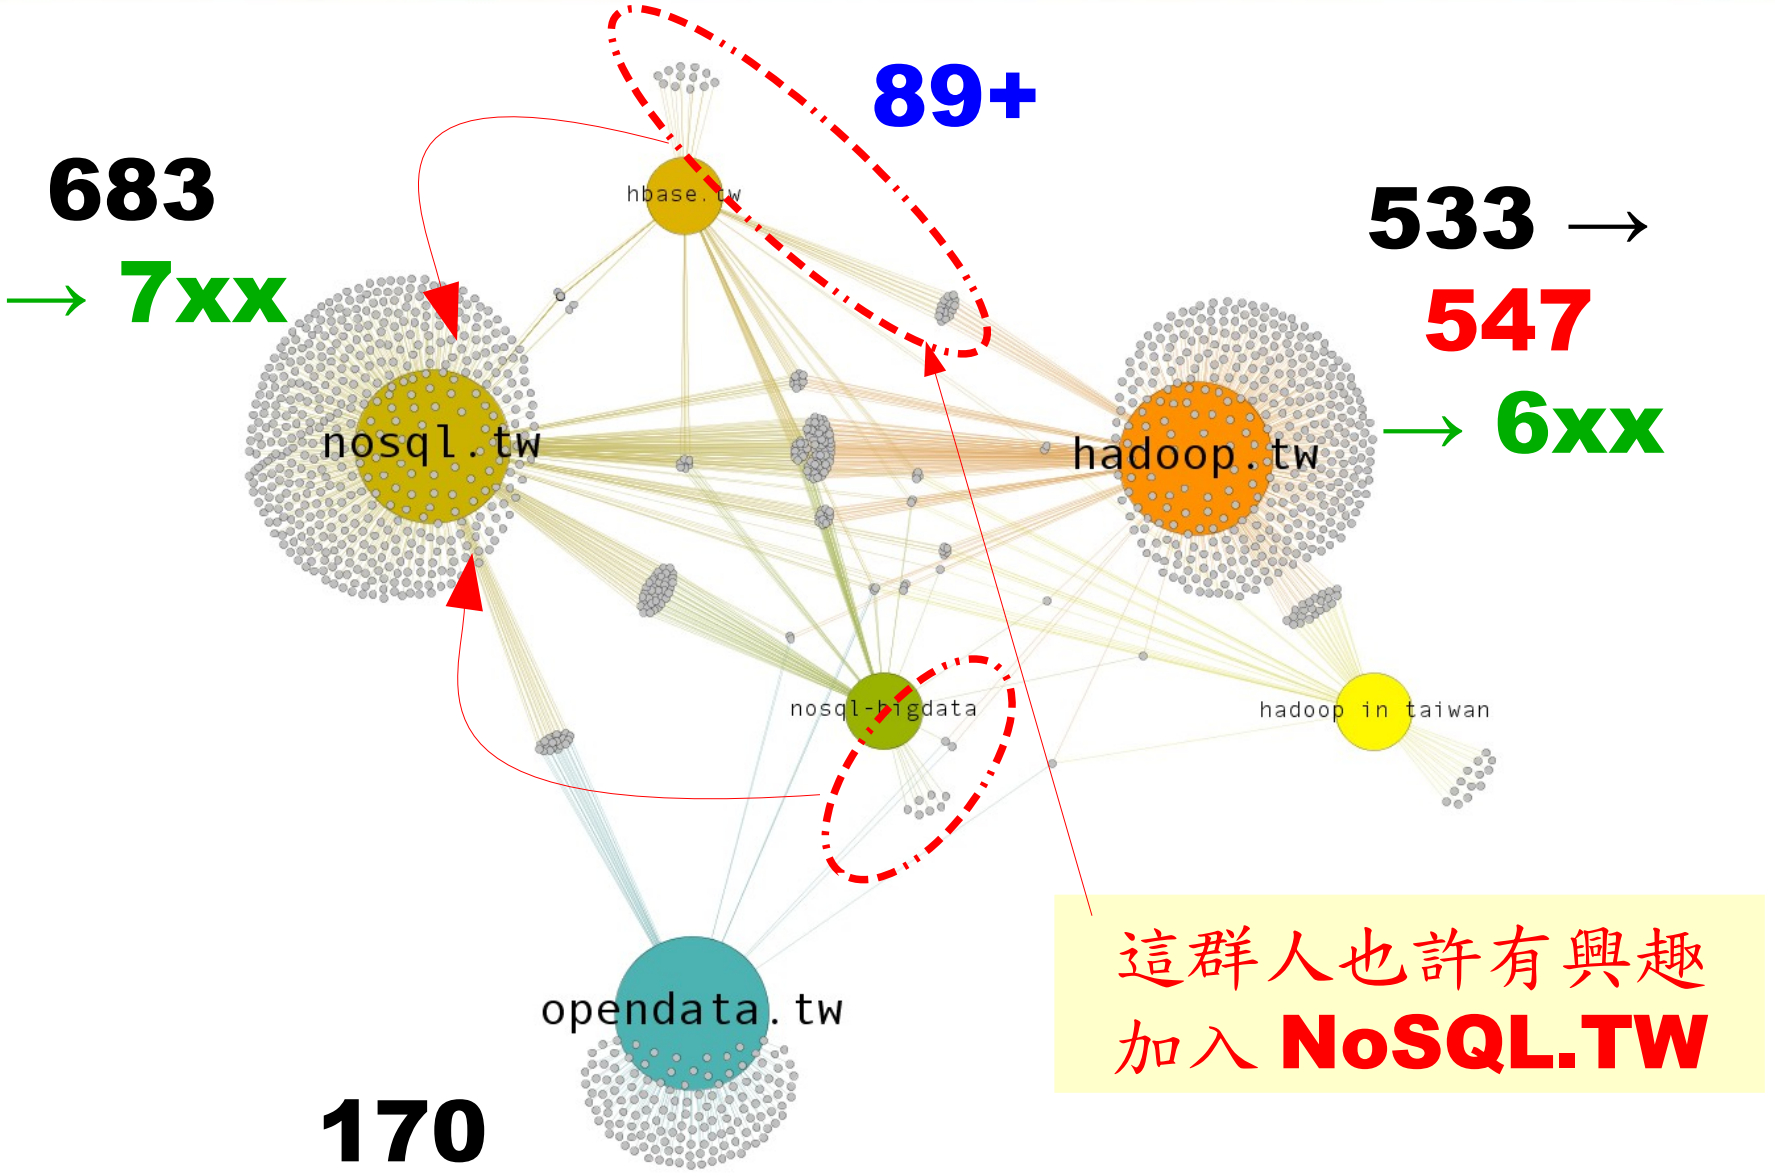

從社群談未來的展望 Actions driven from SNA

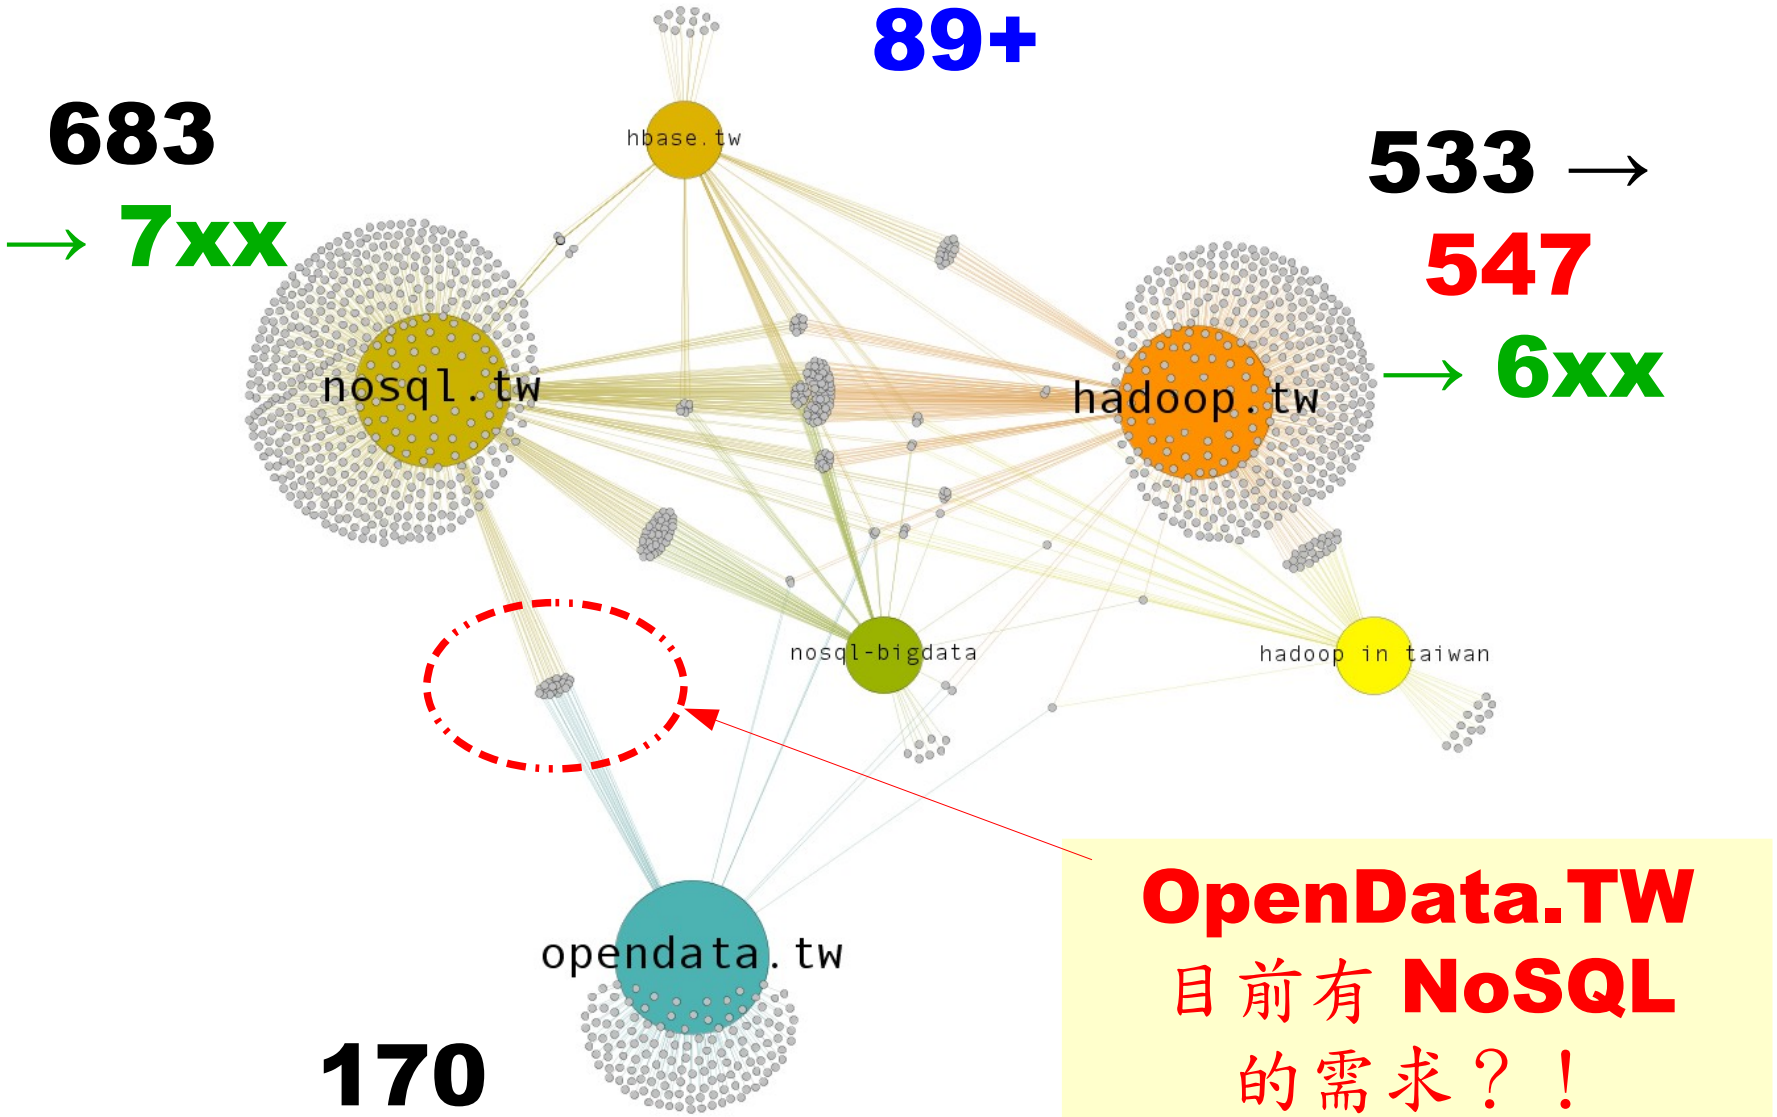

從社群談未來的展望 Actions driven from SNA

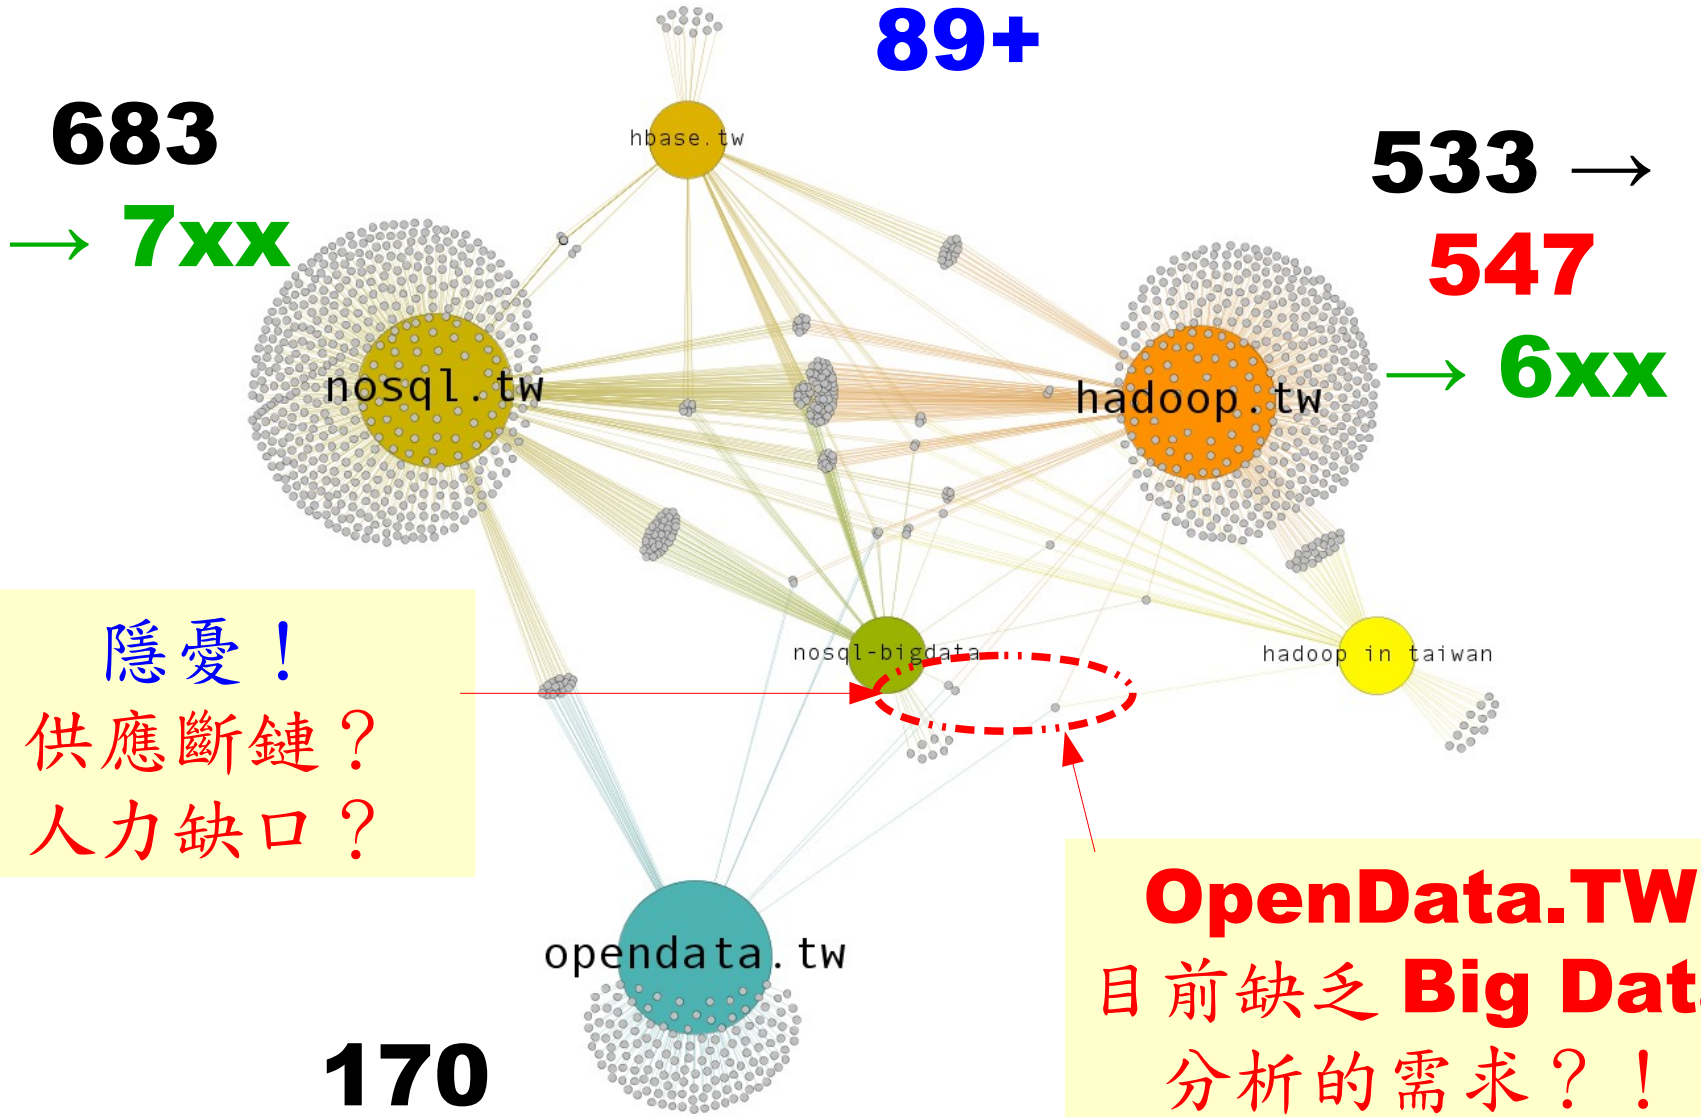

隱憂！
供應斷鏈？
人力缺口？

OpenData.TW
目前缺乏 **Big Data**
分析的需求？！

結　語 Conclusion

Mobile

Web 2.0

Query

MapReduce



Storage

Open Data

IoT

紅海

需求明確
市場飽和

JavaScript.TW 2177 members

缺乏成功案例

NoSQL Taiwan 683 members

還算健康
持續互動

Hadoop Taiwan 533 members

藍海

設法找出需求
強化供應鏈

Open Data Taiwan 170 members

有待法令開放

巨量資料產業尚未成型
仍有待打通產業供應鏈

Hadoop 社群如何找到需求？價值何在？

Knowledge is from the Past, Wisdom aim for Future

知識源自於過去，智慧在能預測未來

我們需要
更多情境！

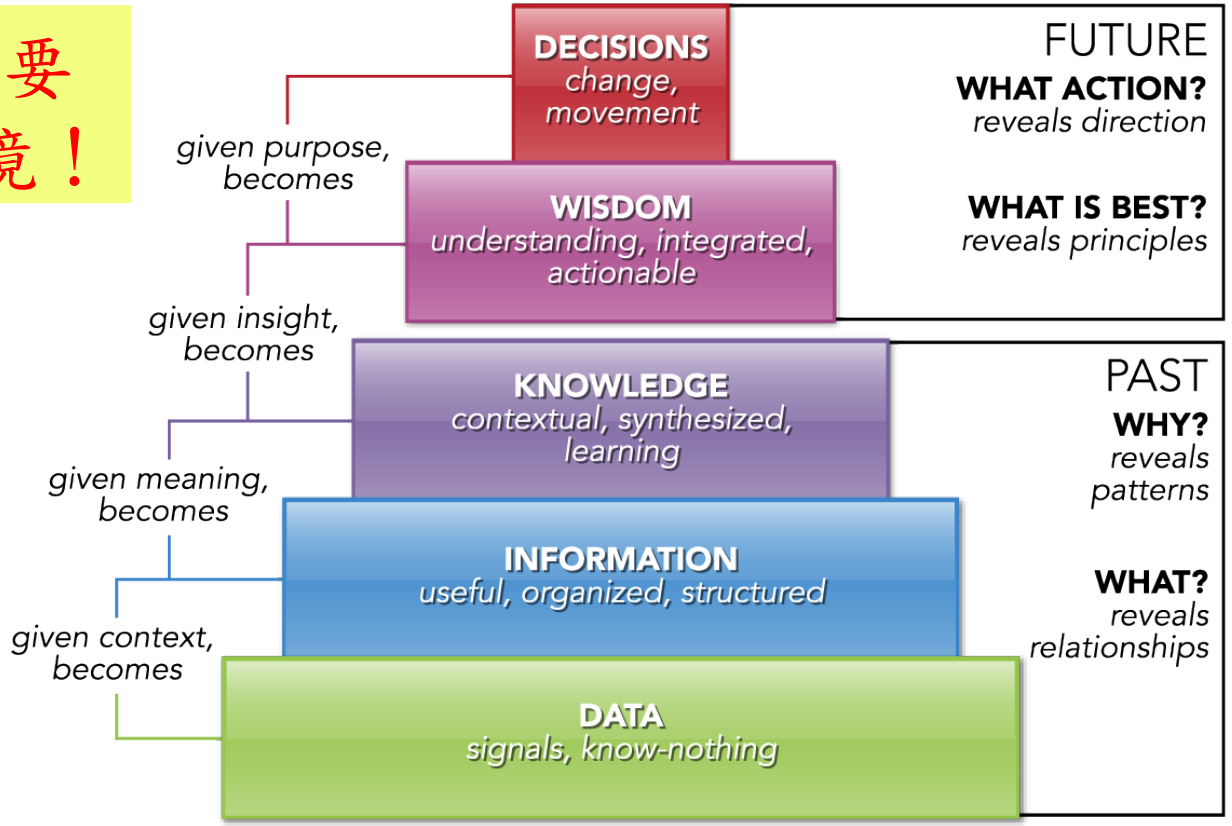

http://www.pursuantgroup.com/blog/tag/dikw-model/

巨量資料的未來？ Future of Big Data ?

http://www.huffingtonpost.com/deb-roy/the-birth-of-a-word_b_2639625.html

TED WEEKENDS: Big Data Can Get Very Personal

Deb Roy ♥ Become a fan

Follow Like 79

The Birth of a Word

Like 8.5k share 3521 tweet 212 +1 296 email 1066 comment 222

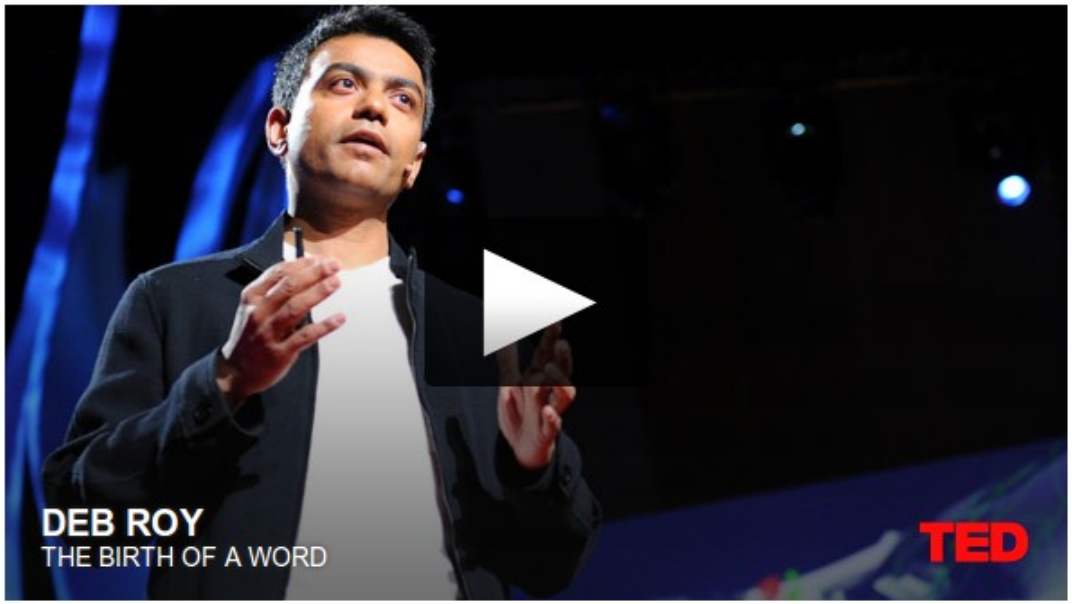

個人化的巨量資料

Big Data Can Get Very Personal

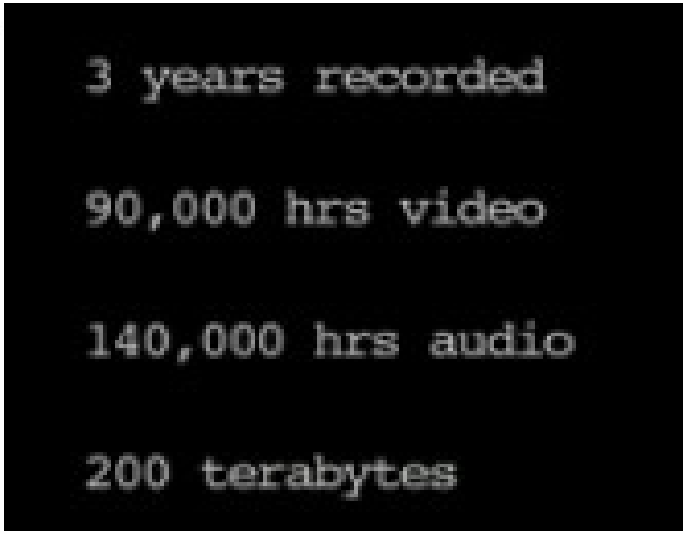

http://www.ted.com/talks/deb_roy_the_birth_of_a_word.html

問題與討論

知識有價，熱情無價！
社群也一樣需要永續經營

Questions?

Slides - http://trac.nchc.org.tw/cloud

Jazz Wang
Yao-Tsung Wang
jazz@nchc.org.tw

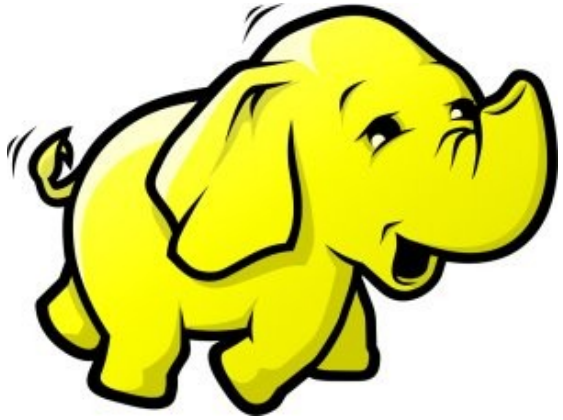

Hadoop 簡介：源起與術語

Introduction to Hadoop : History and Terminology

Jazz Wang

Yao-Tsung Wang

jazz@nchc.org.tw

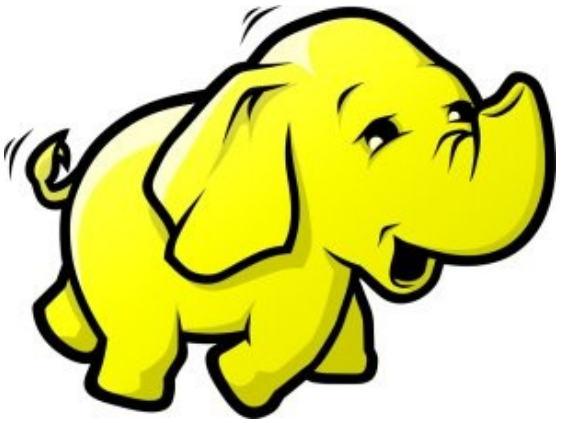

What is Hadoop ?

用一句話解釋 *Hadoop* 是什麼 ??

Hadoop is a software platform that lets one easily write and run applications that process vast amounts of data.

Hadoop 是一個讓使用者簡易撰寫並執行處理海量資料應用程式的軟體平台。

亦可以想像成一個處理海量資料的生產線，只須學會定義 ***map*** 跟 ***reduce*** 工作站該做哪些事情。

Features of Hadoop …
Hadoop 這套軟體的特色是 …

- **海量 Vast Amounts of Data**
  - 擁有儲存與處理大量資料的能力
  - Capability to STORE and PROCESS vast amounts of data.
- **經濟 Cost Efficiency**
  - 可以用在由一般 PC 所架設的叢集環境內
  - Based on large clusters built of commodity hardware.
- **效率 Parallel Performance**
  - 透過分散式檔案系統的幫助，以致得到快速的回應
  - With the help of HDFS, Hadoop have better performance.
- **可靠 Robustness**
  - 當某節點發生錯誤，能即時自動取得備份資料及佈署運算資源
  - Robustness to add and remove computing and storage resource without shutdown entire system.

Founder of Hadoop – Doug Cutting

Hadoop 這套軟體的創辦人 Doug Cutting

Doug Cutting Talks About The Founding Of Hadoop

http://www.youtube.com/watch?v=qxC4urJOchs

History of Hadoop ... 2002~2004

Hadoop 這套軟體的歷史源起 ... 2002~2004

- Lucene
  - http://lucene.apache.org/
  - 用Java 設計的高效能文件索引引擎API
  - a high-performance, full-featured **text search engine library** written entirely in **Java**.
  - 索引文件中的每一字，讓搜尋的效率比傳統逐字比較還要高的多
  - Lucene create an inverse index of every word in different documents. It enhance performance of text searching.

History of Hadoop ... 2002~2004

Hadoop 這套軟體的歷史源起 ... 2002~2004

- Nutch
  - http://nutch.apache.org/
  - Nutch 是基於開放原始碼所開發的網站搜尋引擎
  - Nutch is open source web-search software.
  - 利用Lucene 函式庫開發
  - It builds on Lucene and Solr, adding web-specifics, such as a crawler, a link-graph database, parsers for HTML and other document formats, etc.

Three Gifts from Google ....

來自 Google 的三個禮物 ....

- Nutch 後來遇到儲存大量網站資料的瓶頸
- Nutch encounter storage issue
- Google 在一些會議分享他們的三大關鍵技術
- Google shared their design of web-search engine
  - SOSP 2003 : “The Google File System”
  - http://labs.google.com/papers/gfs.html
  - OSDI 2004 : “MapReduce : Simplifed Data Processing on Large Cluster”
  - http://labs.google.com/papers/mapreduce.html
  - OSDI 2006 : “Bigtable: A Distributed Storage System for Structured Data”
  - http://labs.google.com/papers/bigtable-osdi06.pdf

History of Hadoop … 2004 ~ Now

Hadoop 這套軟體的歷史源起 ... 2004 ~ Now

- Dong Cutting reference from Google's publication
- Added DFS & MapReduce implement to Nutch
- According to user feedback on the mail list of Nutch ....
- Hadoop became separated project since Nutch 0.8
- Nutch DFS → Hadoop Distributed File System (HDFS)
- Yahoo hire Dong Cutting to build a team of web search engine at year 2006.
  - Only 14 team members (engineers, clusters, users, etc.)
- Doung Cutting joined Cloudera at year 2009.

YAHOO!

cloudera

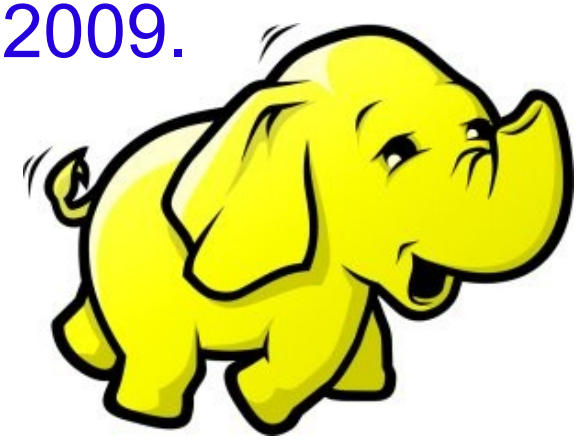

Who Use Hadoop ??

有哪些公司在用 Hadoop 這套軟體 ??

- Yahoo is the key contributor currently.
- IBM and Google teach Hadoop in universities …
- http://www.google.com/intl/en/press/pressrel/20071008_ibm_univ.html
- The New York Times used 100 Amazon EC2 instances and a Hadoop application to process 4TB of raw image TIFF data (stored in S3) into 11 million finished PDFs in the space of 24 hours at a computation cost of about $240 (not including bandwidth)

  – from http://en.wikipedia.org/wiki/Hadoop
- http://wiki.apache.org/hadoop/AmazonEC2
- http://wiki.apache.org/hadoop/PoweredBy

- A9.com
- ADSDAQ by Contextweb
- EHarmony
- Facebook
- Fox Interactive Media
- IBM
- ImageShack
- ISI
- Joost
- Last.fm
- Powerset
- The New York Times
- Rackspace
- Veoh
- Metaweb

Hadoop in production run ....
商業運轉中的 Hadoop 應用 ....

- February 19, 2008
- Yahoo! Launches World's Largest Hadoop Production Application
- http://developer.yahoo.net/blogs/hadoop/2008/02/yahoo-worlds-largest-production-hadoop.html

Number of links between pages in the index	roughly 1 trillion links
Size of output	over 300 TB, compressed!
Number of cores used to run single Map-Reduce job	over 10,000
Raw disk used in the production cluster	over 5 Petabytes

Hadoop in production run ....
商業運轉中的 Hadoop 應用 ....

- September 30, 2008
- Scaling Hadoop to 4000 nodes at Yahoo!
- http://developer.yahoo.net/blogs/hadoop/2008/09/scaling_hadoop_to_4000_nodes_a.html

Total Nodes	**4000**
Total cores	**30000**
Data	**16PB**

	500-node cluster		4000-node cluster	
	write	**read**	**write**	**read**
number of files	990	990	14,000	14,000
file size (MB)	320	320	360	360
total MB processes	316,800	316,800	5,040,000	5,040,000
tasks per node	2	2	4	4
avg. throughput (MB/s)	**5.8**	**18**	**40**	**66**

Comparison between Google and Hadoop
Google 與 Hadoop 的比較表

Develop Group	Google	Apache
Sponsor	Google	Yahoo, Amazon
Algorithm Method	MapReduce	MapReduce
Resource	open document	open source
File System (MapReduce)	GFS	HDFS
Storage System (for structure data)	big-table	HBase
Search Engine	Google	Nutch
OS	Linux	Linux / GPL

Why should we learn Hadoop ?
爲何需要學習 Hadoop ??

Search Jobs | Browse Jobs | Local Jobs | Salaries | Employment Trends

simplyhired®
job search made simple

Employment Trends

Xen, Hyper-V, Hadoop

Tip: You can compare trends by separating them with commas.

Xen, Hyper-v, Hadoop Trends

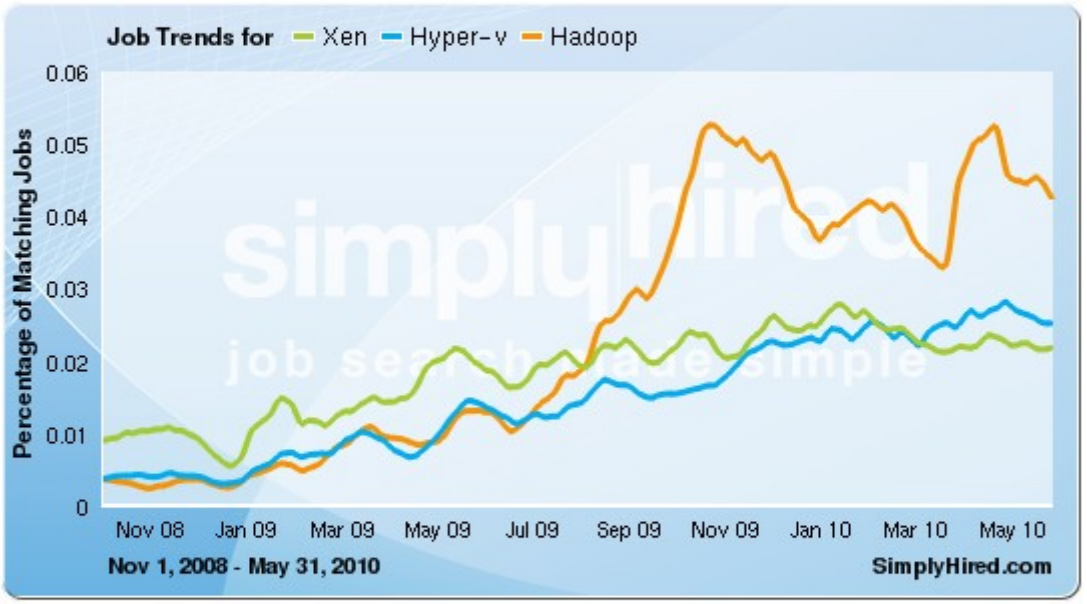

Xen, Hyper-v, Hadoop Job Trends

This graph displays the percentage of jobs with your search terms anywhere in the job listing. Since November 2008, the following has occurred:

- Xen jobs increased 141%
- Hyper-v jobs increased 551%
- Hadoop jobs did not change or there is no data available

1. Data Explore
資訊大爆炸

2. Data Mining Tool
方便作資料探勘的工作

3. Looking for Jobs
好找工作 !!

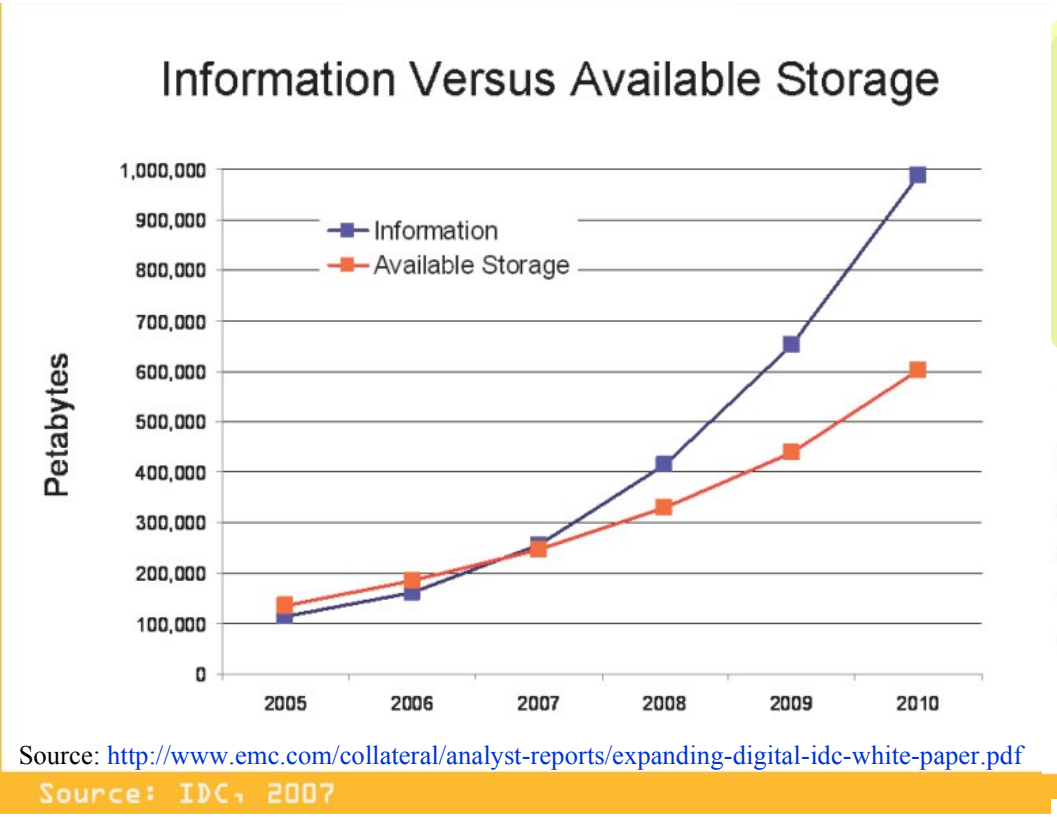

2007 Data Explore

Top 1 : Human Genomics – 7000 PB / Year
Top 2 : Digital Photos – 1000 PB+/ Year
Top 3 : E-mail (no Spam) – 300 PB+ / Year

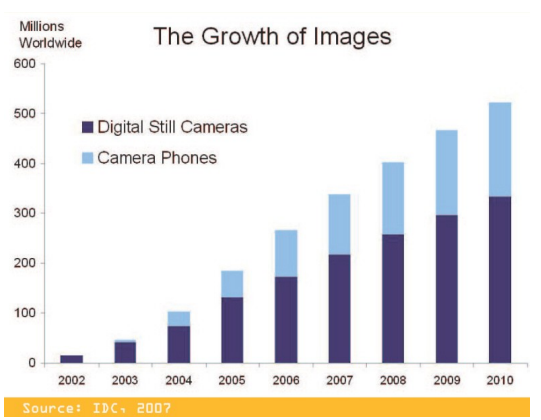

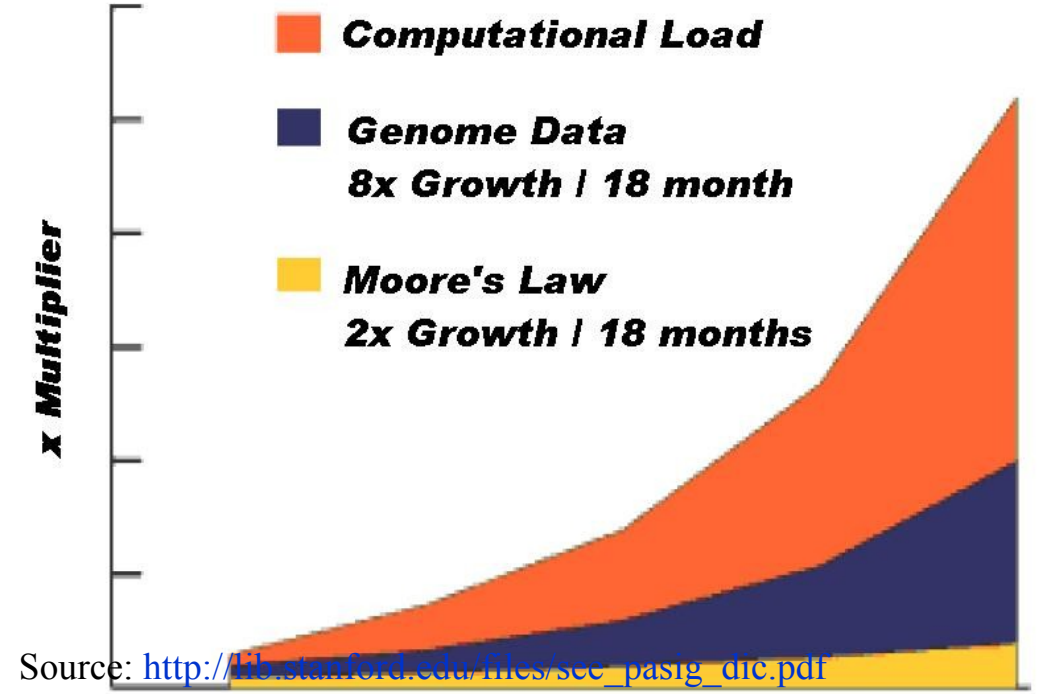

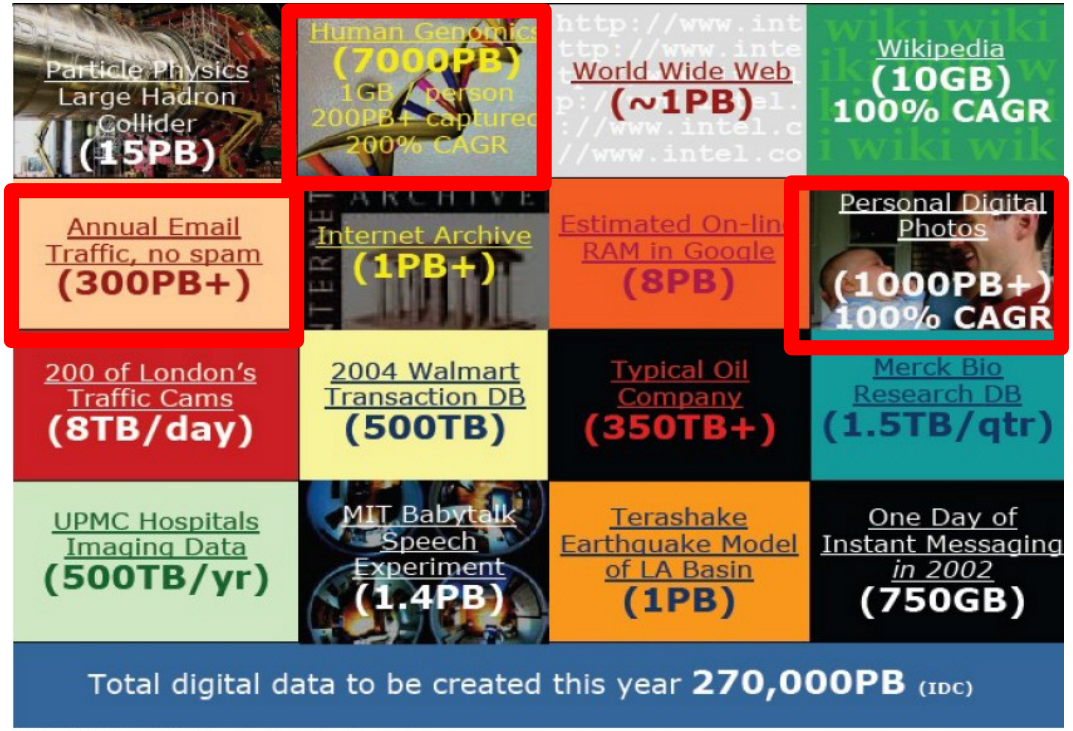

Hadoop 專業術語

Introduction to Hadoop Terminology

Jazz Wang
Yao-Tsung Wang
jazz@nchc.org.tw

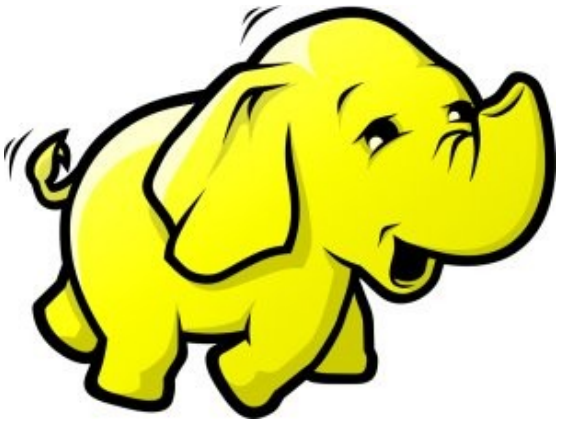

Two Key Elements of Operating System
作業系統兩大關鍵組成元素

Scheduler
程序排程

File System
檔案系統

Terminologies of Hadoop

Hadoop 文件中的專業術語

- Job
  - 任務
- Task
  - 小工作
- JobTracker
  - 任務分派者
- TaskTracker
  - 小工作的執行者
- Client
  - 發起任務的客戶端
- Map
  - 應對
- Reduce
  - 總和

- Namenode
  - 名稱節點
- Datanode
  - 資料節點
- Namespace
  - 名稱空間
- Replication
  - 副本
- Blocks
  - 檔案區塊 (64M)
- Metadata
  - 屬性資料

Two Key Roles of HDFS
HDFS 軟體架構的兩種關鍵角色

名稱節點 NameNode

- Master Node
- Manage NameSpace of HDFS
- Control Permission of Read and Write
- Define the policy of Replication
- Audit and Record the NameSpace
- Single Point of Failure

資料節點 DataNode

- Worker Nodes
- Perform operation of Read and Write
- Execute the request of Replication
- Multiple Nodes

Two Key Roles of Job Scheduler
程序排程的兩種關鍵角色

JobTracker

- **Master Node**
- **Receive Jobs from Hadoop Clients**
- **Assigned Tasks to TaskTrackers**
- **Define Job Queuing Policy, Priority and Error Handling**
- **Single Point of Failure**

TaskTracker

- **Worker Nodes**
- **Excute Mapper and Reducer Tasks**
- **Save Results and report task status**
- **Multiple Nodes**

Different Roles of Hadoop Architecture
Hadoop 軟體架構中的不同角色

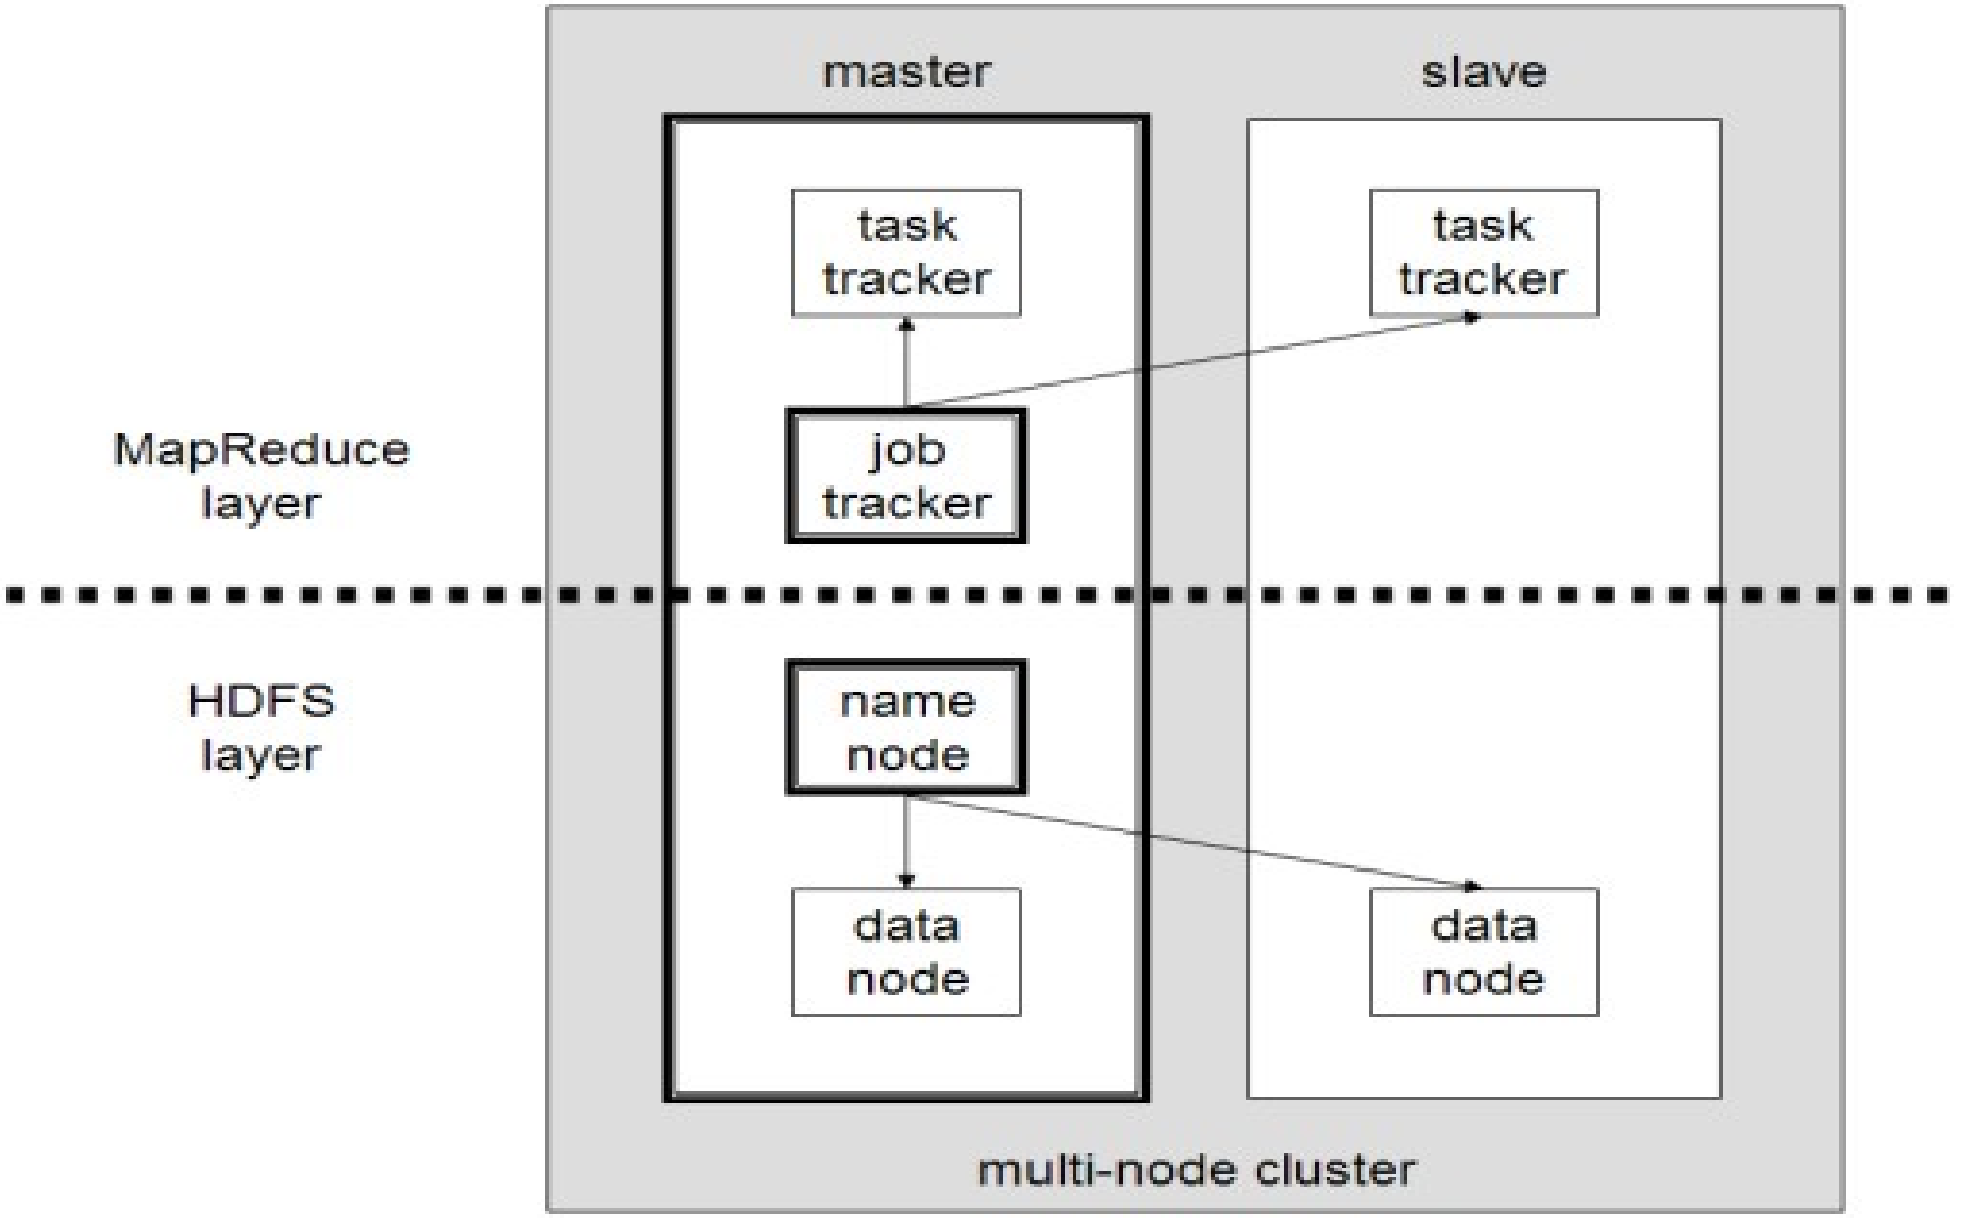

Distributed Operating System of Hadoop

Hadoop 建構成一個分散式作業系統

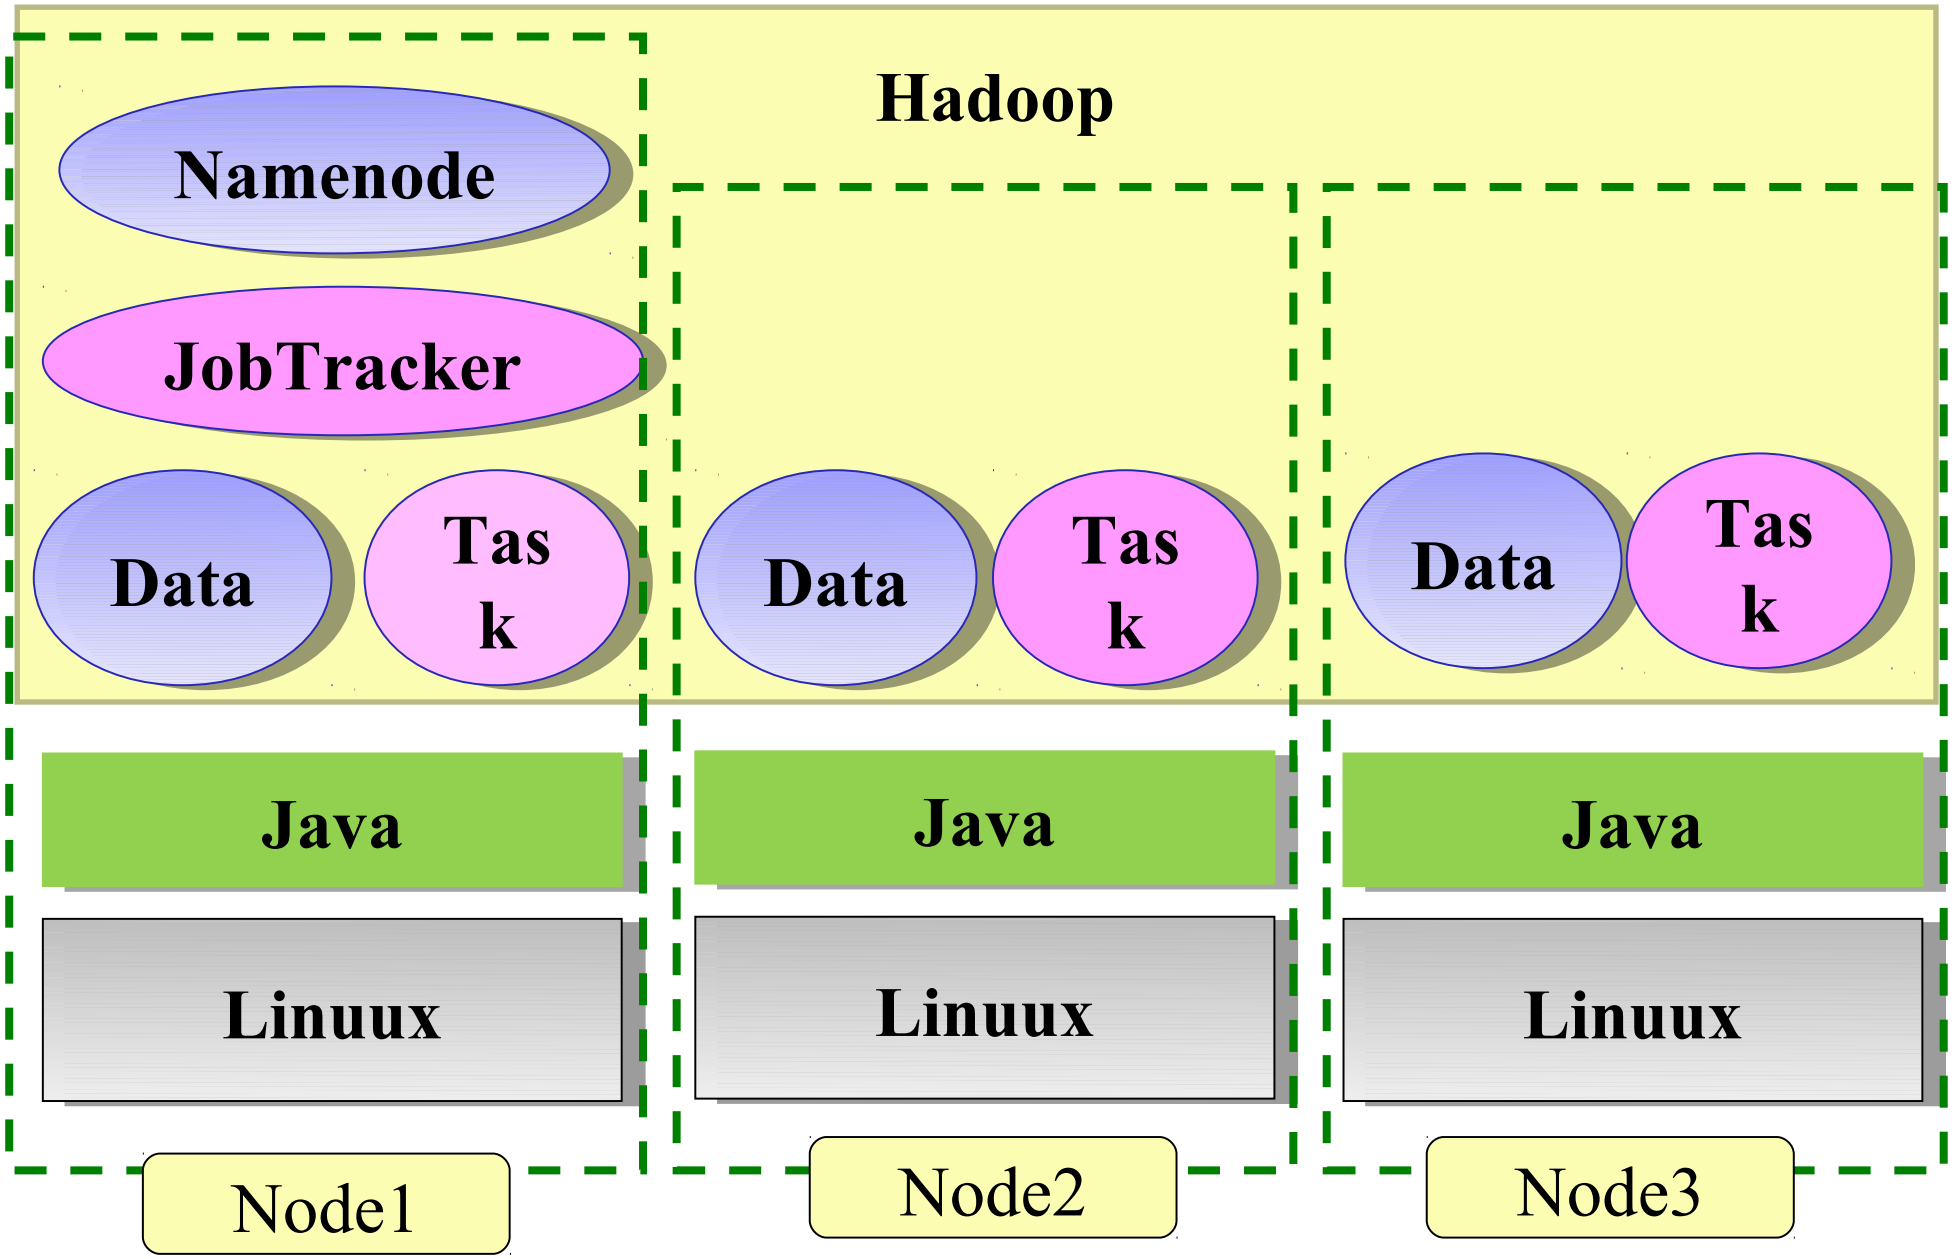

About Hadoop Client ...
不在雲裡的 Hadoop Client

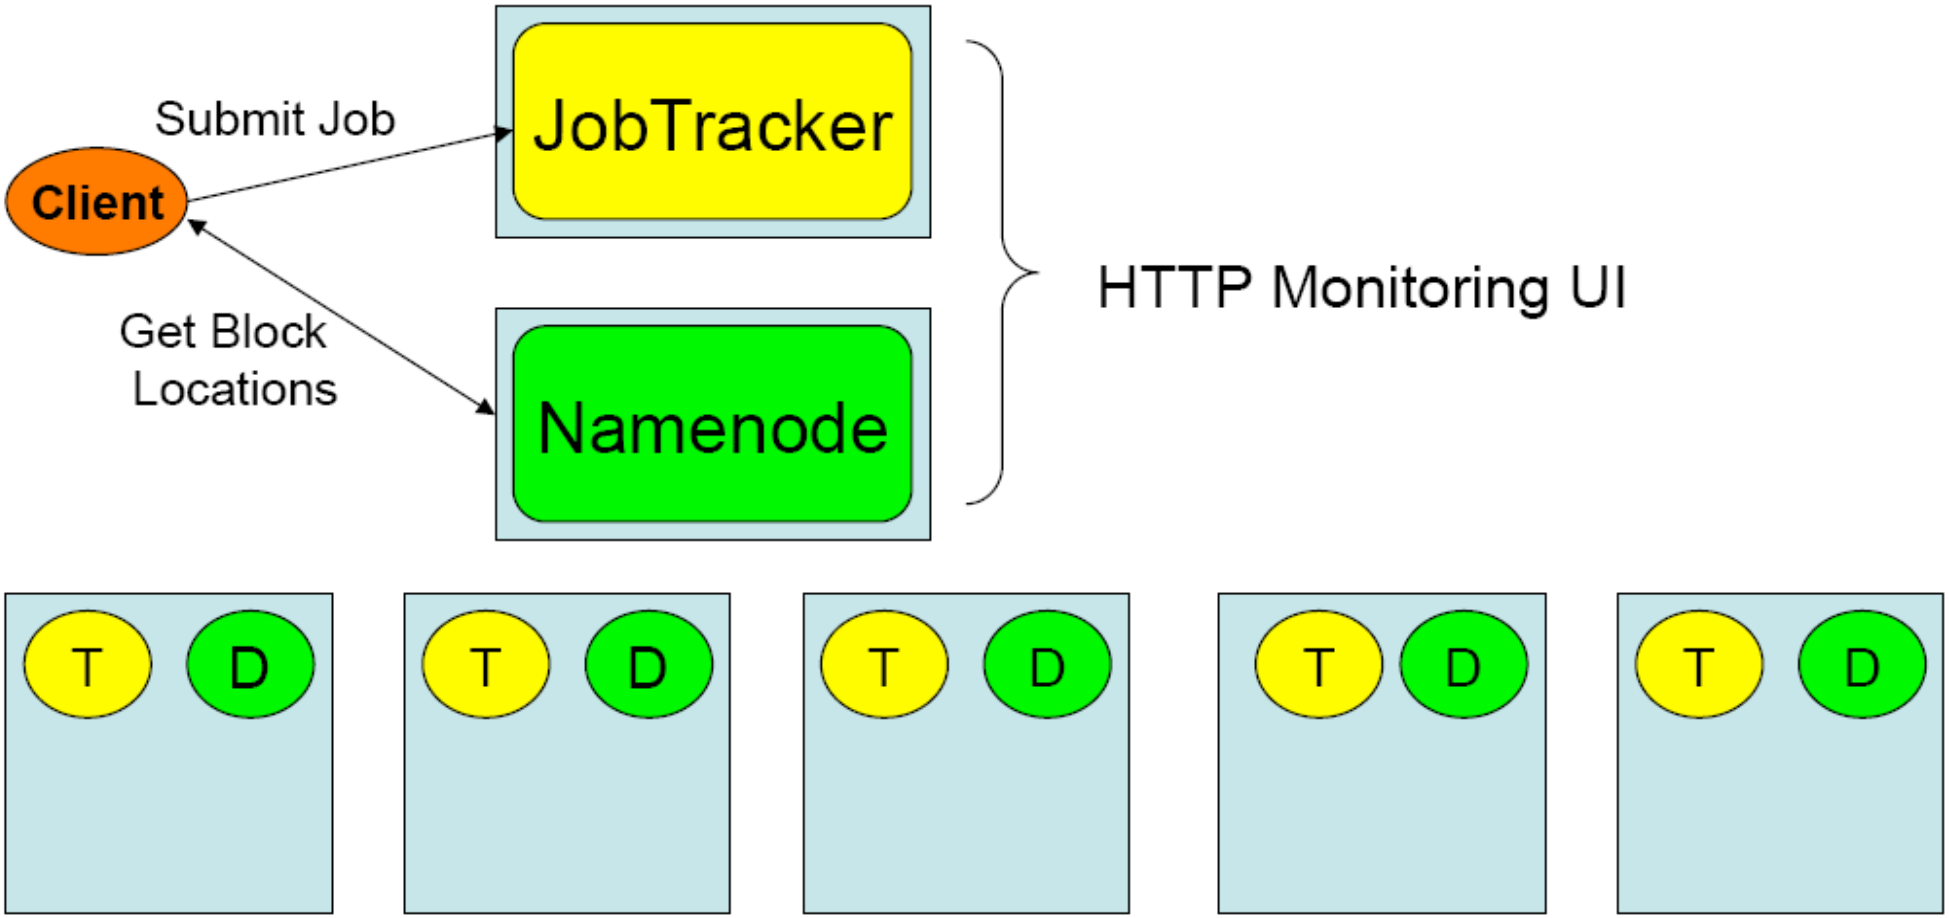

What we learn today ?

WHAT	Hadoop 是運算海量資料的軟體平台 !! hadoop is a software platform to process vast amount of data!!
WHO	始祖是 Doug Cutting ， Apache 社群支持， Yahoo 贊助 From Doug Cutting to Apache Community, Yahoo and more !
WHEN	Hadoop 是 2004 年從 Nutch 分裂出來的專案 !! Hadoop became separate project since year 2004 !!
WHY	資料大爆炸、資料探勘、找工作 Data Explore, Data Mining, Jobs !!
HOW	建構在大型的個人電腦叢集之上 Install on large clusters built of commodity hardware !!

Questions?

Slides - http://trac.nchc.org.tw/cloud

Jazz Wang
Yao-Tsung Wang
jazz@nchc.org.tw

Powered by DRBL

HDFS 簡介

Introduction to Hadoop Distributed File System

Jazz Wang

Yao-Tsung Wang

jazz@nchc.org.tw

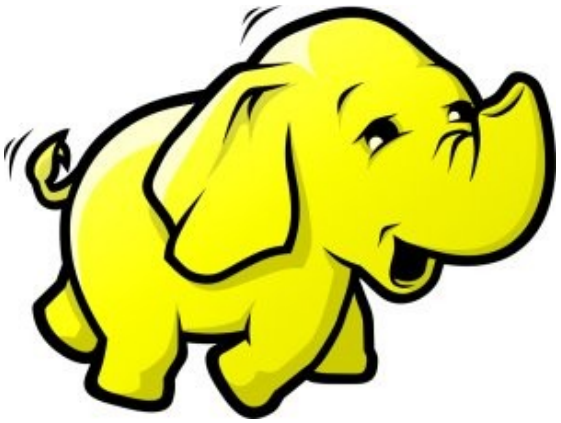

What is HDFS ??
什麼是 HDFS ??

- **Hadoop Distributed File System**
  - 實現類似 Google File System 分散式檔案系統
  - Reference from Google File System.
  - 一個易於擴充的分散式檔案系統，目的爲對大量資料進行分析
  - A scalable distributed file system for large data analysis .
  - 運作於廉價的普通硬體上，又可以提供容錯功能
  - based on commodity hardware with high fault-tolerant.
  - 給大量的用户提供總體性能較高的服務
  - It have better overall performance to serve large amount of users.

Features of HDFS ...
HDFS 的特色是 ...

- **硬體錯誤容忍能力 Fault Tolerance**
  - 硬體錯誤是正常而非異常
  - Failure is the norm rather than exception
  - 自動恢復或故障排除
  - automatic recovery or report failure
- **串流式的資料存取 Streaming data access**
  - 批次處理多於用户交互處理
  - Batch processing rather than interactive user access.
  - 高 Throughput 而非低 Latency
  - High aggregate data bandwidth (throughput)

Features of HDFS ...
HDFS 的特色是 ...

- **大規模資料集 Large data sets and files**
  - 支援 Petabytes 等級的磁碟空間
  - Support Petabytes size
- **一致性模型 Coherency Model**
  - 一次寫入，多次存取 Write-once-read-many
  - 簡化一致性處理問題 This assumption simplifies coherency
- **在地運算 Data Locality**
  - 到資料的節點上計算 > 將資料從遠端複製過來計算
  - “move compute to data” > “move data to compute”
- **異質平台移植性 Heterogeneous**
  - 即使硬體不同也可移植、擴充
  - HDFS could be deployed on different hardware

Parallel Computing using NFS storage
使用 NFS 進行平行運算

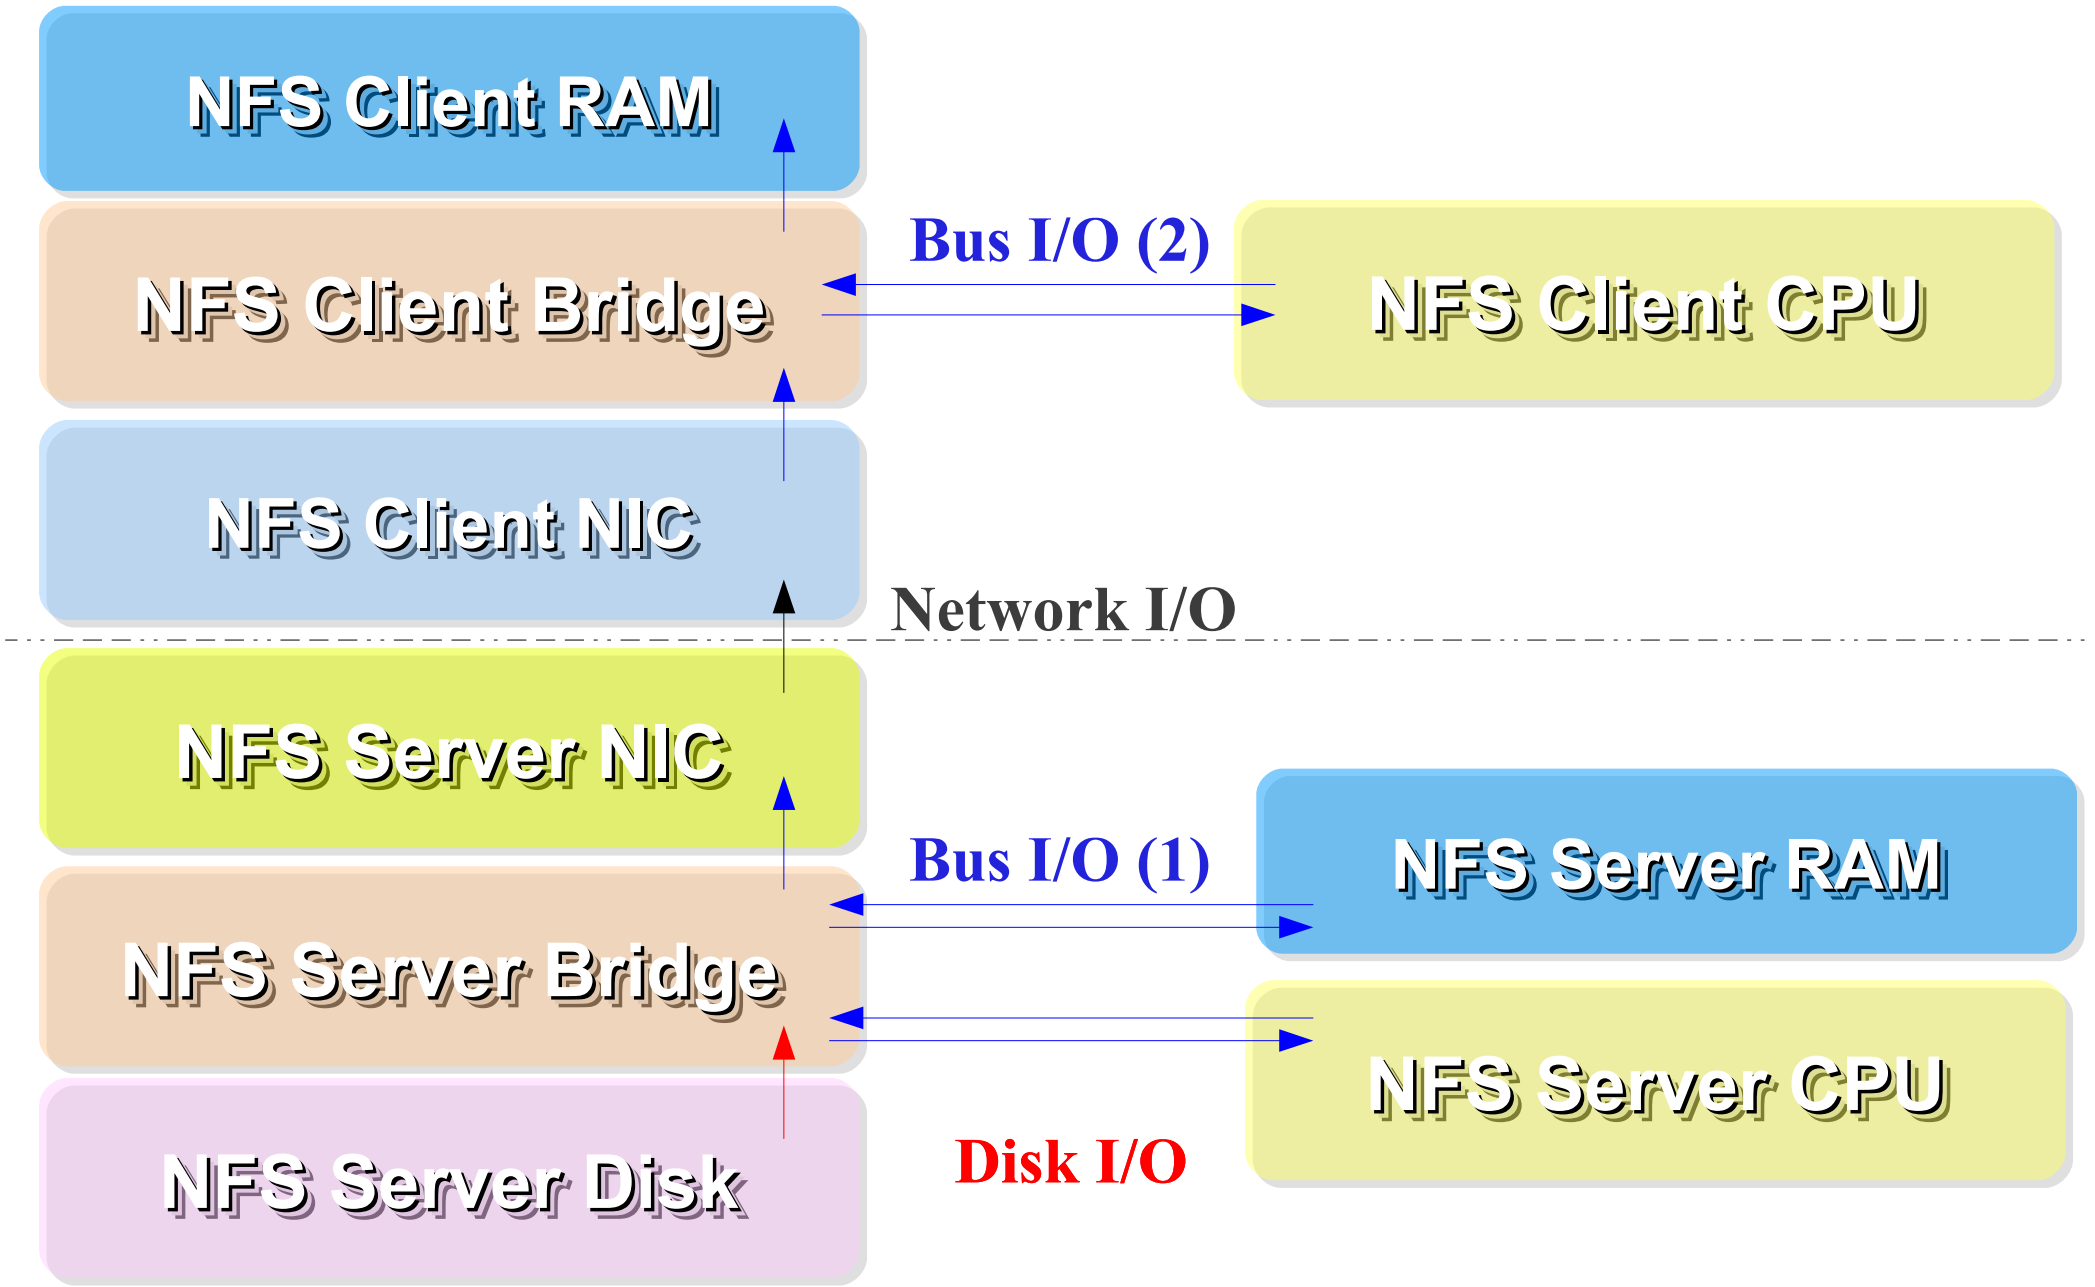

Parallel Computing using HDFS
使用 HDFS 進行平行運算

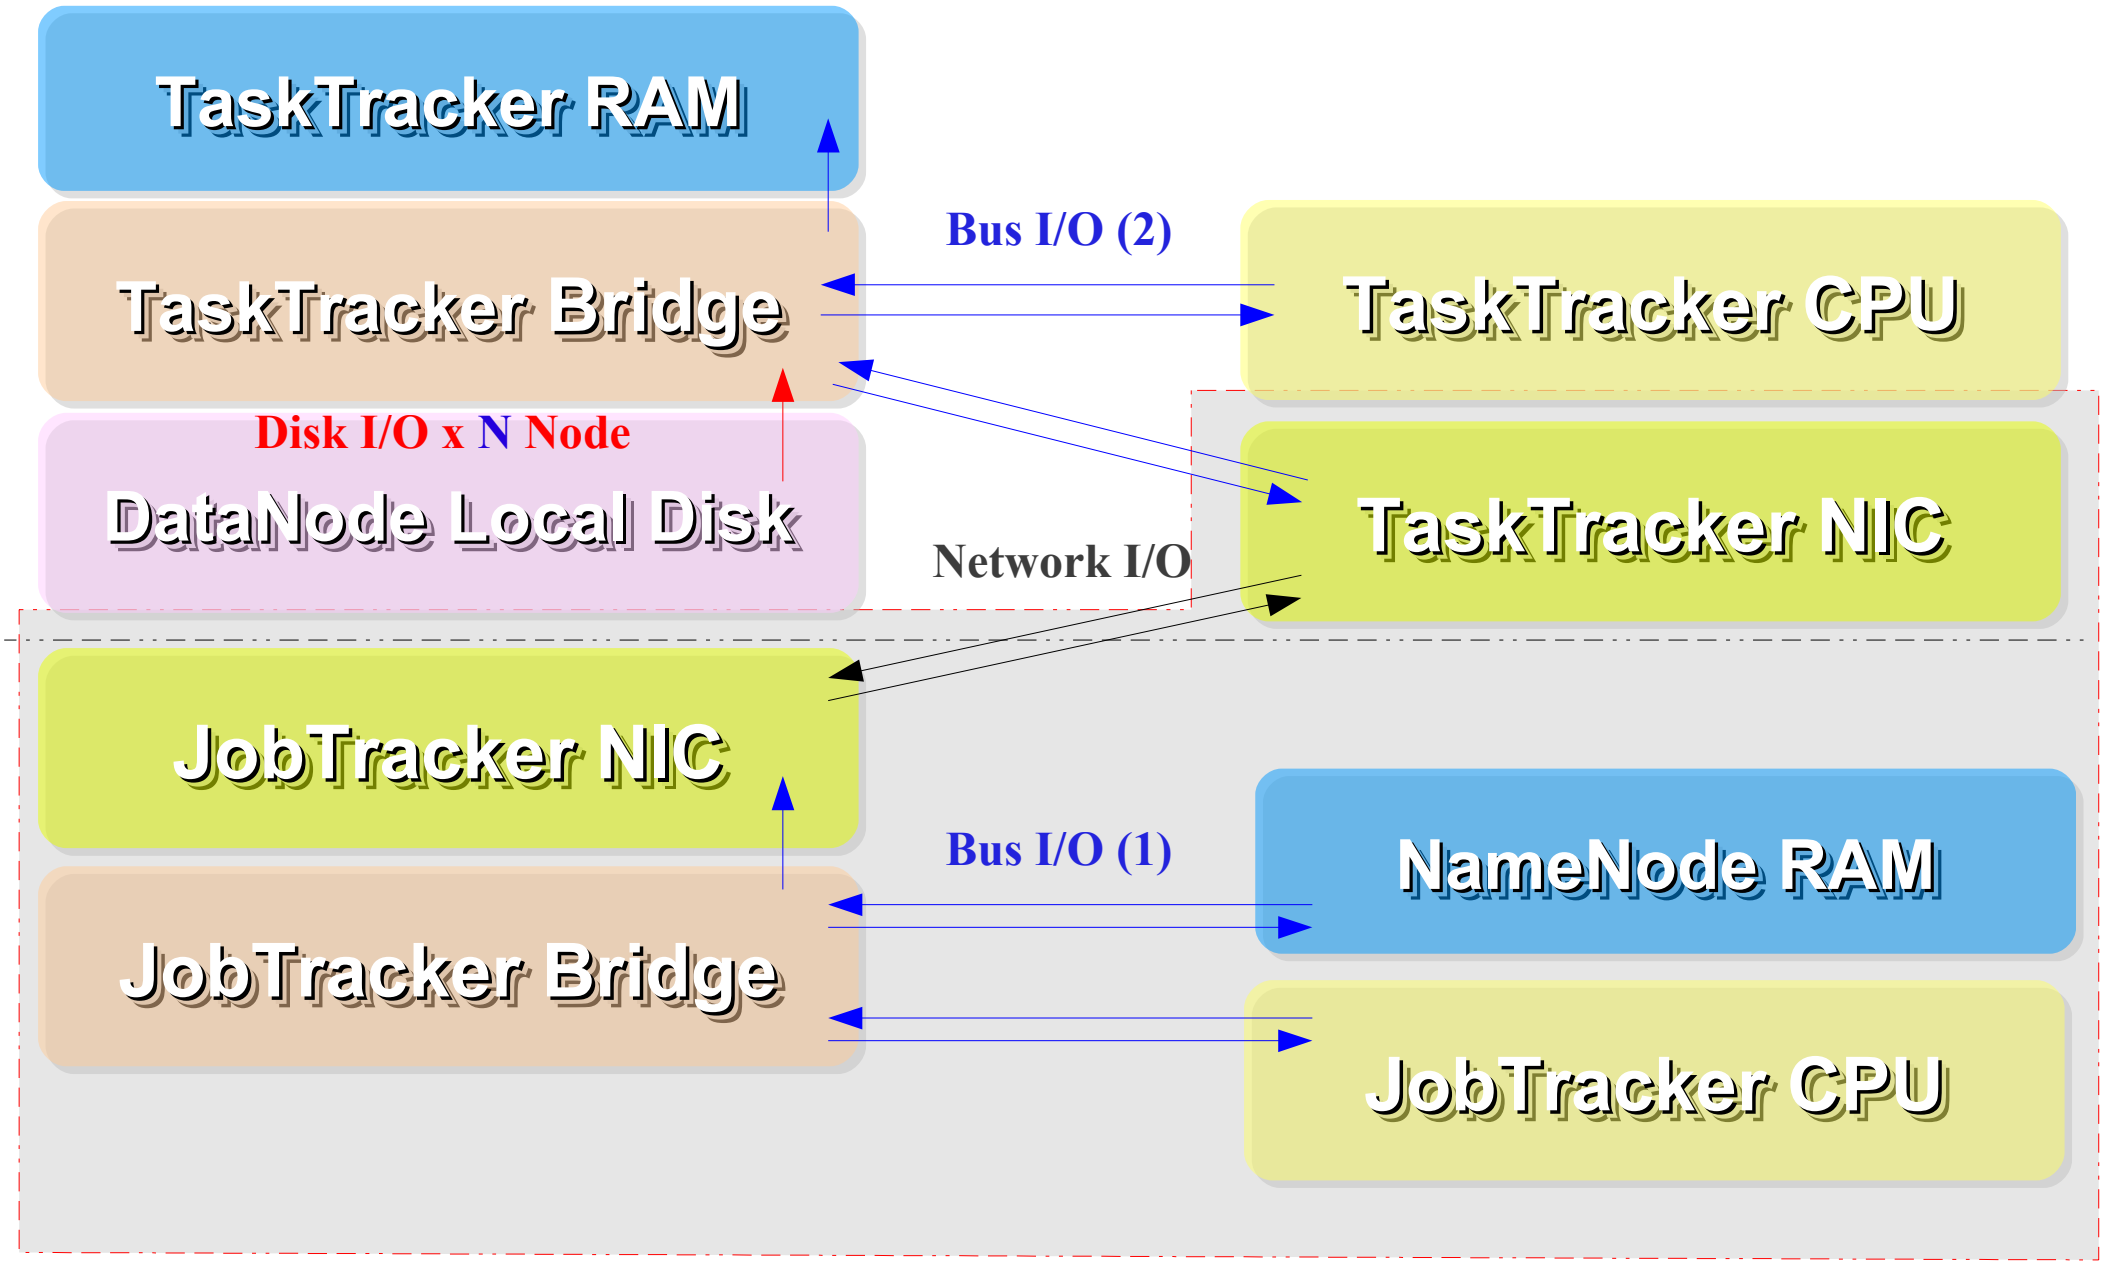

How HDFS manage data ...

HDFS 如何管理資料 ...

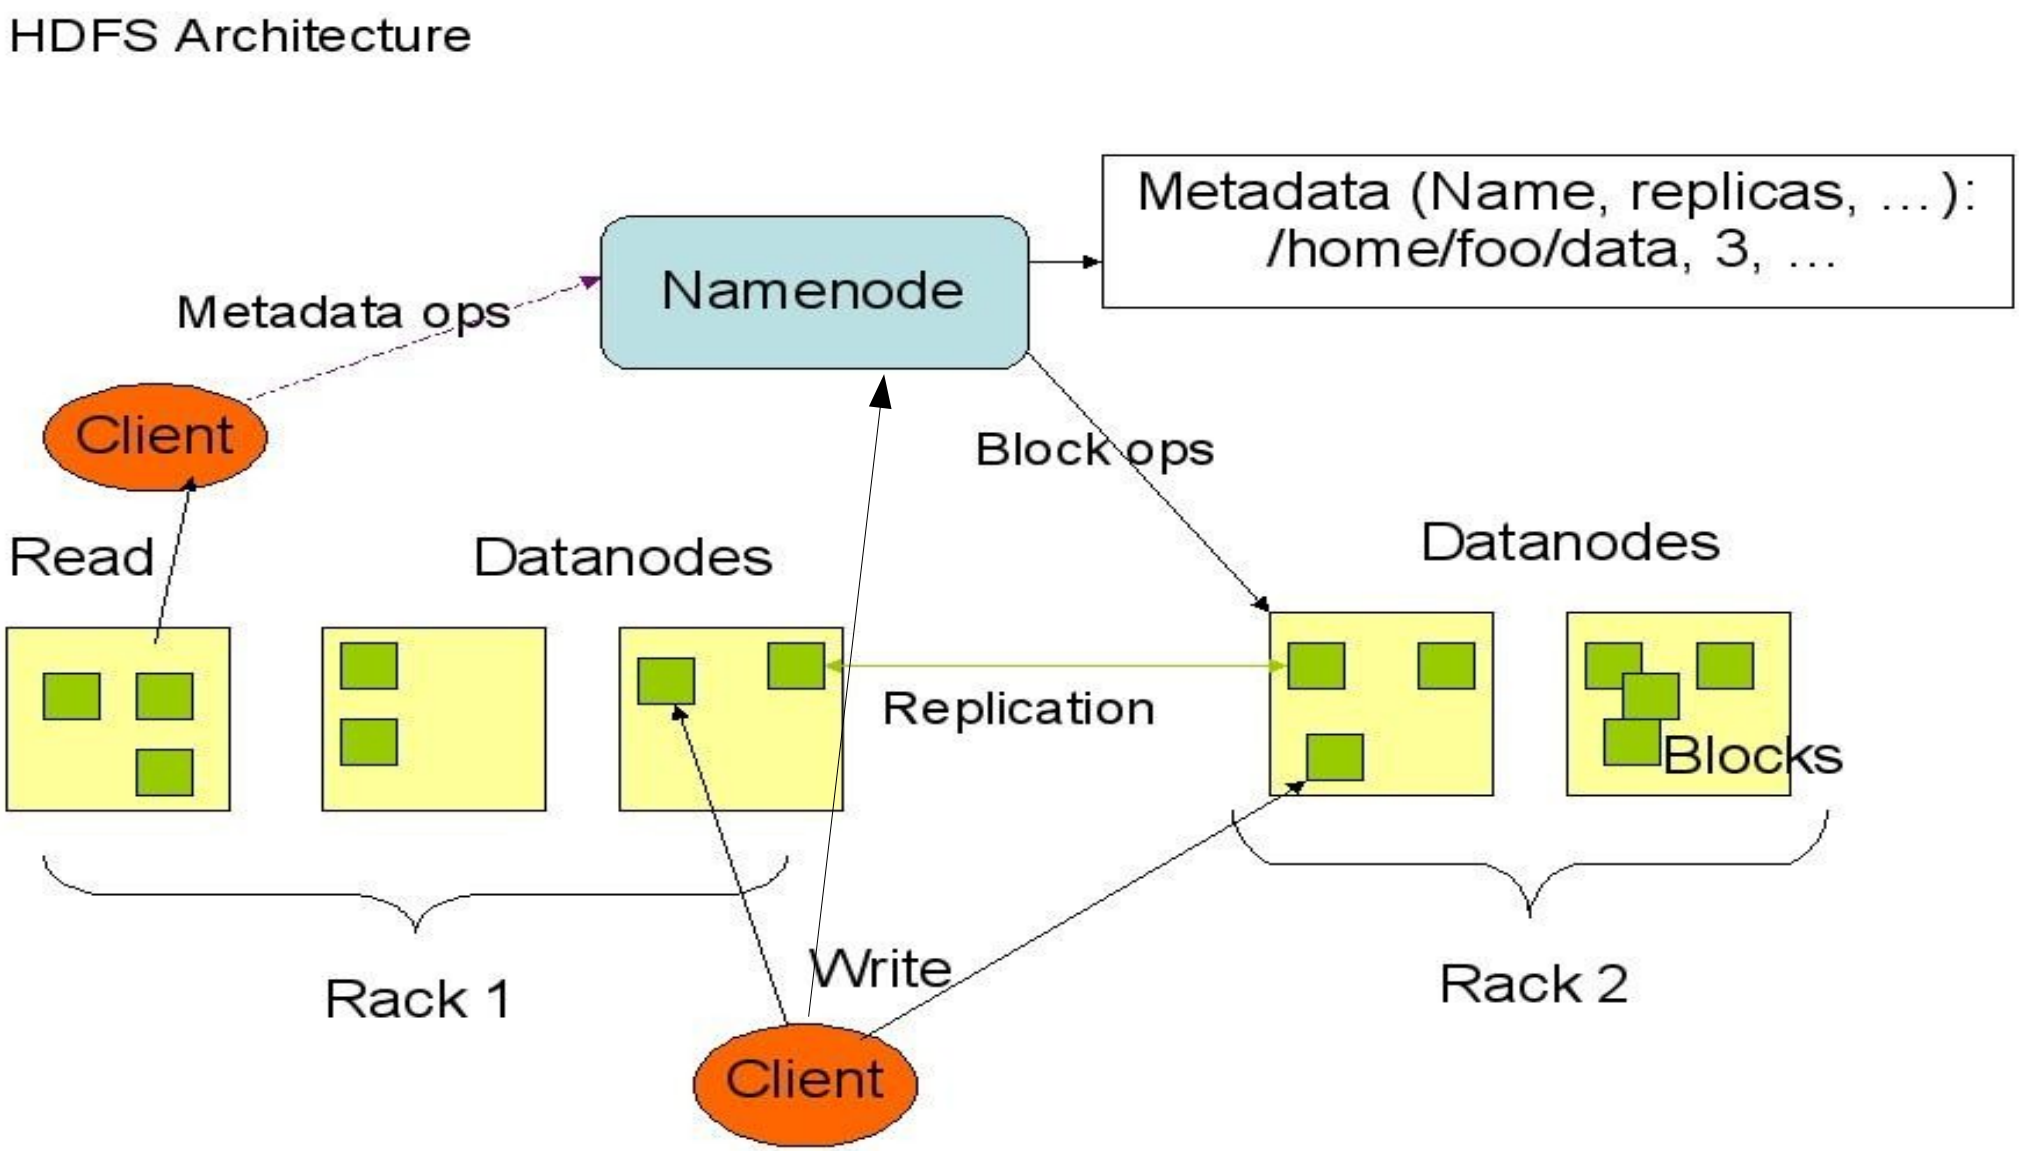

How does HDFS work ...

HDFS 如何運作 ...

Namenode (the master)

Path and Filename – Replication , blocks

name:/users/joeYahoo/myFile - copies:2, blocks:{1,3}
name:/users/bobYahoo/someData.gzip, copies:3, blocks:{2,4,5}

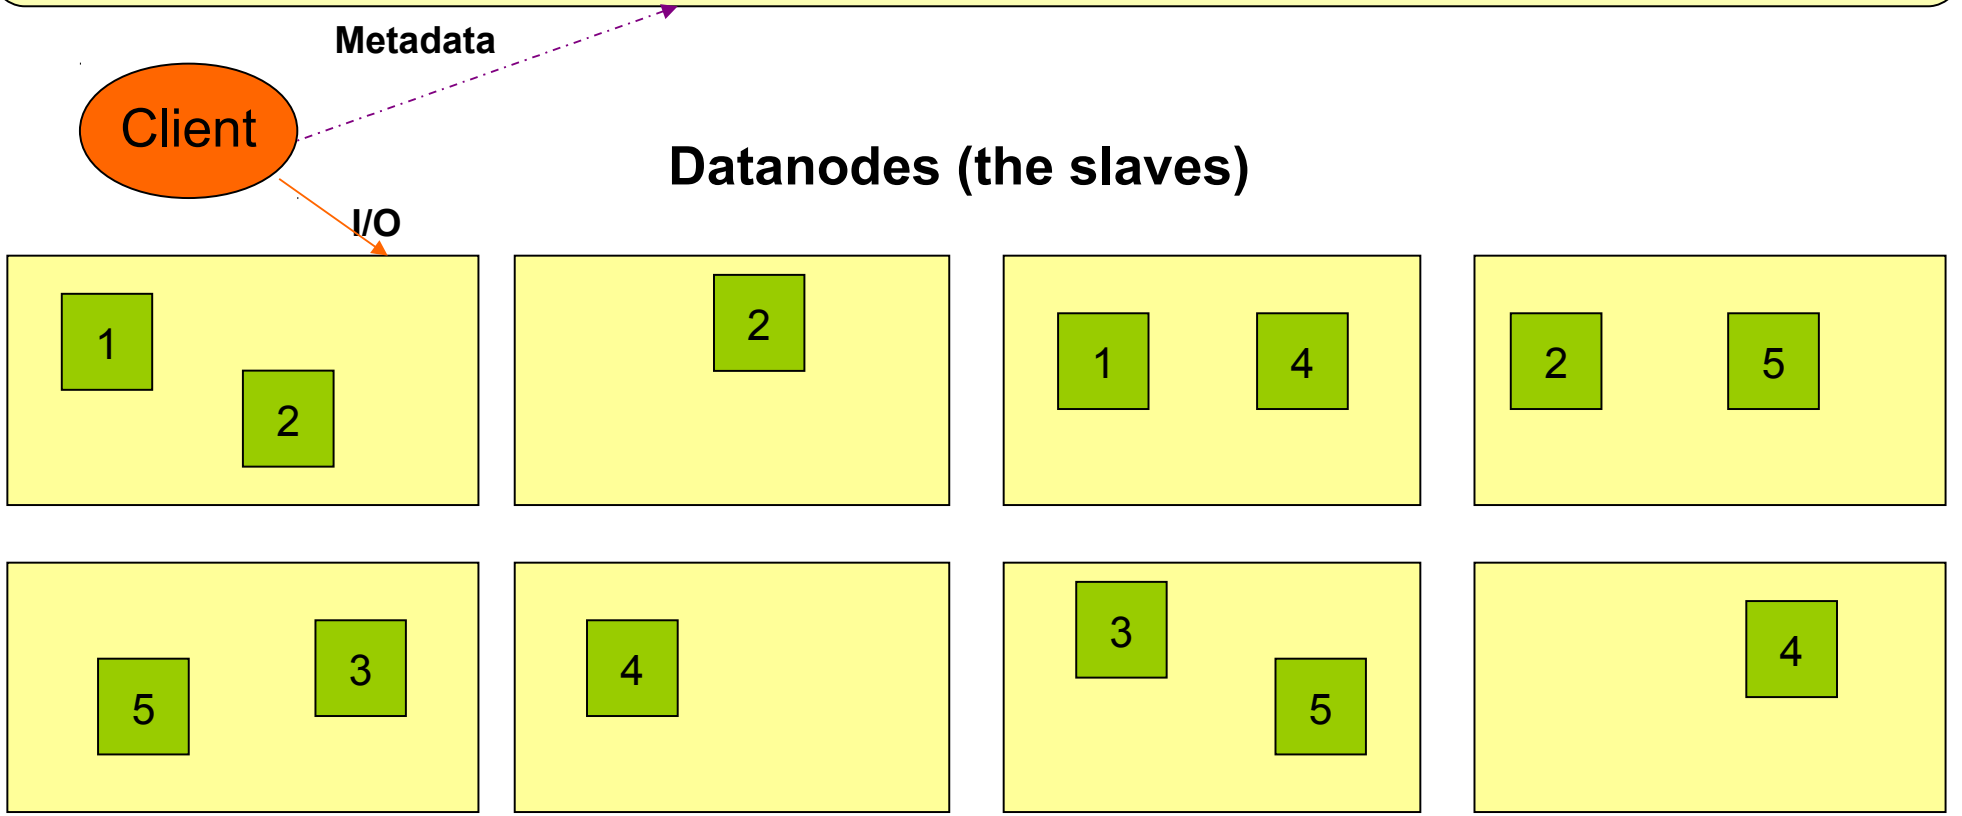

About Data locality ...

HDFS 如何達成在地運算 ...

- Increase reliability and read bandwidth
  - robustness ： read replication while found any failure
  - High read bandwith ： distribute read （ but increase write bottlenet ）

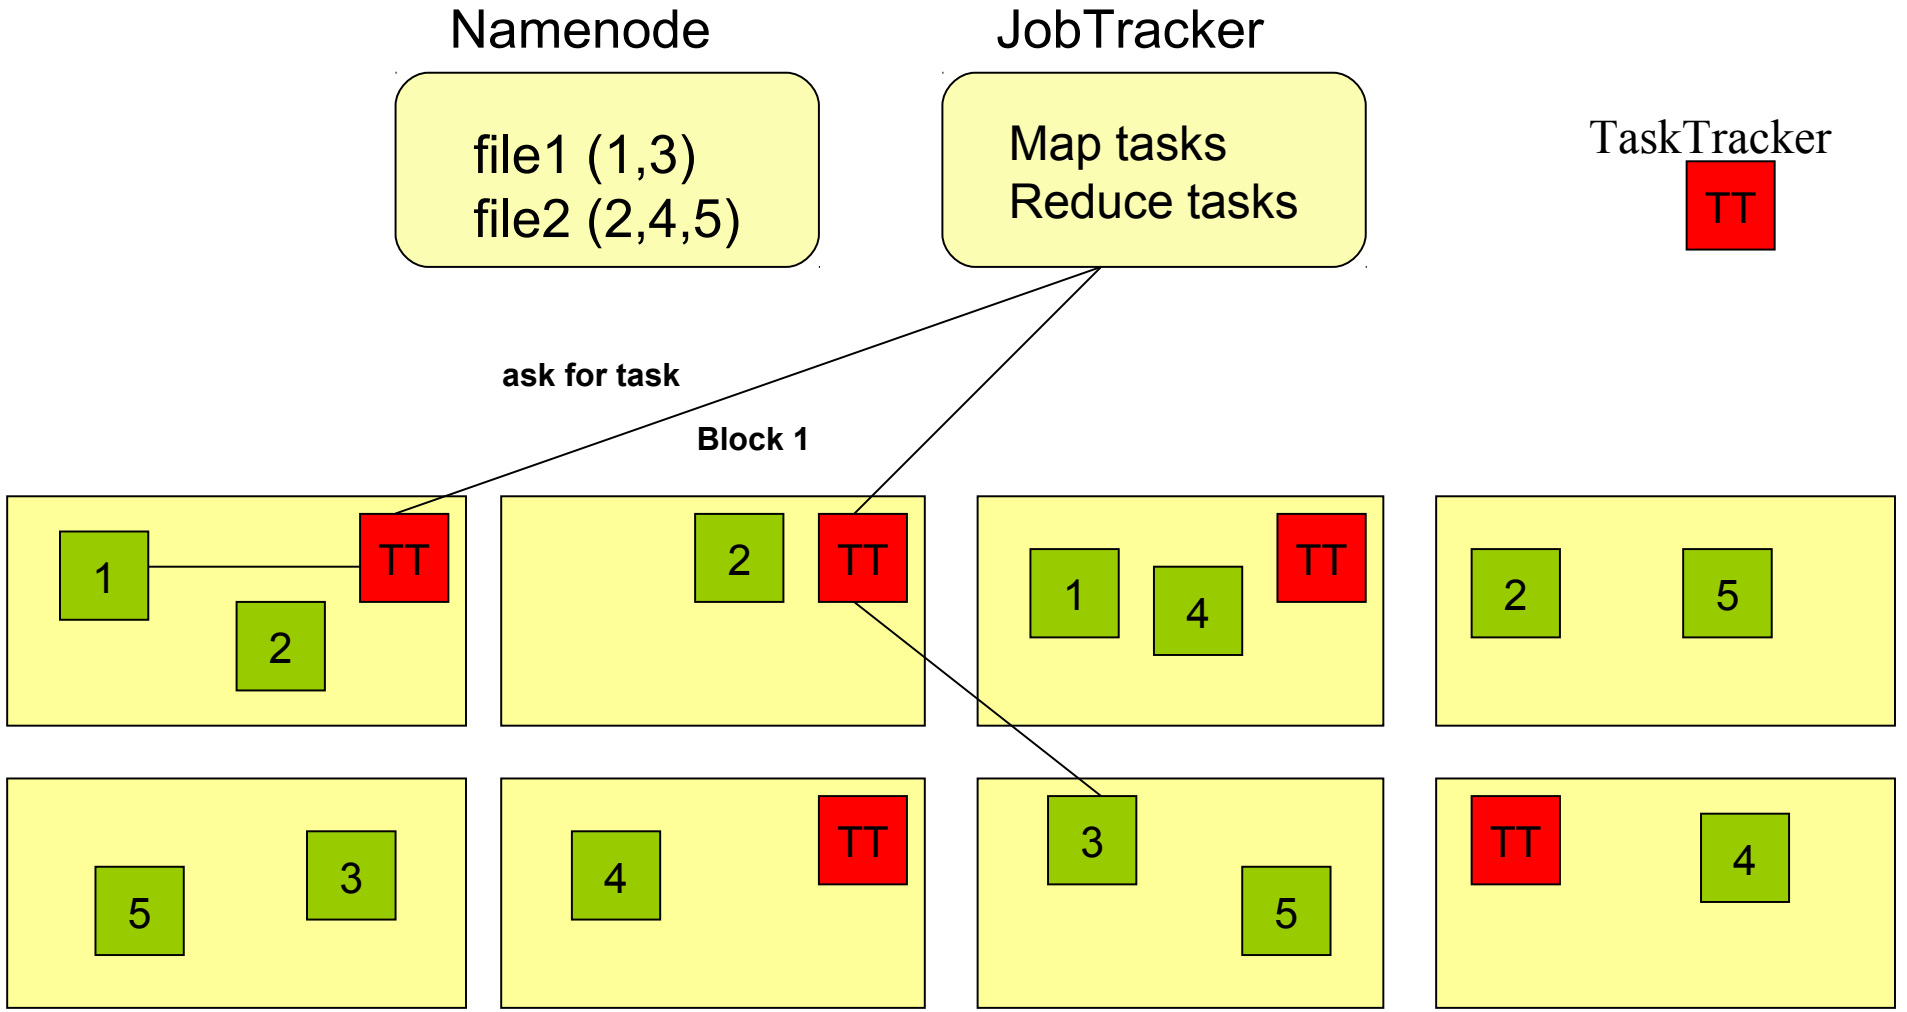

9

About Fault Tolerance ...

HDFS 如何達成容錯機制 ...

資料崩毀
Data Corrupt

網路或資料節點失效
Network Fault
DataNode Fault

名稱節點錯誤
NameNode Fault

- 資料完整性 Data integrity
  - checked with CRC32
  - 用副本取代出錯資料
  - Replcae corrupt block with replication one
- Heartbeat
  - Datanode send heartbeat to Namenode
- Metadata
  - FSImage、Editlog 爲核心印象檔及日誌檔
  - FSImage – core file system mapping image
  - Editlog – like. SQL transaction log
  - 多份儲存，當名稱節點故障時可以手動復原
  - Multiple backups of FSImage and Editlog
  - Manually recovery while NameNode Fault

10

Coherency Model and Performance of HDFS
HDFS 的一致性機制與效能 ...

- **檔案一致性機制 Coherency model of files**
  - 刪除檔案＼新增寫入檔案＼讀取檔案皆由名稱節點負責
  - NameNode handle the operation of write, read and delete.
- **巨量空間及效能機制 Large Data Set and Performance**
  - 預設每個區塊大小以 64MB 爲單位
  - By default, the block size is 64MB
  - 大區塊可提高存取效率
  - Bigger block size will enhance read performance
  - 檔案有可能大過一顆磁碟
  - Single file stored on HDFS might be larger than single physical disk of DataNode.
  - 區塊均勻散佈各節點以分散讀取流量
  - Fully distributed blocks increase throughput of reading.

POSIX like HDFS commands

與 POSIX 相似的操作指令 ...

```
jazz@hadoop:~$ hadoop fs
Usage: java FsShell
           [-ls <path>]
           [-lsr <path>]
           [-du <path>]
           [-dus <path>]
           [-count[-q] <path>]
           [-mv <src> <dst>]
           [-cp <src> <dst>]
           [-rm <path>]
           [-rmr <path>]
           [-expunge]
           [-put <localsrc> ... <dst>]
           [-copyFromLocal <localsrc> ... <dst>]
           [-moveFromLocal <localsrc> ... <dst>]
           [-get [-ignoreCrc] [-crc] <src> <localdst>]
           [-getmerge <src> <localdst> [addnl]]
           [-cat <src>]
           [-text <src>]
           [-copyToLocal [-ignoreCrc] [-crc] <src> <localdst>]
           [-moveToLocal [-crc] <src> <localdst>]
           [-mkdir <path>]
           [-setrep [-R] [-w] <rep> <path/file>]
           [-touchz <path>]
           [-test -[ezd] <path>]
           [-stat [format] <path>]
           [-tail [-f] <file>]
           [-chmod [-R] <MODE[,MODE]... | OCTALMODE> PATH...]
           [-chown [-R] [OWNER][:[GROUP]] PATH...]
           [-chgrp [-R] GROUP PATH...]
           [-help [cmd]]
```

Questions?

Slides - http://trac.nchc.org.tw/cloud

Jazz Wang
Yao-Tsung Wang
jazz@nchc.org.tw

Powered by DRBL

MapReduce 簡介

Introduction to MapReduce

Jazz Wang

Yao-Tsung Wang

jazz@nchc.org.tw

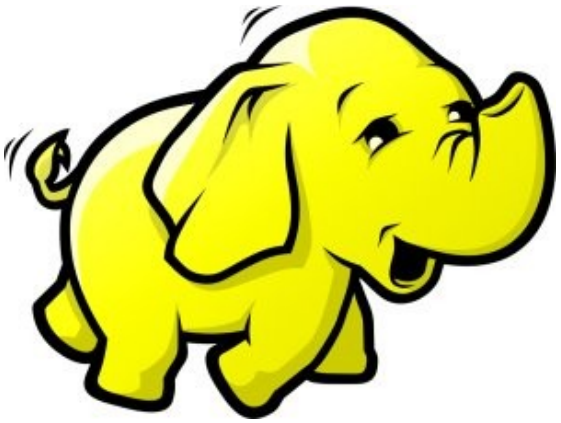

Divide and Conquer Algorithms

分而治之演算法

Example 1:

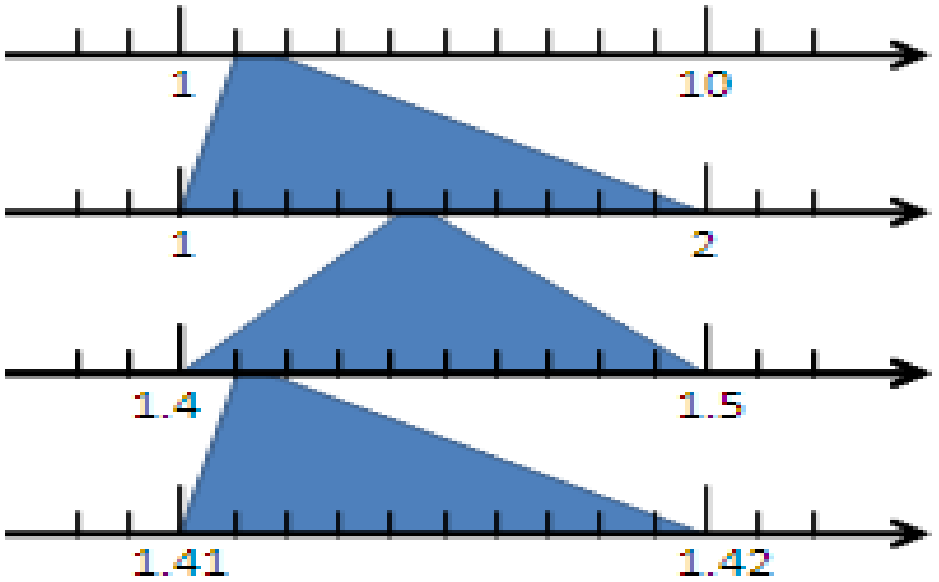

sqrt(2)

Example 2:

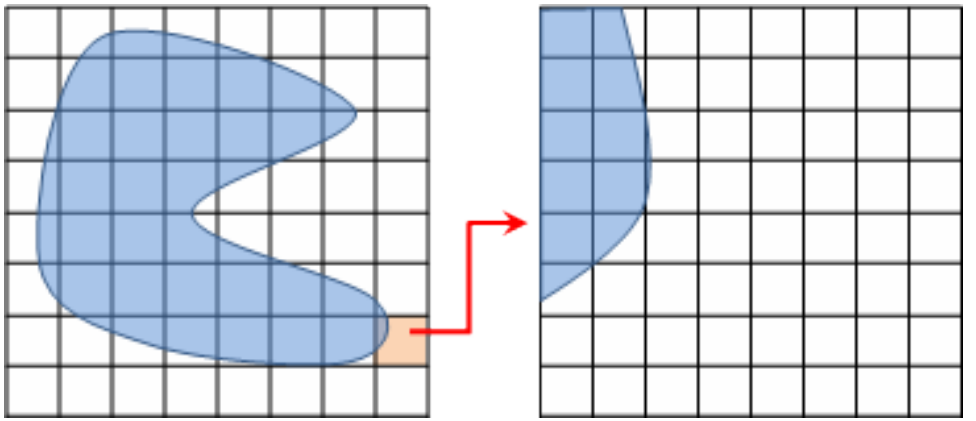

Example 3:

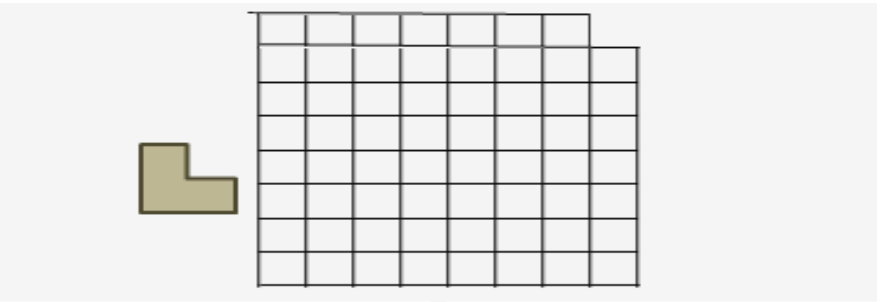

Example 4: The way to climb 5 steps stair within 2 steps each time. 眼前有五階樓梯，每次可踏上一階或踏上兩階，那麼爬完五階共有幾種踏法？

Ex : (1,1,1,1,1) or (1,2,1,1)

What is MapReduce ??
什麼是 MapReduce ??

- MapReduce 是 Google 申請的軟體專利，主要用來處理大量資料
- **MapReduce is a patented software framework introduced by Google to support distributed computing on large data sets on clusters of computers.**
- 啓發自函數編程中常用的 map 與 reduce 函數。
- **The framework is inspired by map and reduce functions commonly used in functional programming, although their purpose in the MapReduce framework is not the same as their original forms**
  - Map(...) : N → N
    - Ex. [1,2,3,4] – (*2) -> [2,4,6,8]
  - Reduce(...): N → 1
    - [1,2,3,4] - (sum) -> 10
- **Logical view of MapReduce**
    - Map(k1, v1) -> list(k2, v2)
    - Reduce(k2, list (v2)) -> list(k3, v3)

Source: http://en.wikipedia.org/wiki/MapReduce

Google's MapReduce Diagram

Google 的 MapReduce 圖解

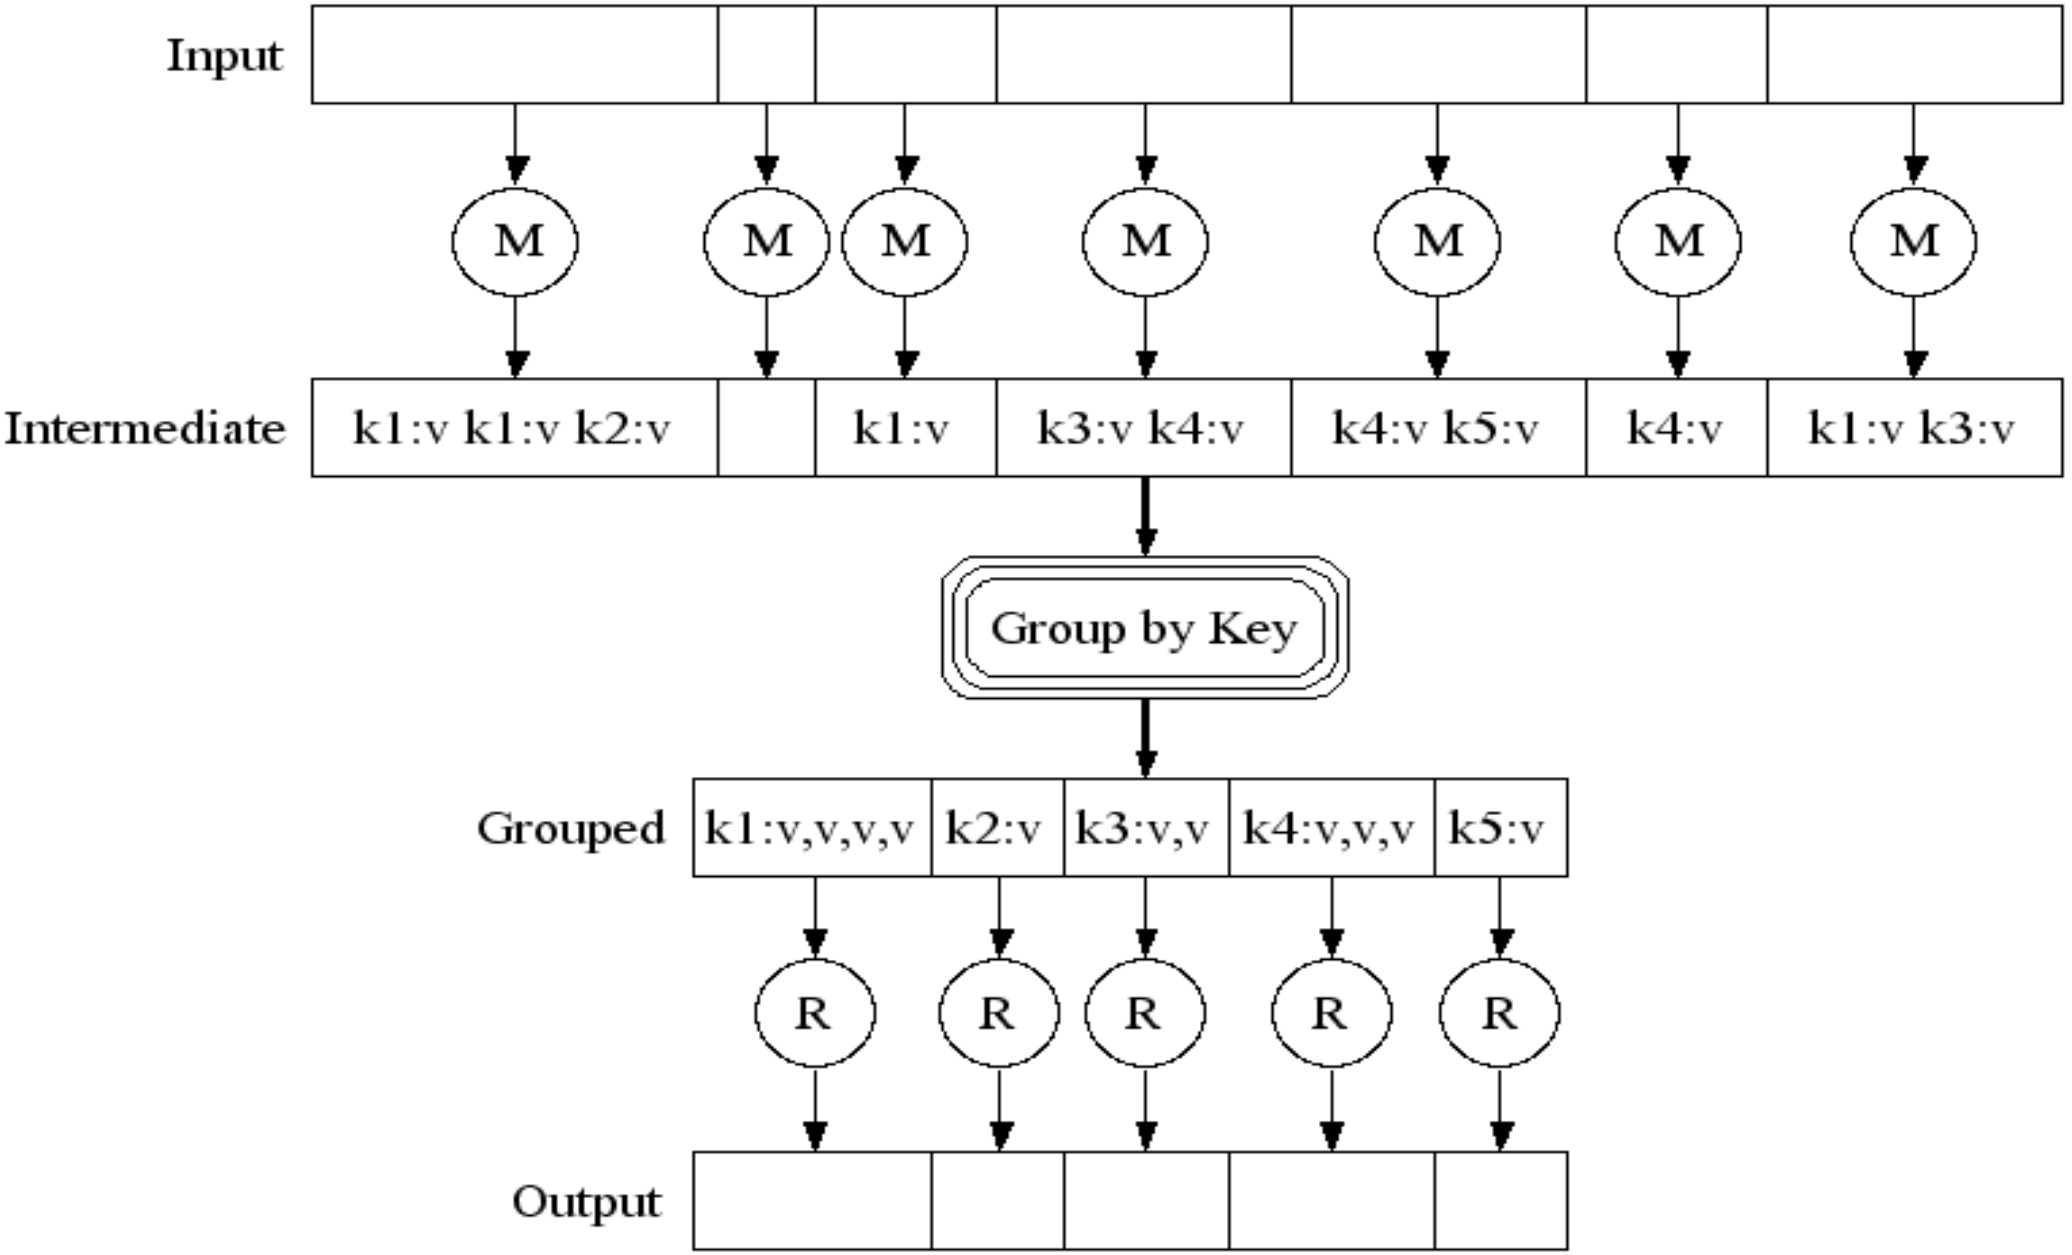

Google's MapReduce in Parallel

Google 的 MapReduce 平行版圖解

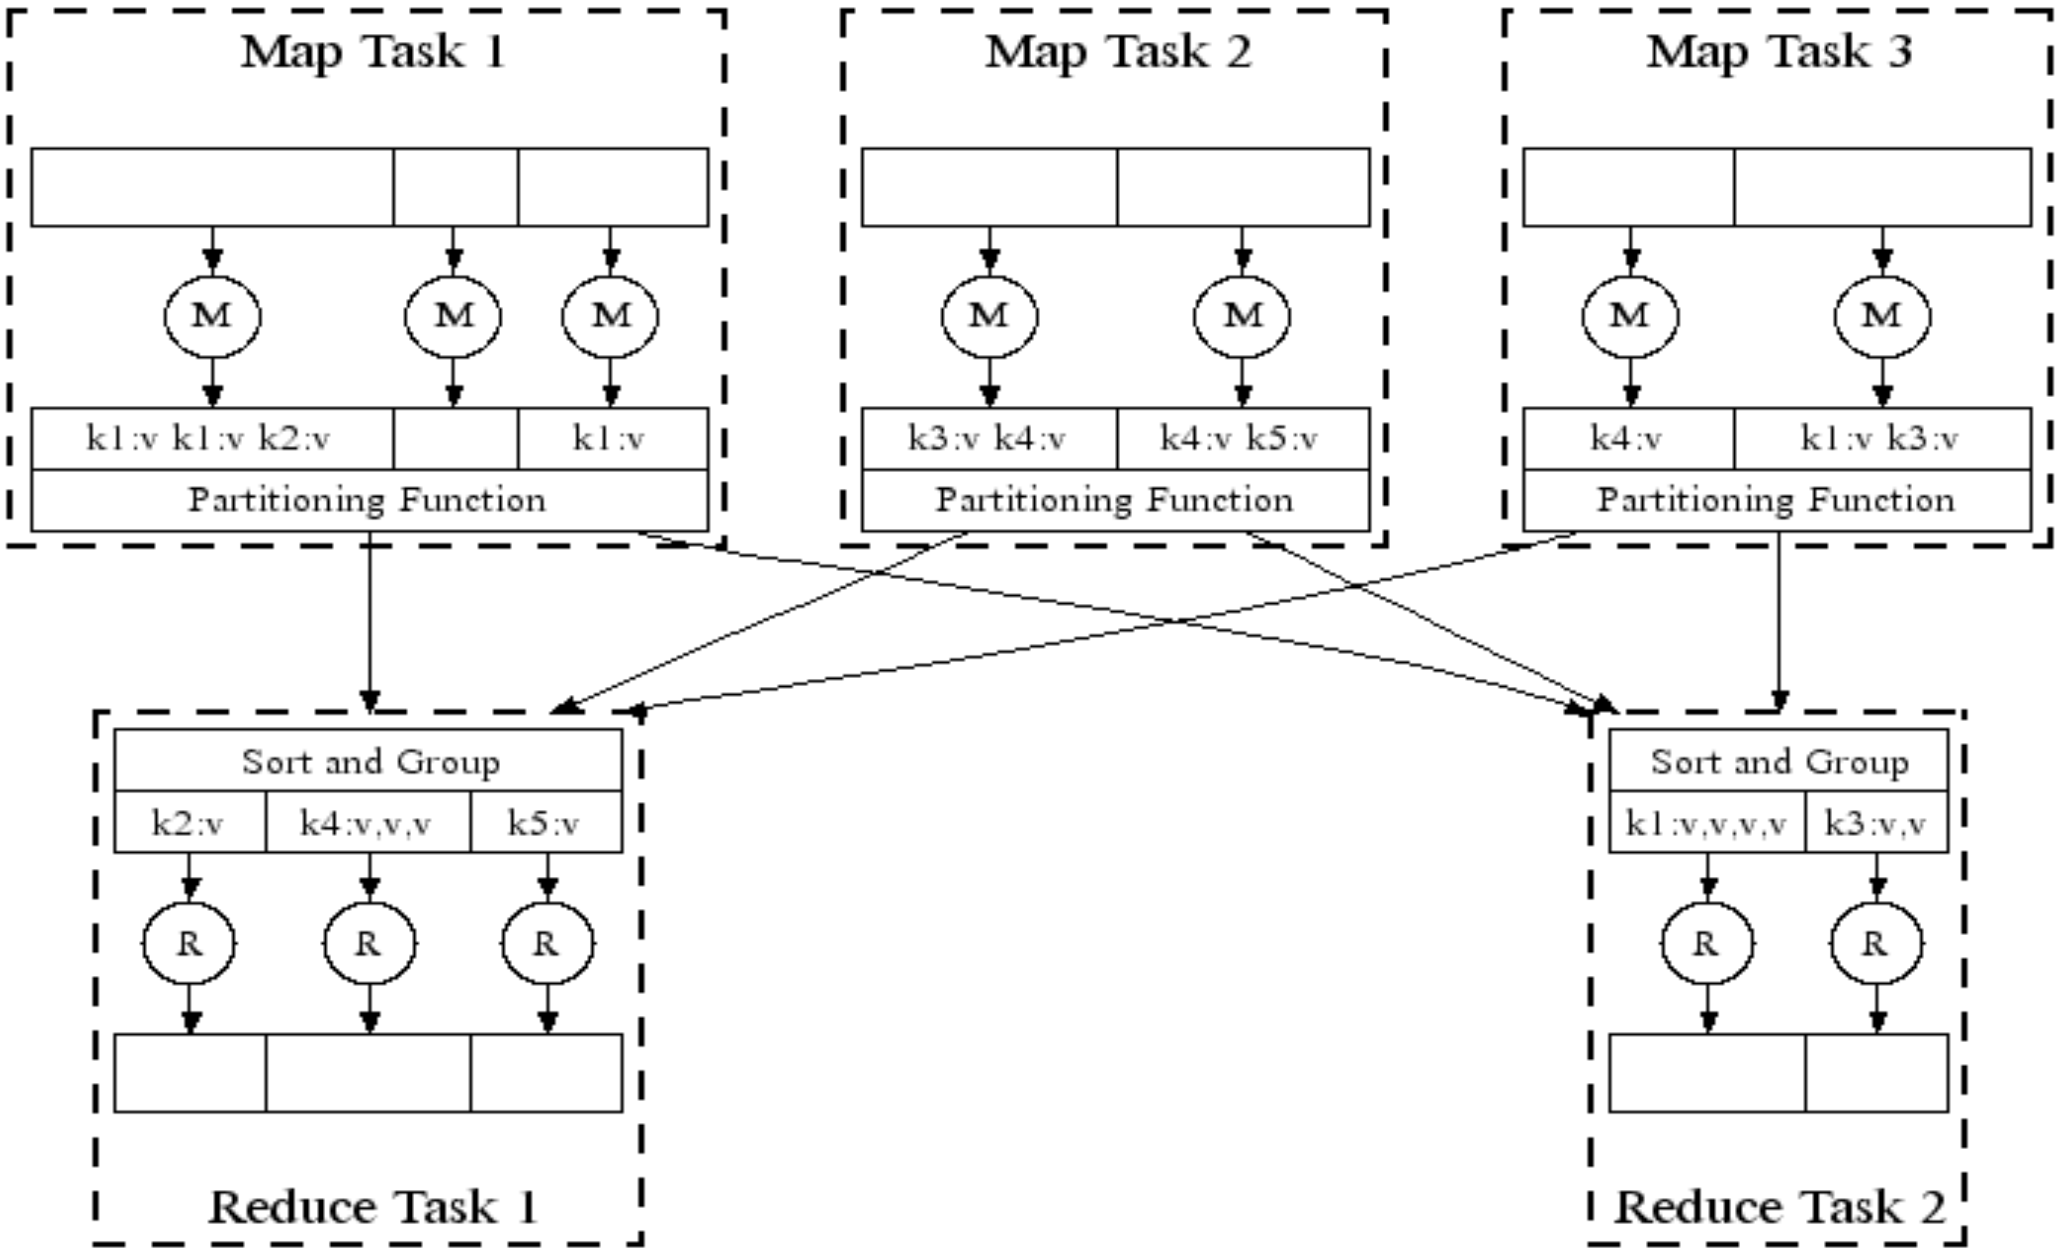

How does MapReduce work in Hadoop

Hadoop MapReduce 運作流程

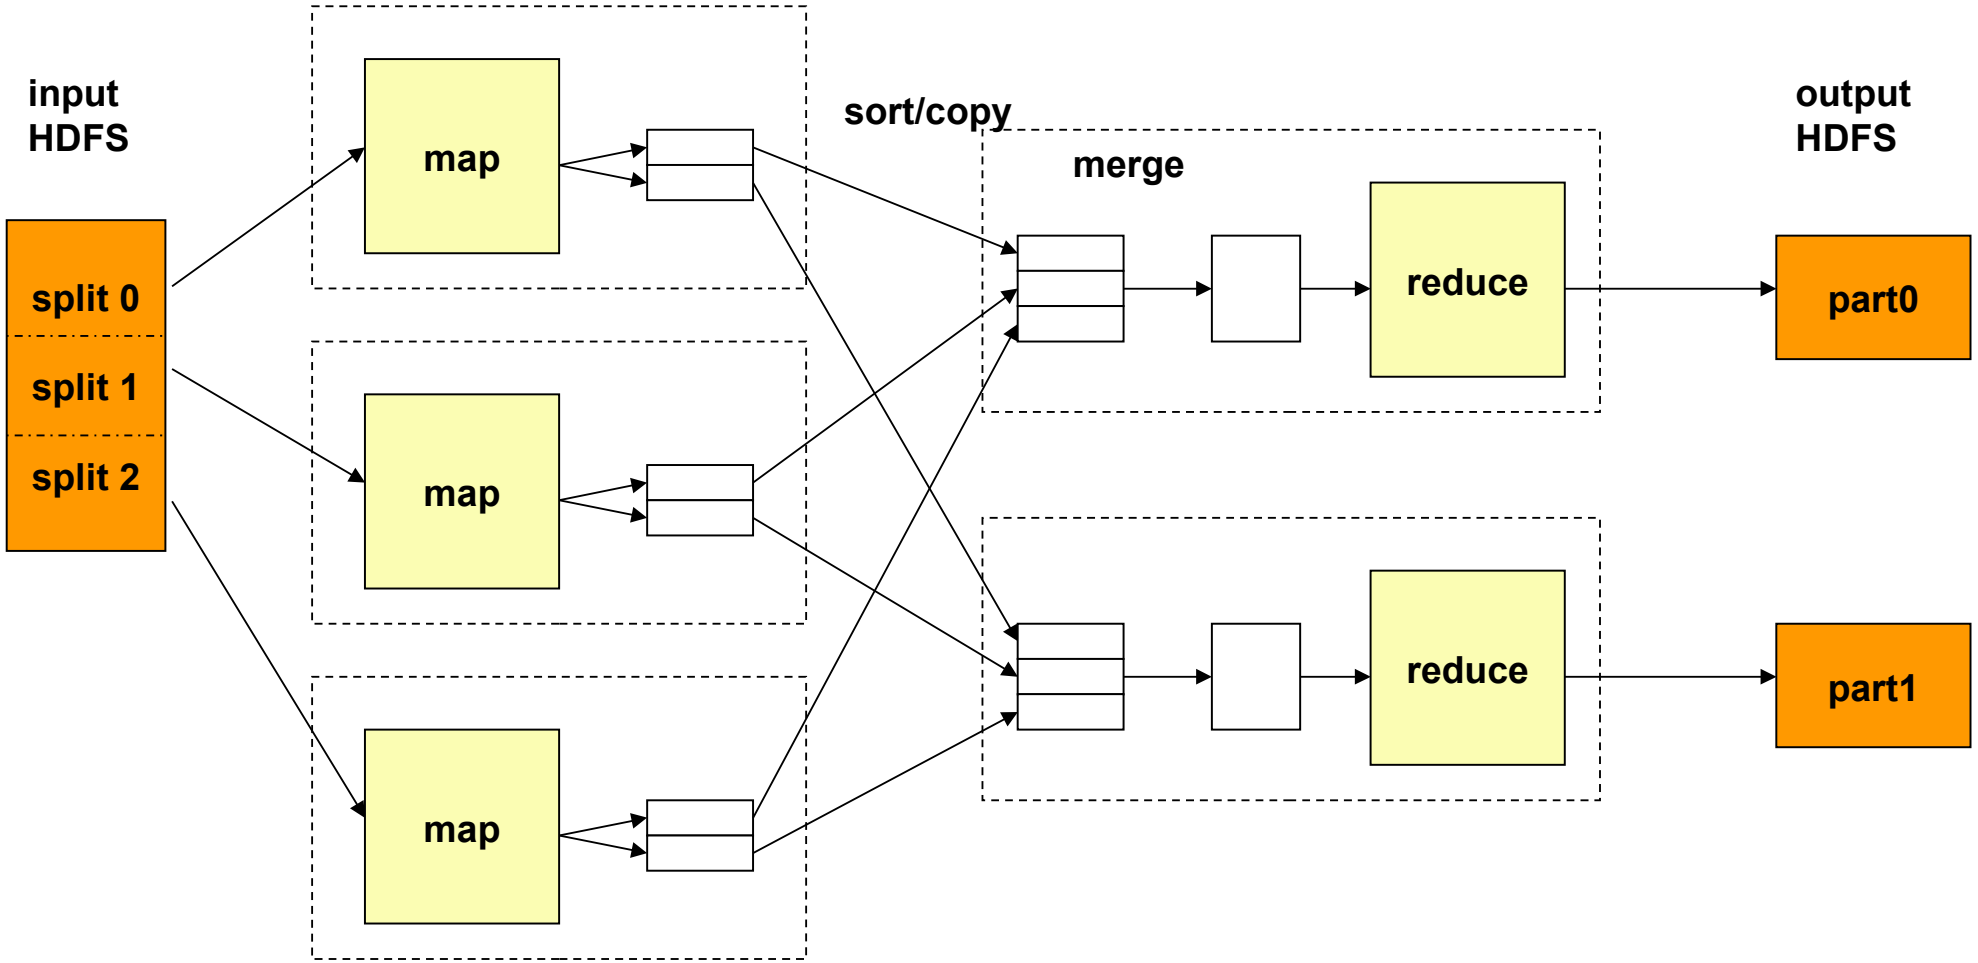

JobTracker 跟 NameNode 取得需要運算的 blocks

JobTracker 選數個 TaskTracker 來作 Map 運算，產生些中間檔案

JobTracker 將中間檔案整合排序後，複製到需要的 TaskTracker 去

JobTracker 派遣 TaskTracker 作 reduce

reduce 完後通知 JobTracker 與 Namenode 以產生 output

MapReduce by Example (1)

MapReduce 運作實例 (1)

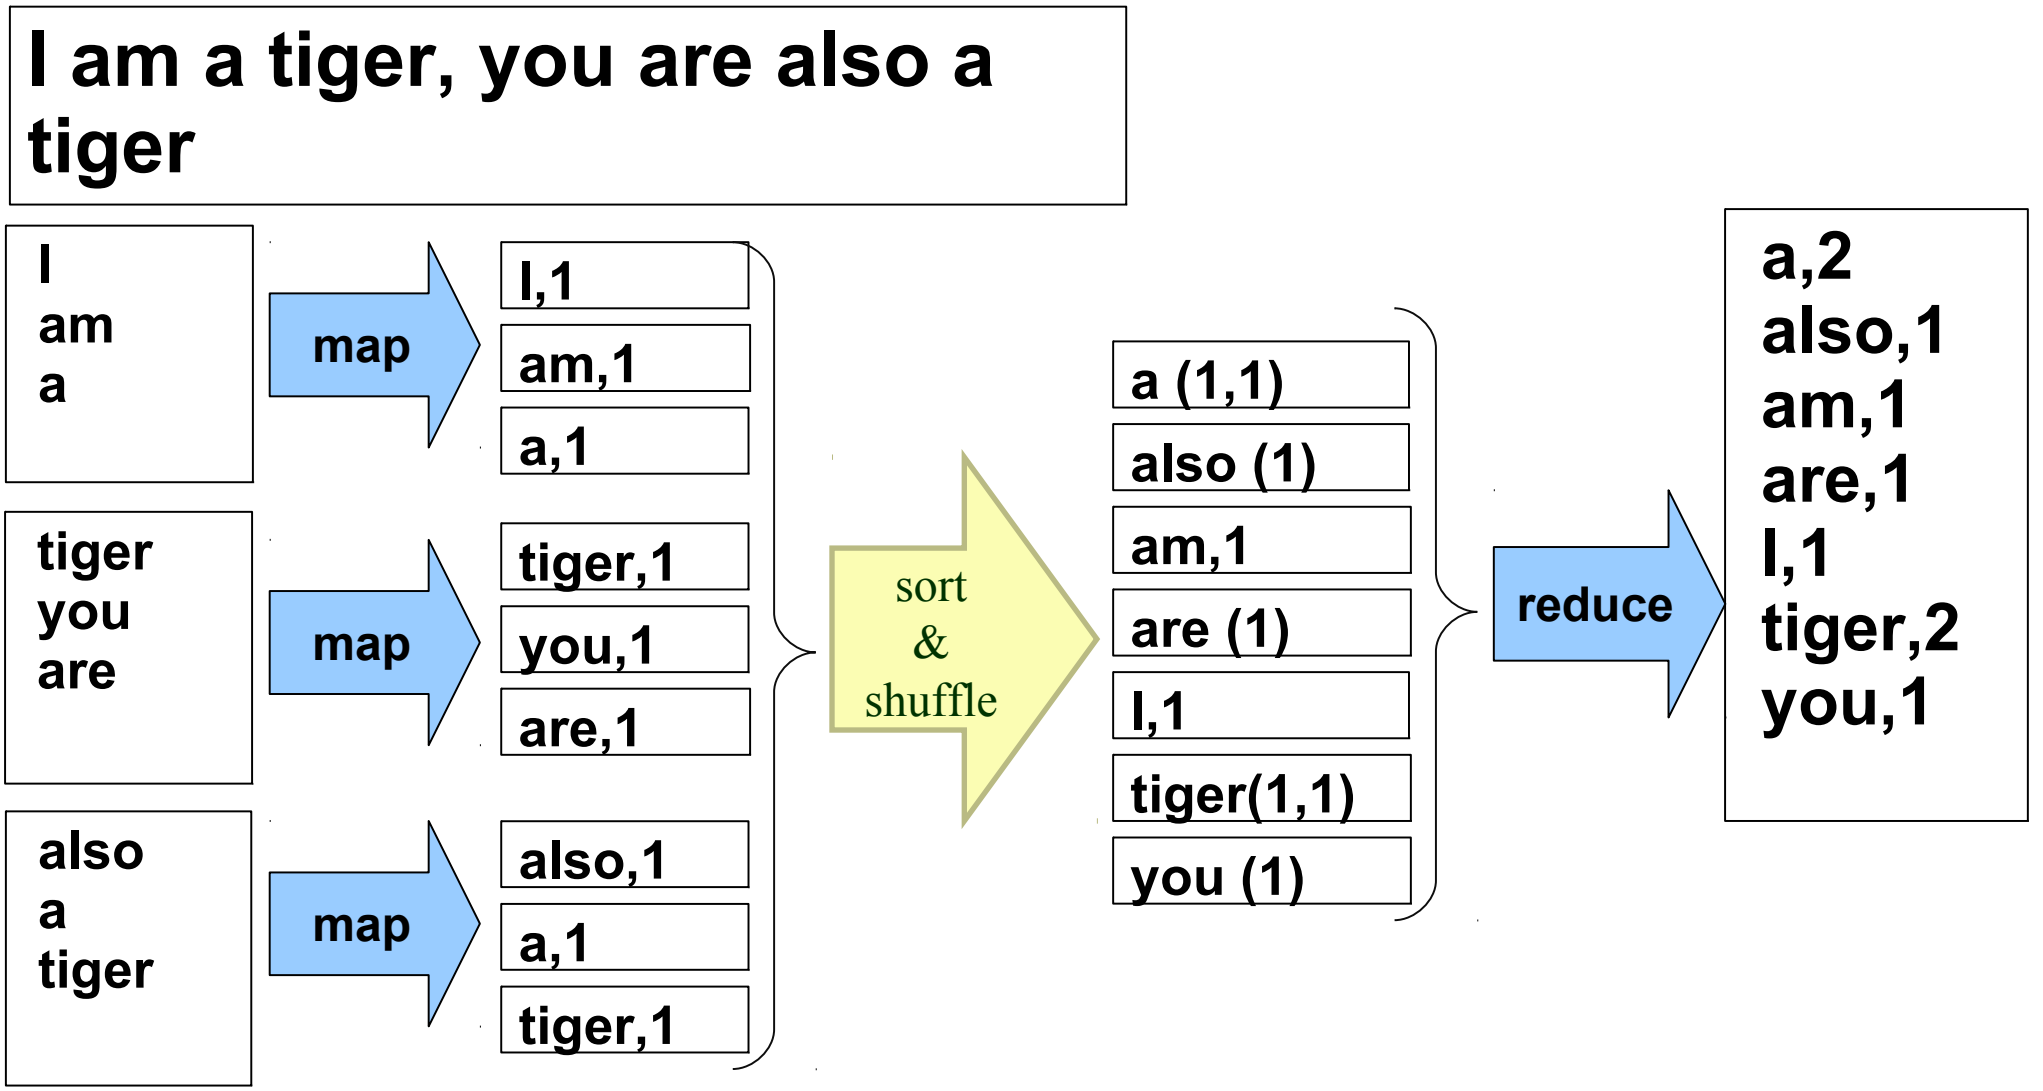

JobTracker 先選了三個 Tracker 做 map

Map 結束後，hadoop 進行中間資料的重組與排序

JobTracker 再選一個 TaskTracker 作 reduce

MapReduce by Example (2)

MapReduce 運作實例 (2)

$$\begin{bmatrix} a & b \\ c & d \end{bmatrix} \Rightarrow \begin{bmatrix} \text{sqrt}(a+b) \\ \text{sqrt}(c+d) \end{bmatrix}$$

$$\begin{bmatrix} 1.0 & 0.0 & 3.0 \\ 3.2 & 0.8 & 32.0 \\ 1.0 & 14.0 & 1.0 \end{bmatrix} \Rightarrow ?$$

```
(0,sqrt(1.0 +  0.0 +  3.0))
(1,sqrt(3.2 +  0.8 + 32.0))
(2,sqrt(1.0 + 14.0 +  1.0))
```

Input File

```
0 0 1.0   // A[0][1] = 1.0
0 1 0.0   // A[0][1] = 0.0
0 2 3.0   // A[0][2] = 3.0
1 0 3.2   // A[1][0] = 3.2
1 1 0.8   // A[1][1] = 0.8
```

```
1 2 32.0 // A[1][2] = 32.0
2 0 1.0   // A[2][0] = 1.0
2 1 14.0 // A[2][1] = 14.0
2 2 1.0   // A[2][2] = 1.0
```

map

```
(0,1.0)
(0,0.0)
(0,3.0)
(1,3.2)
(1,0.8)
```

map

```
(1,32.0)
(2,1.0)
(2,14.0)
(2,1.0)
```

sort / merge

```
(0,{1.0,0.0,3.0})
(1,{3.2,0.8,32.0})
(2,{1.0,14.0,1.0})
```

reduce

MapReduce is suitable to ....
MapReduce 合適用於 ....

- 大規模資料集
- **Large Data Set**
- 可拆解
- **Parallelization**

- Text tokenization
- Indexing and Search
- Data mining
- machine learning
- …

- http://www.dbms2.com/2008/08/26/known-applications-of-mapreduce/
- http://wiki.apache.org/hadoop/PoweredBy

MapReduce 程式設計入門

MapReduce Programing 101

Jazz Wang

Yao-Tsung Wang

jazz@nchc.org.tw

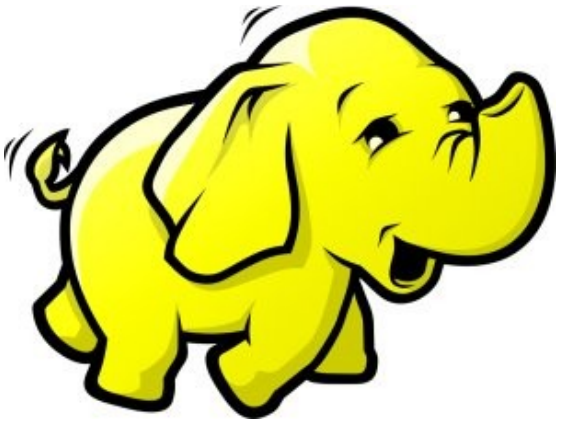

Program Prototype (v 0.20)

Map 區

Reduce 區

設定區

```
Class MR{
    static public Class Mapper …{
    }
    static public Class Reducer …{
    }
    main(){
        Configuration conf = new Configuration();
        Job job = new Job(conf, “job name");
        job.setJarByClass(thisMainClass.class);
        job.setMapperClass(Mapper.class);
        job.setReduceClass(Reducer.class);
        FileInputFormat.addInputPaths(job, new Path(args[0]));
        FileOutputFormat.setOutputPath(job, new Path(args[1]));
        job.waitForCompletion(true);
}}
```

Mapper 程式碼

Reducer 程式碼

Other configure 其他的設定參數程式碼

Program Prototype (v 0.18)

Map 區

Reduce 區

設定區

```
Class MR{
    static public Class Mapper …{
    }
    static public Class Reducer …{
    }
    main(){
        JobConf conf = new JobConf( MR.class );
        conf.setMapperClass(Mapper.class);
        conf.setReduceClass(Reducer.class);
        FileInputFormat.setInputPaths(conf, new Path(args[0]));
        FileOutputFormat.setOutputPath(conf, new Path(args[1]));
        JobClient.runJob(conf);
}}
```

Map 程式碼

Reduce 程式碼

Other configure 其他的設定參數程式碼

Word Count - mapper

```
1  class MyMapper extends Mapper<LongWritable, Text, Text, IntWritable> {
       private final static IntWritable one = new IntWritable(1);
2      private Text word = new Text();
3      public void map( LongWritable key, Text value, Context context)
4      throws IOException , InterruptedException {
           String line = ((Text) value).toString();
5          StringTokenizer itr = new StringTokenizer(line);
6          while (itr.hasMoreTokens()) {
7              word.set(itr.nextToken());
8              context.write(word, one);
9  }}}
```

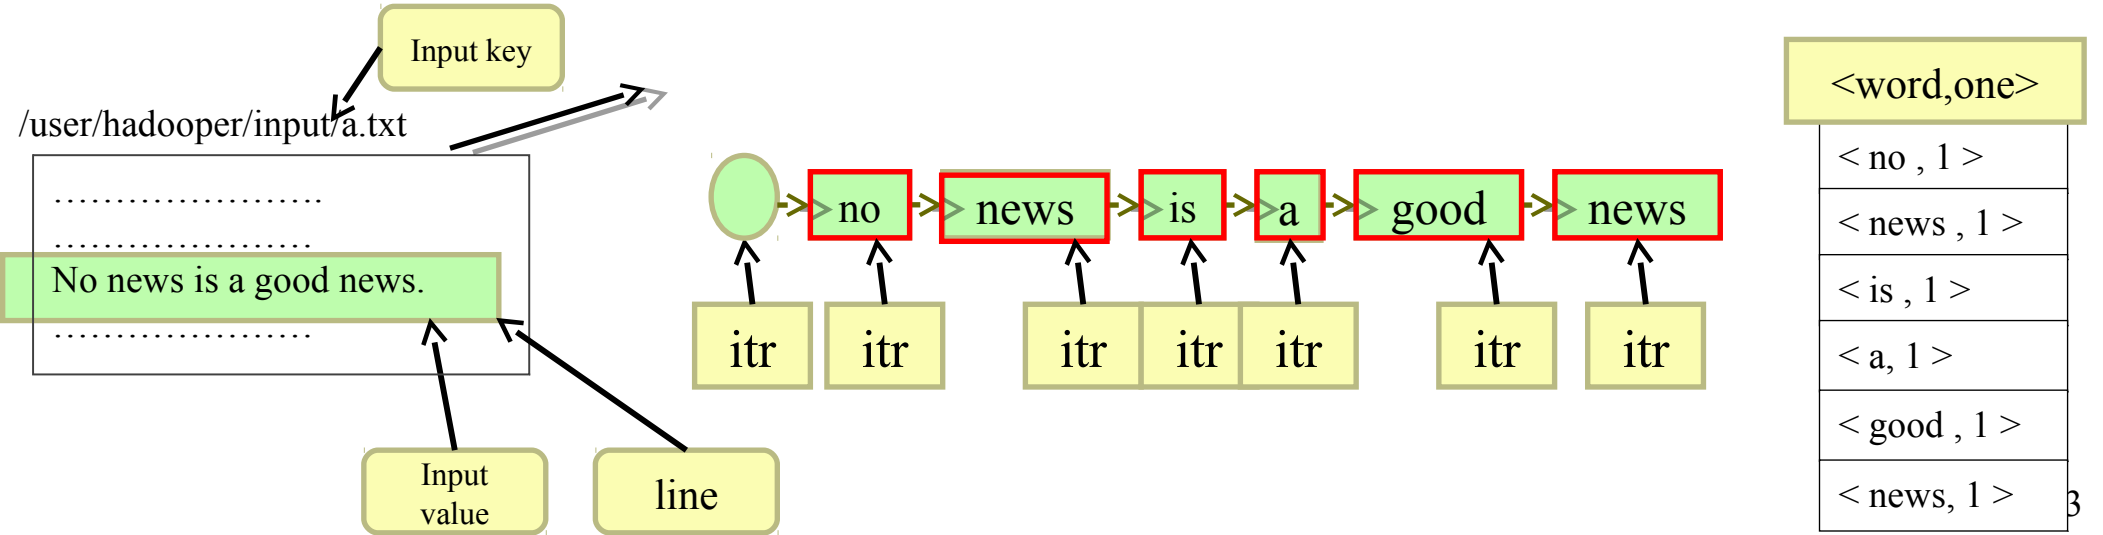

Word Count - reducer

```
1  class MyReducer extends Reducer< Text, IntWritable, Text, IntWritable> {
2          IntWritable result = new IntWritable();
3          public void reduce( Text key, Iterable <IntWritable> values, Context context)
           throws IOException, InterruptedException {
4                  int sum = 0;
5                  for ( IntWritable val : values )
6                  sum += val.get();
7                  result.set(sum);
8                  context.write ( key, result);
   }}
```

```
for ( int i ; i < values.length ; i ++ ){
  sum += values[i].get()
}
```

<word,one>
< a, 1 >
< good, 1 >
< is, 1 >
< news, 1→1 >
< no, 1 >







<key,SunValue>
< news , 2 >

Word Count – main program

```
Class WordCount{
    main()
        Configuration conf = new Configuration();
        Job job = new Job(conf, “job name” );
        job.setJarByClass(thisMainClass.class);
        job.setMapperClass(MyMapper.class);
        job.setReduceClass(MyReducer.class);
        FileInputFormat.addInputPaths(job, new Path(args[0]));
        FileOutputFormat.setOutputPath(job, new Path(args[1]));
        job.waitForCompletion(true);
}}
```

Questions?

Slides - http://trac.nchc.org.tw/cloud

Jazz Wang
Yao-Tsung Wang
jazz@nchc.org.tw

Powered by DRBL

Hadoop 叢集設定解說

Setup Hadoop Fully Distributed Mode

Jazz Wang

Yao-Tsung Wang

jazz@nchc.org.tw

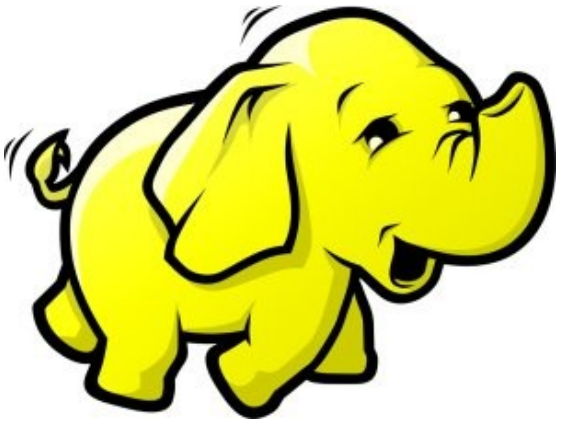

Yahoo's Hadoop Cluster
雅虎的大象軍團

- ~10,000 machines running Hadoop in US
- The largest cluster is currently 2000 nodes
- Nearly 1 petabyte of user data (compressed, unreplicated)
- Running roughly 10,000 research jobs / week

Hadoop Pseudo-Distributed Mode
我們已經實作過單機模式

- Step 1: Setup SSH key exchange
- Step 2. Install Java
- Step 3: Download Hadoop Source Package
- Step 4: Configure hadoop-env.sh
  - export JAVA_HOME=/usr/lib/jvm/java-6-sun
- Step 5: Configure *-site.xml
  - Set Namenode to hdfs://localhost:9000
  - Set Jobtracker to localhost:9001
  - bin/hadoop namenode -format
- Step 6: Format HDFS
- Step 7: Start Hadoop
  - bin/start-all.sh
- Step 8: Complete!! Let's check the status of Hadoop
  - Job admin http://localhost:50030/ HDFS http://localhost:50070/

Diagram of Pseudo-Distributed Mode

Hadoop 單機環境示意圖

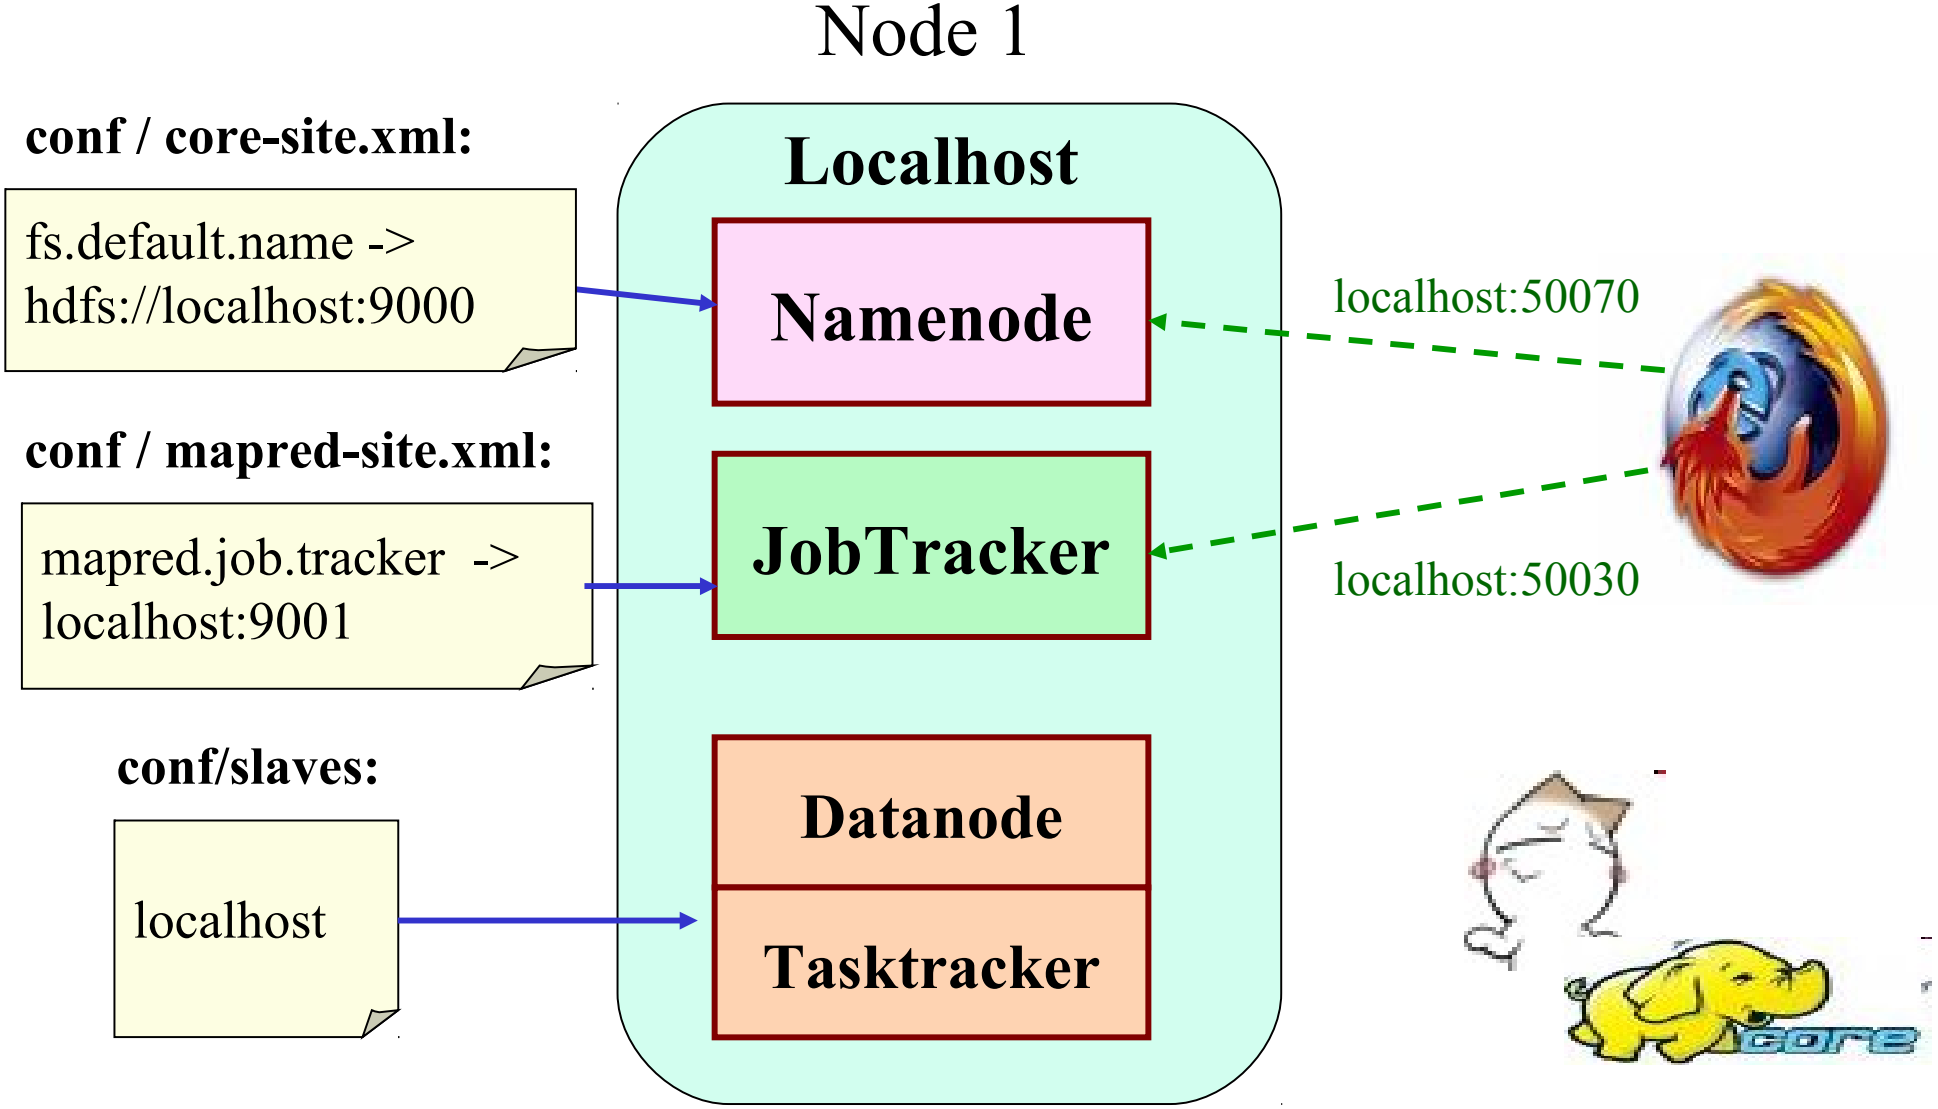

Hadoop Fully-Distributed Mode
我們接著要用兩台電腦實作叢集模式

- Step 1: Setup SSH key exchange
- Step 2. Install Java
- Step 3: Download Hadoop Source Package
- Step 4: Configure hadoop-env.sh
  - export JAVA_HOME=/usr/lib/jvm/java-6-sun
- Step 5: Configure *-site.xml
  - Set Namenode to hdfs://x.x.x.1:9000
  - Set Jobtracker to x.x.x.2:9001
- Step 6: Configure Slaves
- Step 7: Syncronization of all slaves
- Step 8: Format HDFS
  - bin/hadoop namenode -format
- Step 9: Start Hadoop
  - On NameNode： bin/start-dfs.sh
  - On JobTracker： bin/start-mapred.sh
- Step 10: Complete!! Let's check the status of Hadoop
  - Job admin http://x.x.x.2:50030/ HDFS http://x.x.x.1:50070/

Use case #1
設定情境一

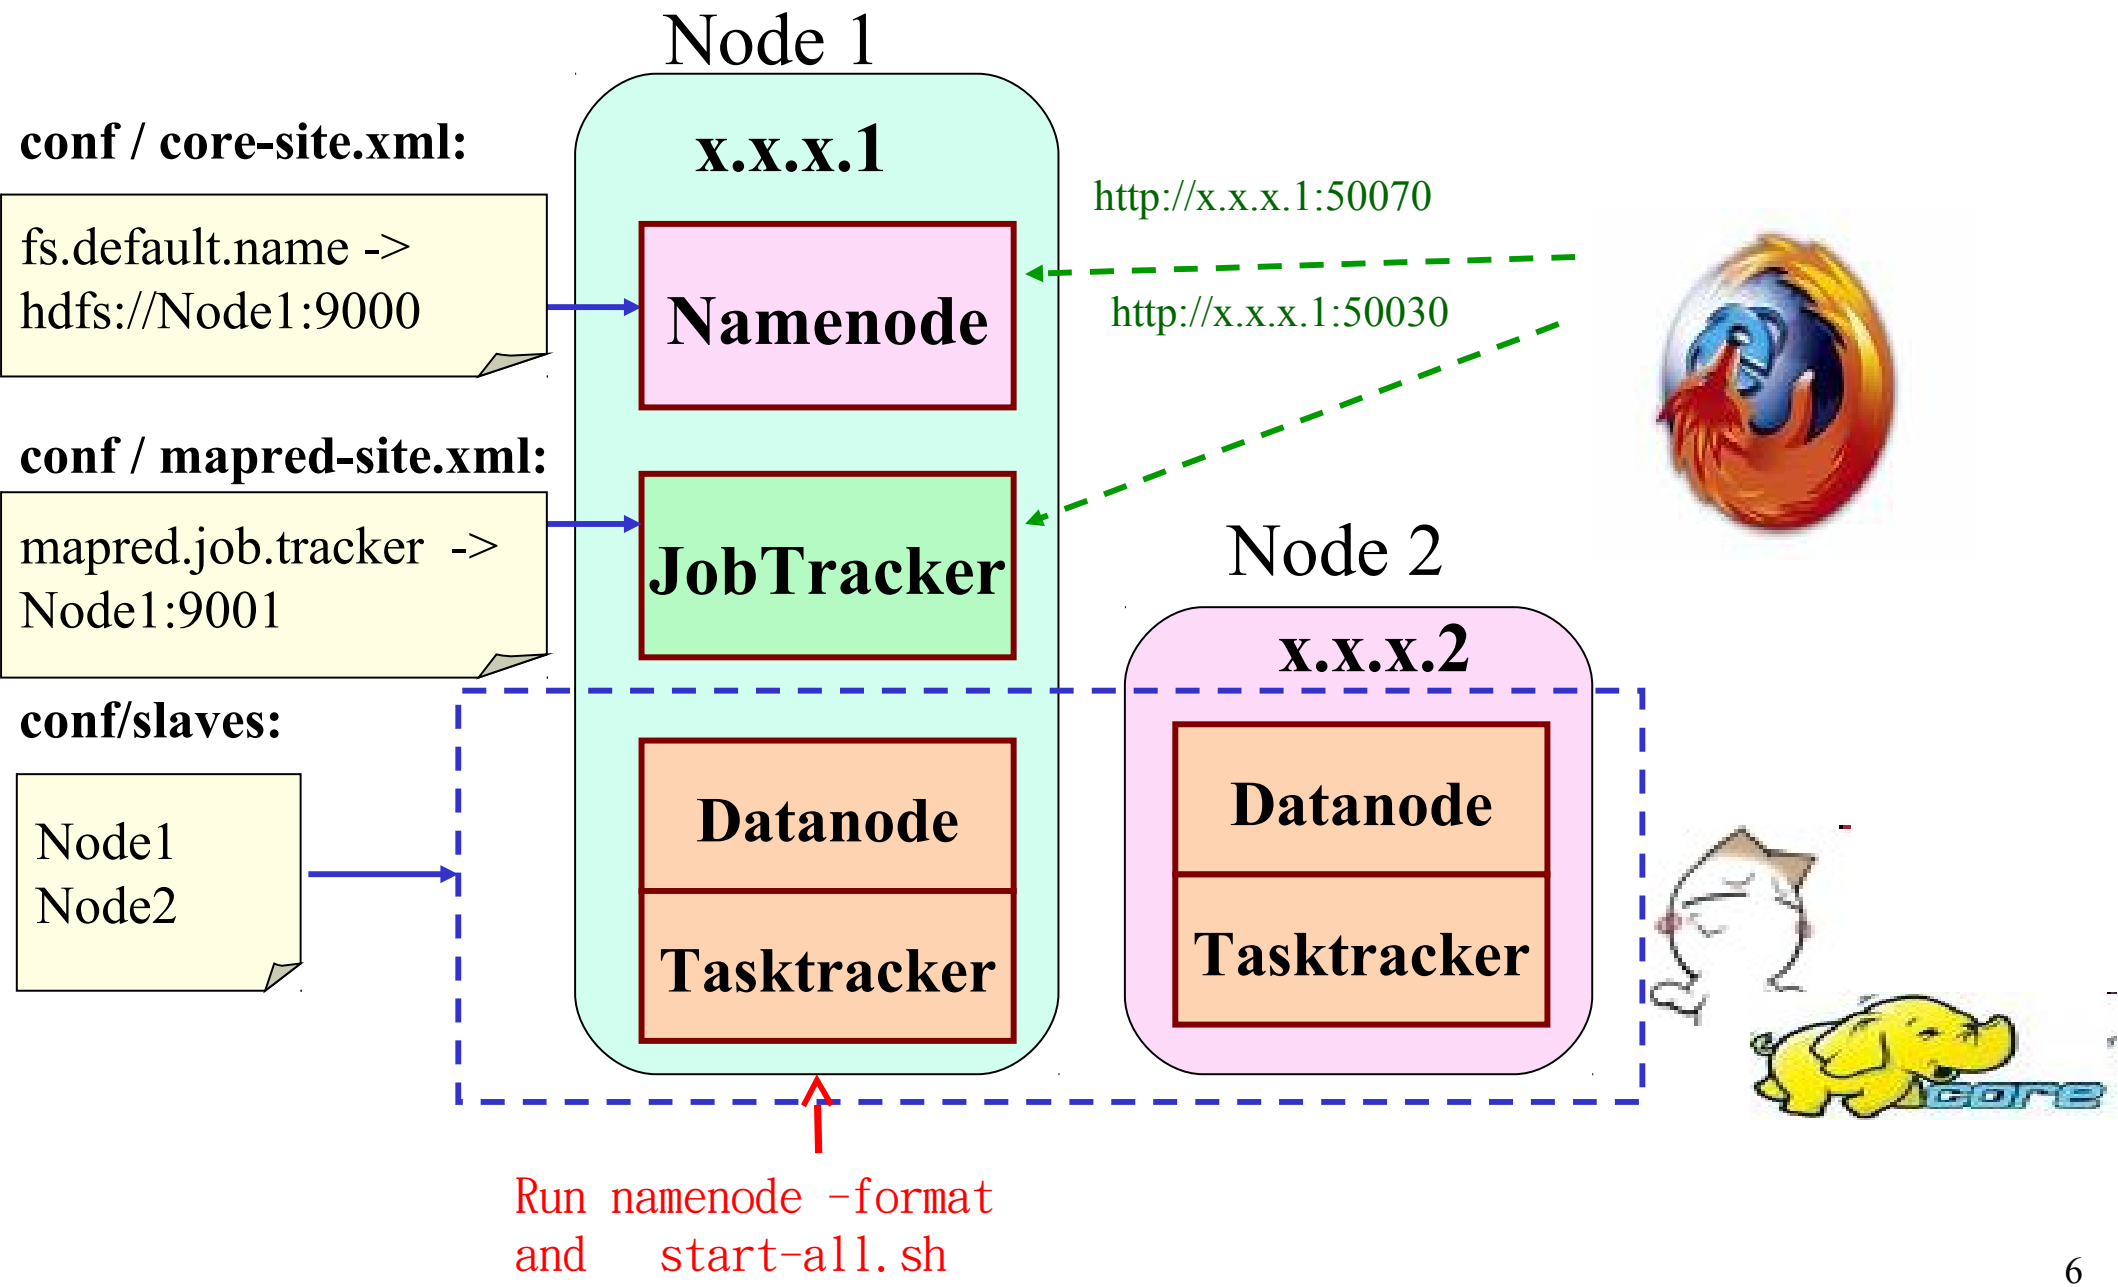

Use case #2
設定情境二

Node 1

Node 2

conf / core-site.xml:

fs.default.name -> hdfs://Node1:9000

conf / mapred-site.xml:

mapred.job.tracker -> Node2:9001

conf/slaves:

Node1
Node2

x.x.x.1

Namenode

Datanode

Tasktracker

x.x.x.2

JobTracker

Datanode

Tasktracker

http://x.x.x.1:50070

http://x.x.x.2:50030

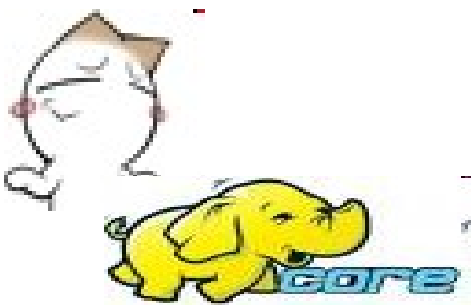

Run namenode -format and start-dfs.sh

run start-mapred.sh

Use case #3
設定情境三

conf / core-site.xml:

fs.default.name ->
hdfs://Node1:9000

conf / mapred-site.xml:

mapred.job.tracker ->
Node1:9001

conf/slaves:

Node2
…..
NodeN

Node 1

x.x.x.1

Namenode

JobTracker

http://x.x.x.1:50070

http://x.x.x.1:50030

Node 2

x.x.x.2

Datanode

Tasktracker

…

Node N

x.x.x.n

Datanode

Tasktracker

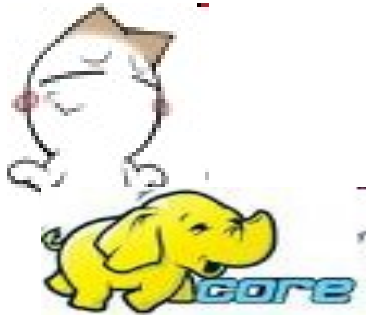

Use case #4
設定情境四

conf / core-site.xml:

fs.default.name -> hdfs://Node1:9000

conf / mapred-site.xml:

mapred.job.tracker -> Node2:9001

conf/slaves:

Node3
…..
NodeN

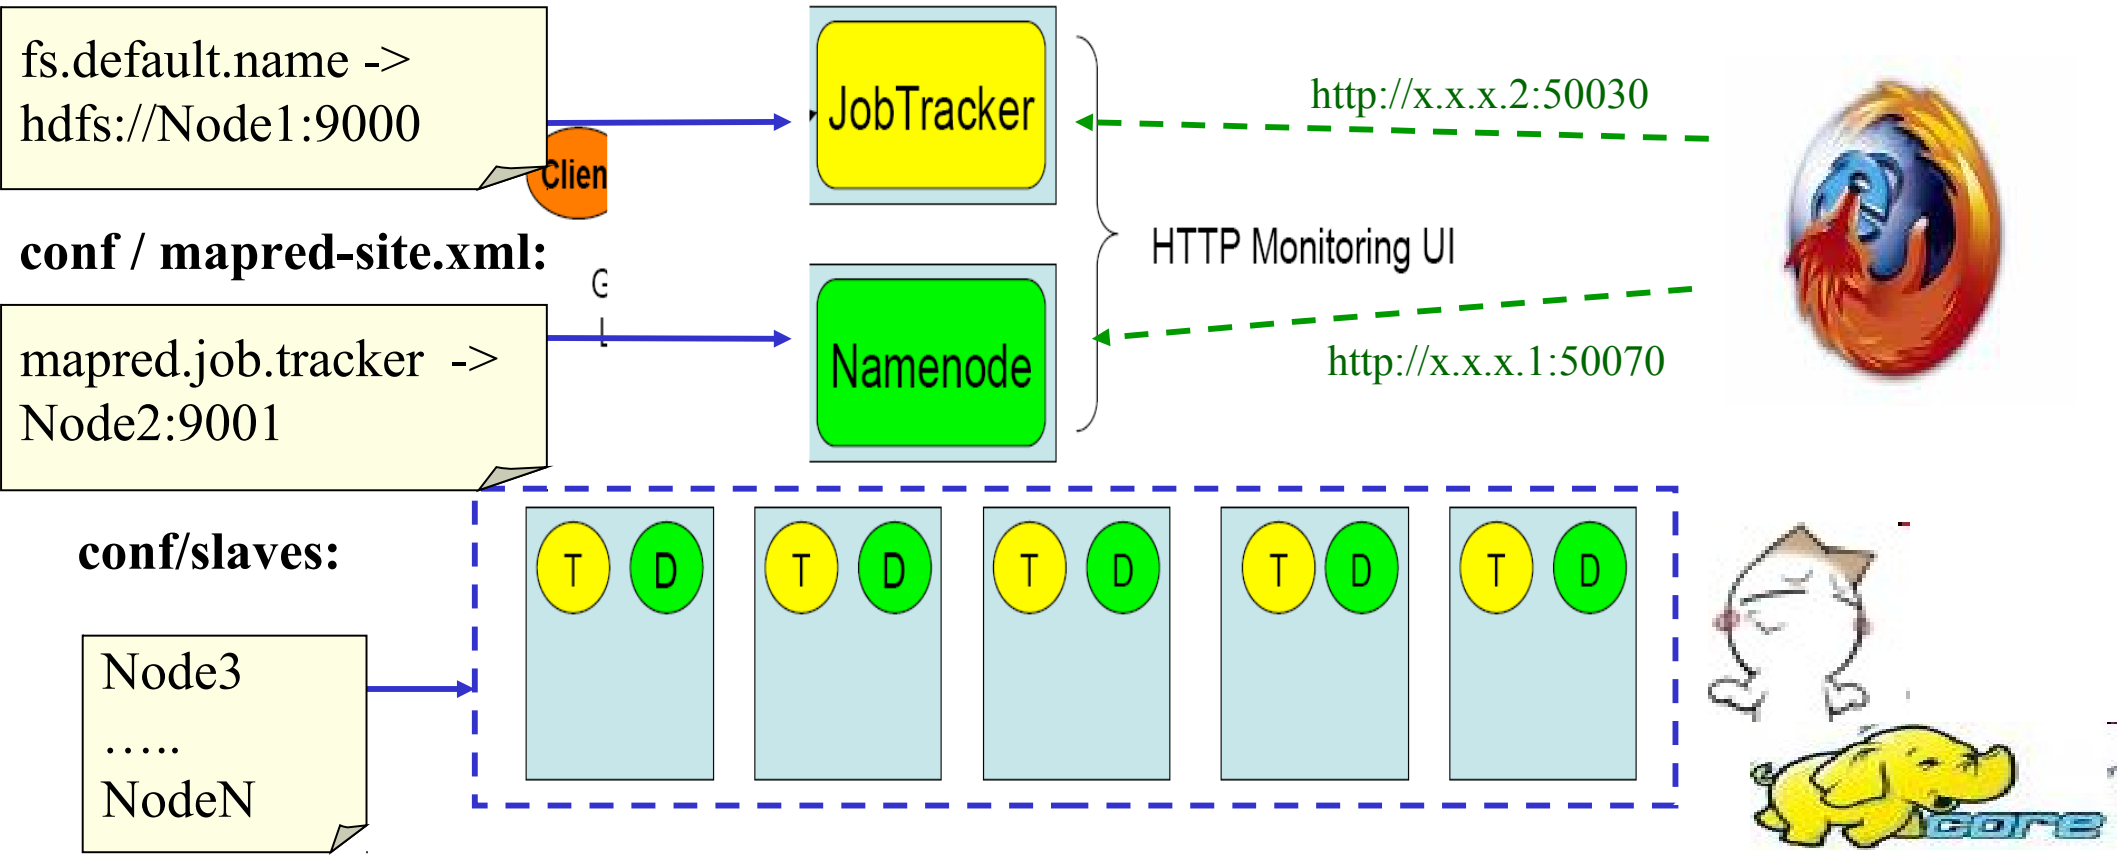

Hadoop 叢集佈署工具

Hadoop Deployment Tool : SmartFog and DRBL

Jazz Wang

Yao-Tsung Wang

jazz@nchc.org.tw

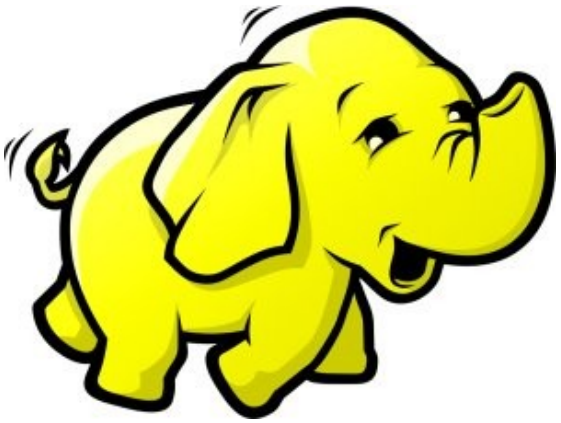

Programmer v.s. System Admin.

Source:http://www.funnyjunksite.com/wp-content/uploads/2007/08/programmer.jpg

Source:
http://www.sysadminday.com/images/people/136-3697.JPG

PART 1 :

PC Cluster 101

Jazz Wang
Yao-Tsung Wang
jazz@nchc.org.tw

Powered by DRBL

At First, We have “ 4 + 1 ” PC Cluster

It’d better be

2^n

Manage

Scheduler

Then, We connect 5 PCs with Gigabit Ethernet Switch

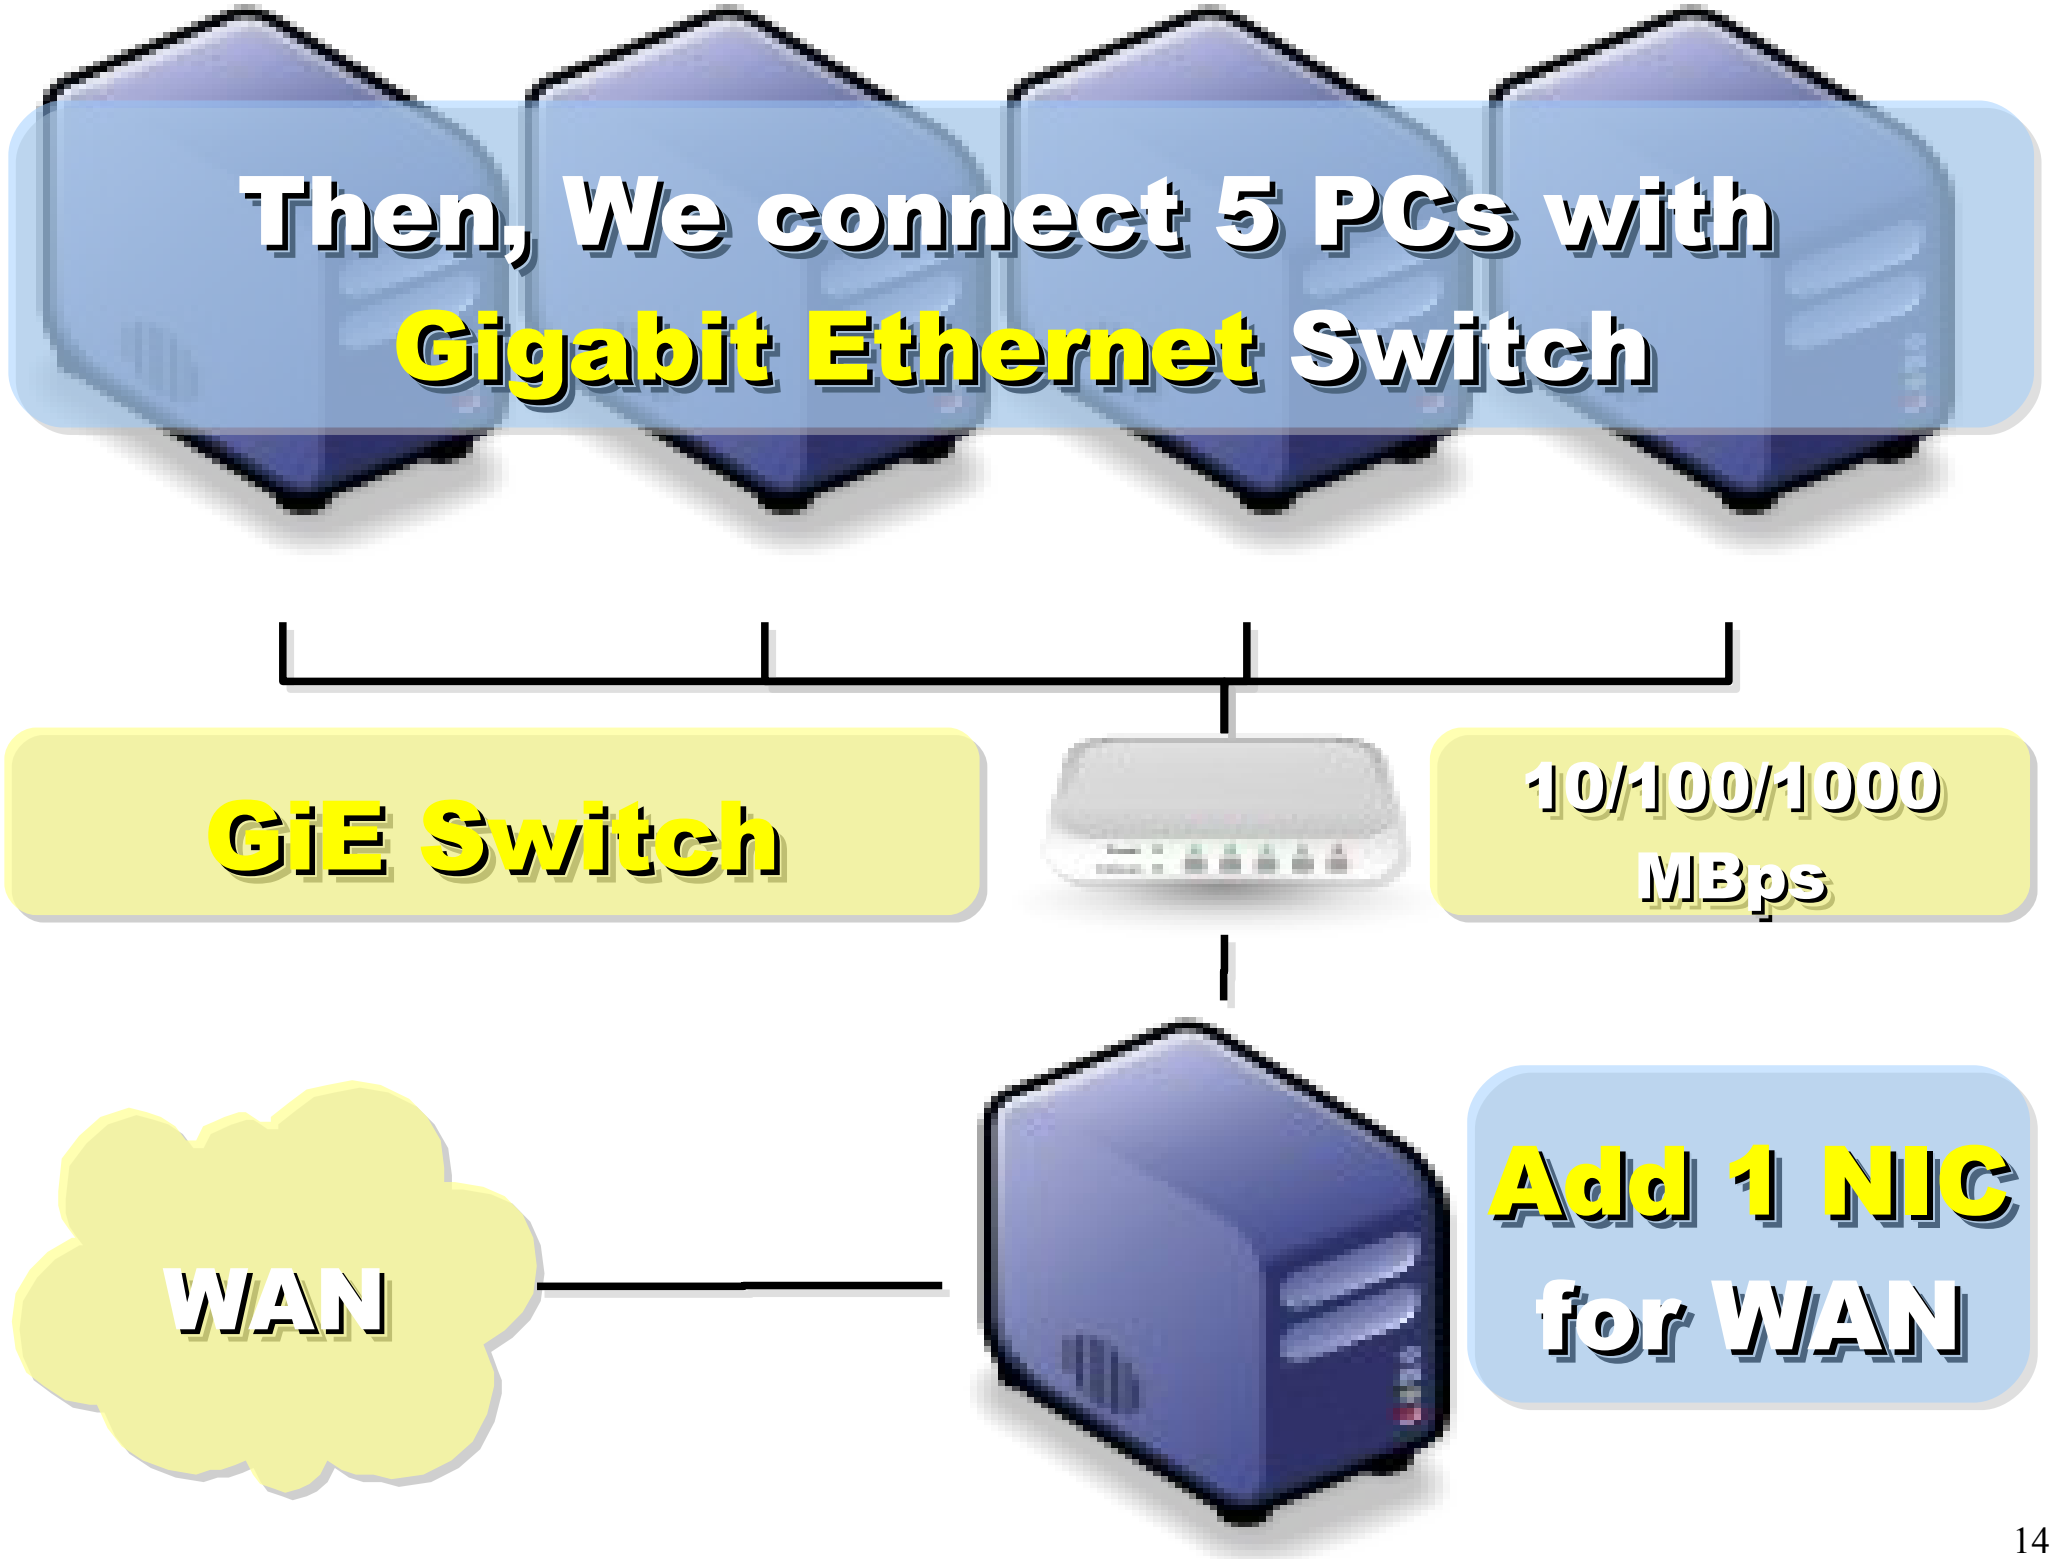

Compute Nodes

4 Compute Nodes will communicate via LAN Switch. Only Manage Node have Internet Access for Security!

WAN

Manage Node

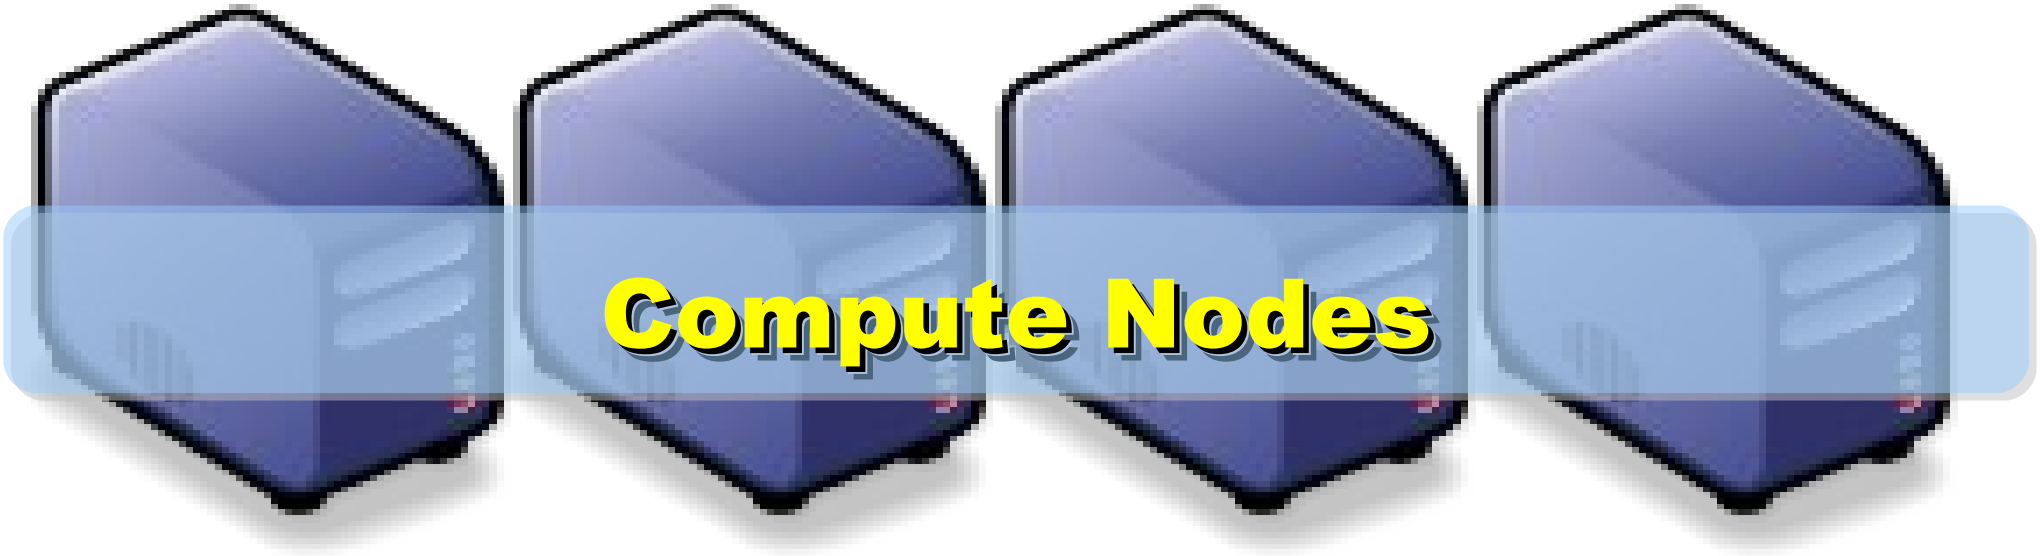

Basic System Setup for Cluster

Messaging

Account Mgnt.

MPICH

SSHD

NIS

YP

GCC

GNU Libc

Bash

Perl

Kernel Module

Linux Kernel

Boot Loader

On Manage Node,
We need to install Scheduler and Network File System for sharing Files with Compute Node

Job Mgnt.

OpenPBS

File Sharing

NFS

Extra

Messaging

MPICH

Account Mgnt.

SSHD

NIS

YP

GCC

GNU Libc

Bash

Perl

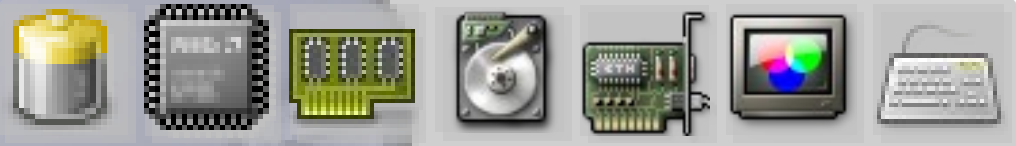

Kernel Module

Linux Kernel

Boot Loader

Challenges of Cluster Computing

- **Hardware**
  - Ethernet Speed / PC Density
  - Power / Cooling / Heat
  - Network and Storage Architecture
- **Software**
  - Job Scheduler (Cluster level)
  - Account Management
  - File Sharing / Package Management
- **Limitation**
  - Shared Memory
  - Global Memory Management

Common Method to deploy Cluster

1. Setup one **Template** machine

2. Cloning to multiple machine

3. Configure Settings

↓

4. Install **Job Scheduler**

↓

5. Running **Benchmark**

Challenges of Common Method

Add New User Account ?

Upgrade Software ?

How to share user data ?

Configuration Syncronization

How to deploy 4000+ Nodes ????

資料標題：Scaling Hadoop to 4000 nodes at Yahoo!

資料日期：September 30, 2008

Total Nodes	**4000**
Total cores	**30000**
Data	**16PB**

	500-node cluster		4000-node cluster	
	write	**read**	**write**	**read**
number of files	990	990	14,000	14,000
file size (MB)	320	320	360	360
total MB processes	316,800	316,800	5,040,000	5,040,000
tasks per node	2	2	4	4
avg. throughput (MB/s)	**5.8**	**18**	**40**	**66**

Advanced Methods to deploy Cluster

- SSI (Single System Image)
  - Multiple PCs as Single Computing Resources
  - Image-based
    - homogeneous
    - ex. SystemImager, OSCAR, Kadeploy
  - Package-based
    - heterogeneous
    - easy update and modify packages
    - ex. FAI, DRBL
- Other deploy tools
  - Rocks : RPM only
  - cfengine : configuration engine

Comparison of Cluster Deploy Tools

	Distribution	Support Diskless/ Sysmless	Type	Node configuration tools	Cluster management tools	Database installation
System Imager	ALL	Yes	Image	Yes	No	No
OSCAR	RPM-based	Yes	Image	Yes	Yes	No
Kadeploy	ALL	No	Image	Yes	Yes	Yes
DRBL	ALL	Yes	Package	Yes	Yes	No
FAI	Debian-Based	Yes	Package	Yes	No	No

PART 2-1 :

Hadoop Deployment Tool

Jazz Wang
Yao-Tsung Wang
jazz@nchc.org.tw

- Make Hadoop deployment *agile*
- Integrate with dynamic cluster deployments

Source: Deploying hadoop with smartfrog
http://people.apache.org/~stevel/slides/deploying_hadoop_with_smartfrog.pdf

SmartFrog - HPLabs' CM tool

- Language for describing systems to deploy —everything from datacentres to test cases
- Runtime to create *components* from the model
- Components have a lifecycle
- LGPL Licensed, Java 5+

http://smartfrog.org/

Source: Deploying hadoop with smartfrog
http://people.apache.org/~stevel/slides/deploying_hadoop_with_smartfrog.pdf

LABS hp

Basic problem: deploying Hadoop

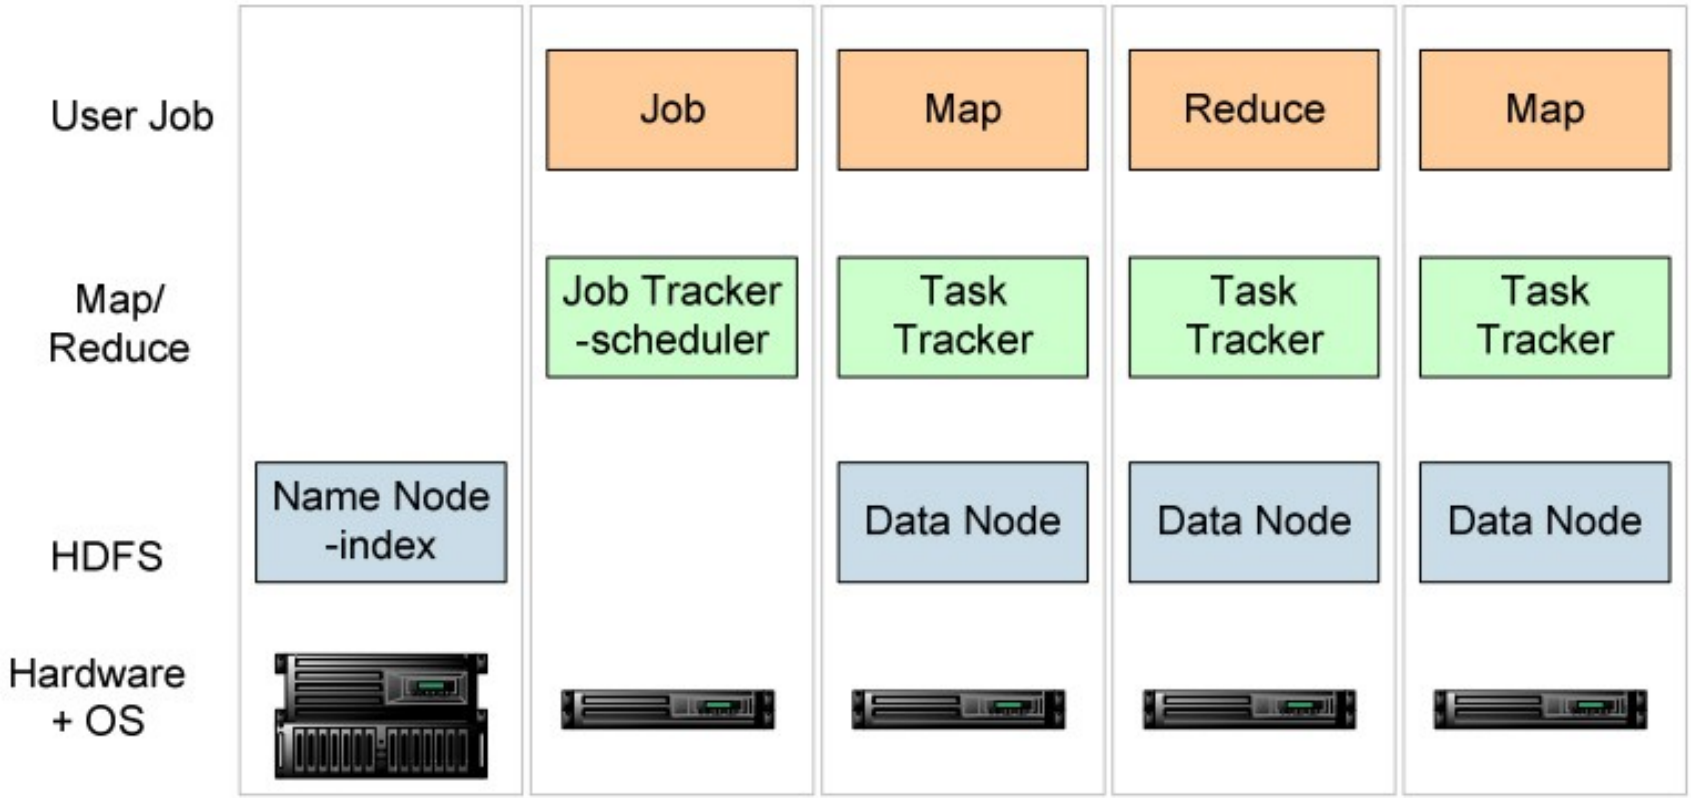

one namenode, 1+ Job Tracker, many data nodes and task trackers

Source: Deploying hadoop with smartfrog
http://people.apache.org/~stevel/slides/deploying_hadoop_with_smartfrog.pdf

The hand-managed cluster

- Manual install onto machines
- SCP/FTP in Hadoop zip
- copy out hadoop-site.xml and other files
- edit /etc/hosts, /etc/rc5.d, SSH keys …
- Installation scales O(N)
- Maintenance, debugging scales worse

Source: Deploying hadoop with smartfrog
http://people.apache.org/~stevel/slides/deploying_hadoop_with_smartfrog.pdf

The locked-down cluster

- PXE Preboot of OS images
- RedHat Kickstart to serve up (see instalinux.com)
- Maybe: LDAP to manage state, or custom RPMs

Requires:

uniform images, central LDAP service, good ops team, stable configurations, home-rolled RPMs

Source: Deploying hadoop with smartfrog
http://people.apache.org/~stevel/slides/deploying_hadoop_with_smartfrog.pdf

CM-tool managed cluster

Configuration Management tools

- State Driven: observe system state, push it back into the desired state
- Workflow: apply a sequence of operations to change a machine's state
- Centralized: central DB in charge
- Decentralized: machines look after themselves

CM tools are the only way to manage big clusters

Source: Deploying hadoop with smartfrog
http://people.apache.org/~stevel/slides/deploying_hadoop_with_smartfrog.pdf

Model the system in the SmartFrog language

```
TwoNodeHDFS extends OneNodeHDFS {

  localDataDir2 extends TempDirWithCleanup {

  }

  datanode2 extends datanode {
    dataDirectories [LAZY localDataDir2];
    dfs.datanode.https.address "https://localhost:0";
  }
}
```

Inheritance, cross-referencing, templating

Source: Deploying hadoop with smartfrog
http://people.apache.org/~stevel/slides/deploying_hadoop_with_smartfrog.pdf

The runtime deploys the model

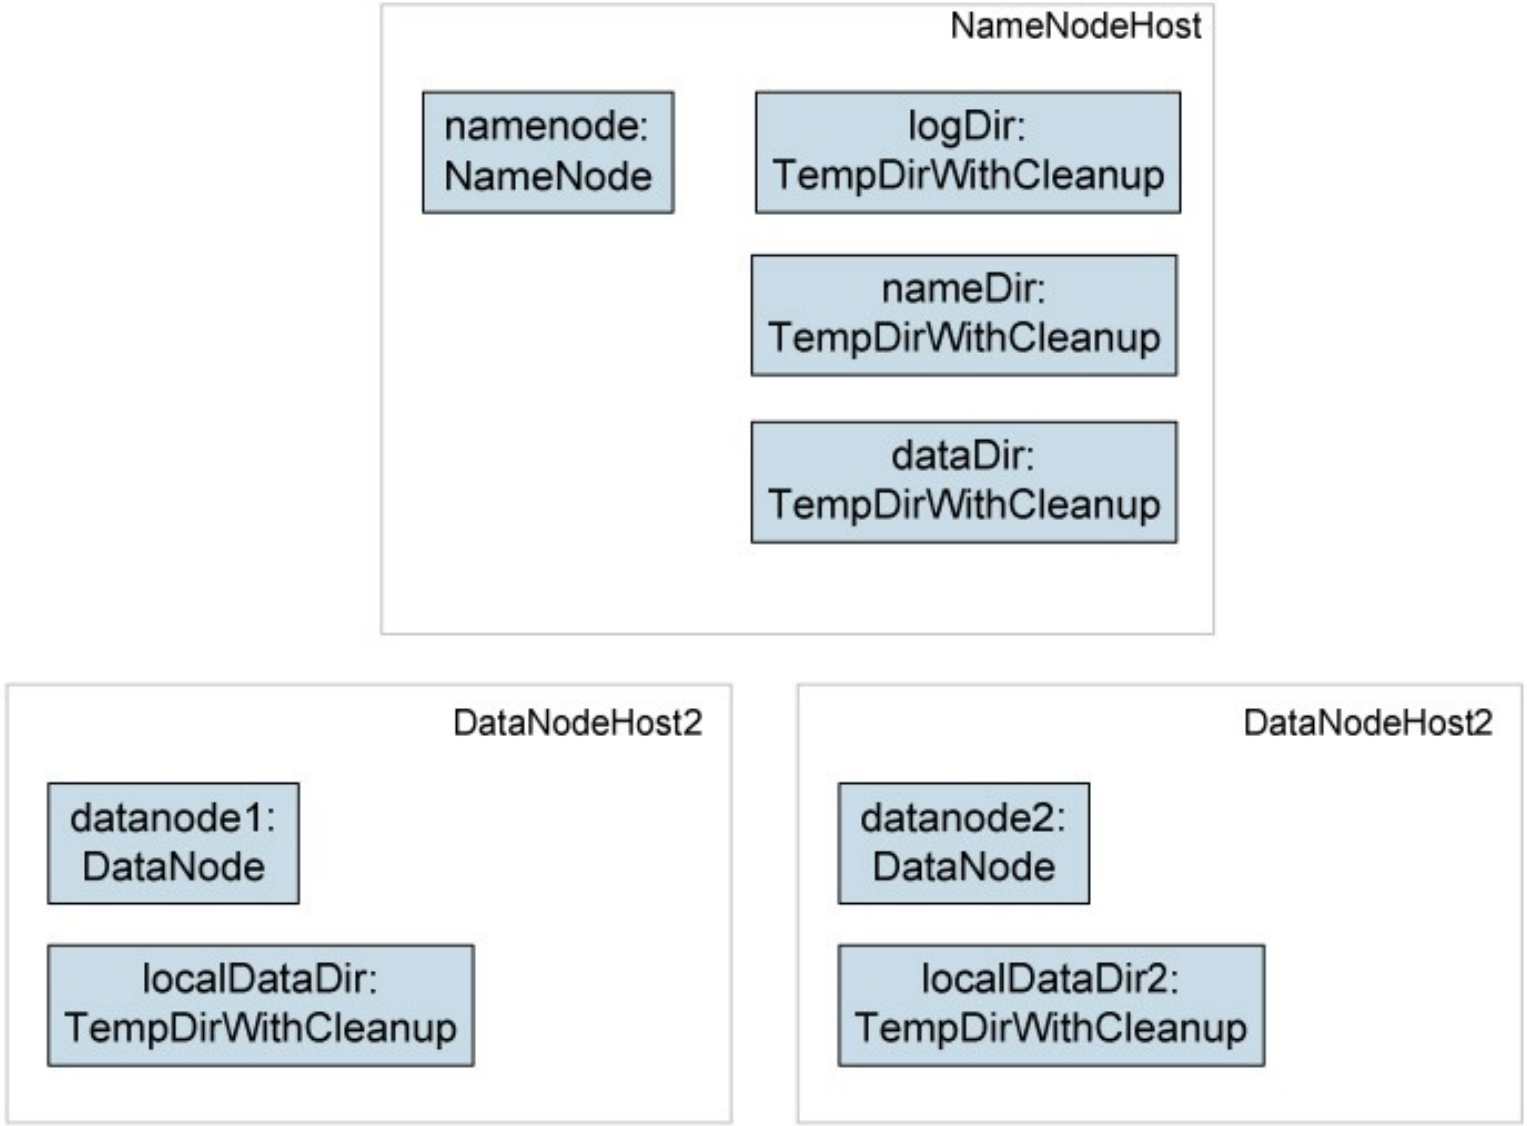

Source: Deploying hadoop with smartfrog
http://people.apache.org/~stevel/slides/deploying_hadoop_with_smartfrog.pdf

Steps to deployability

1. Configure Hadoop from an SmartFrog description
2. Write components for the Hadoop nodes
3. Write the functional tests
4. Add *workflow* components to work with the filesystem; submit jobs
5. Get the tests to pass

Source: Deploying hadoop with smartfrog
http://people.apache.org/~stevel/slides/deploying_hadoop_with_smartfrog.pdf

PART 2-2 :

Introduction to DRBL

Jazz Wang
Yao-Tsung Wang
jazz@nchc.org.tw

What is DRBL ??

- **Diskless Remote Boot in Linux**
- Network is cheap, and our time is expansive
- In simple words, DRBL is .....
  - Replace IDE/SATA cable with network cable
  - 40+ student PCs connected to one DRBL server

Diskfull PC

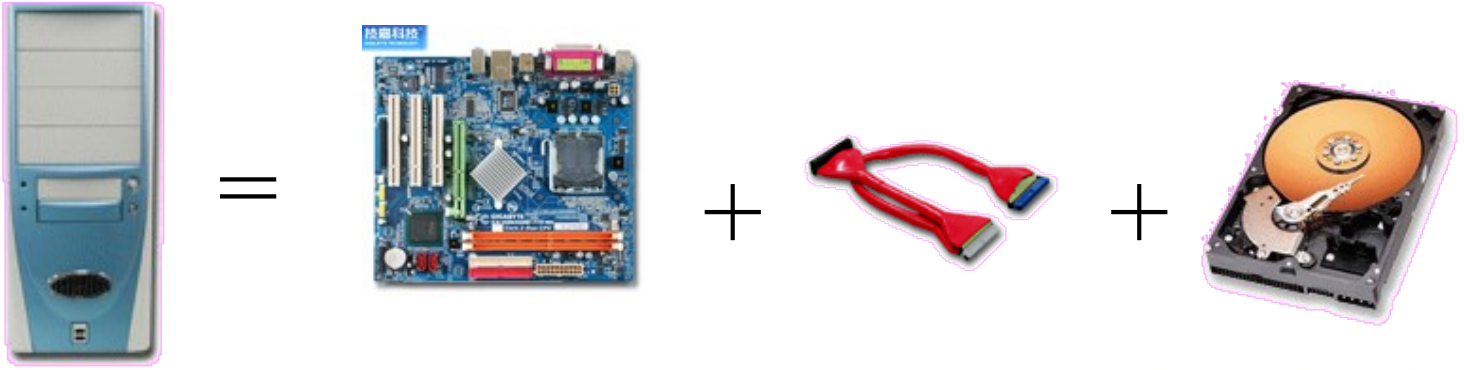

Diskless PC

Server

source: http://www.mren.com.tw

1st, We install Base System of GNU/Linux on Management Node.

You can choose:

Redhat, Fedora, CentOS, Mandriva, Ubuntu, Debian, ...

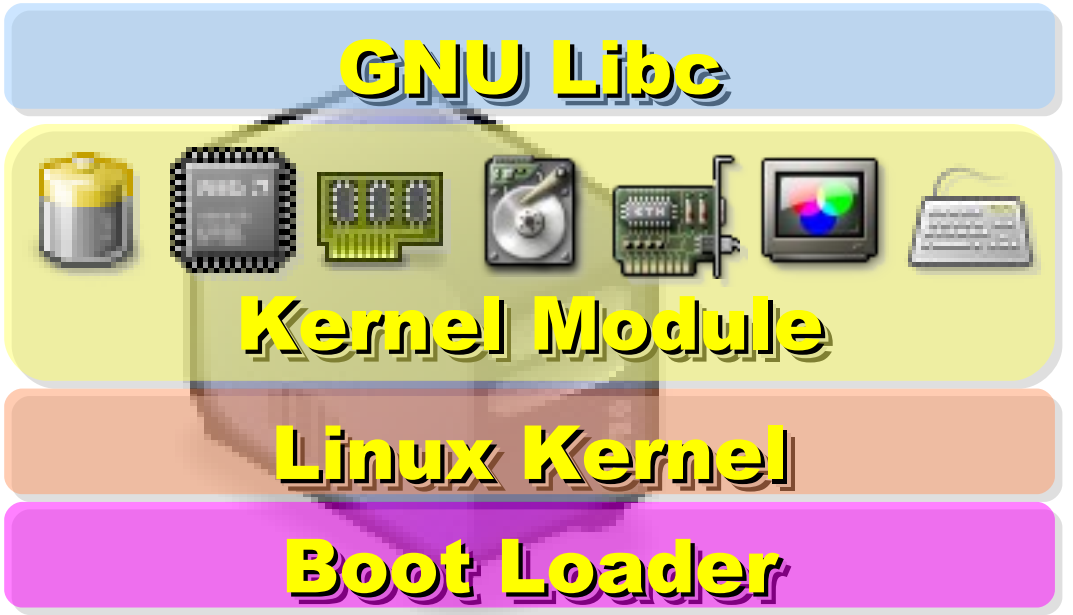

2nd, We install DRBL package and configure it as DRBL Server.

There are lots of service needed:

SSHD, DHCPD, TFTPD, NFS Server,
NIS Server, YP Server ...

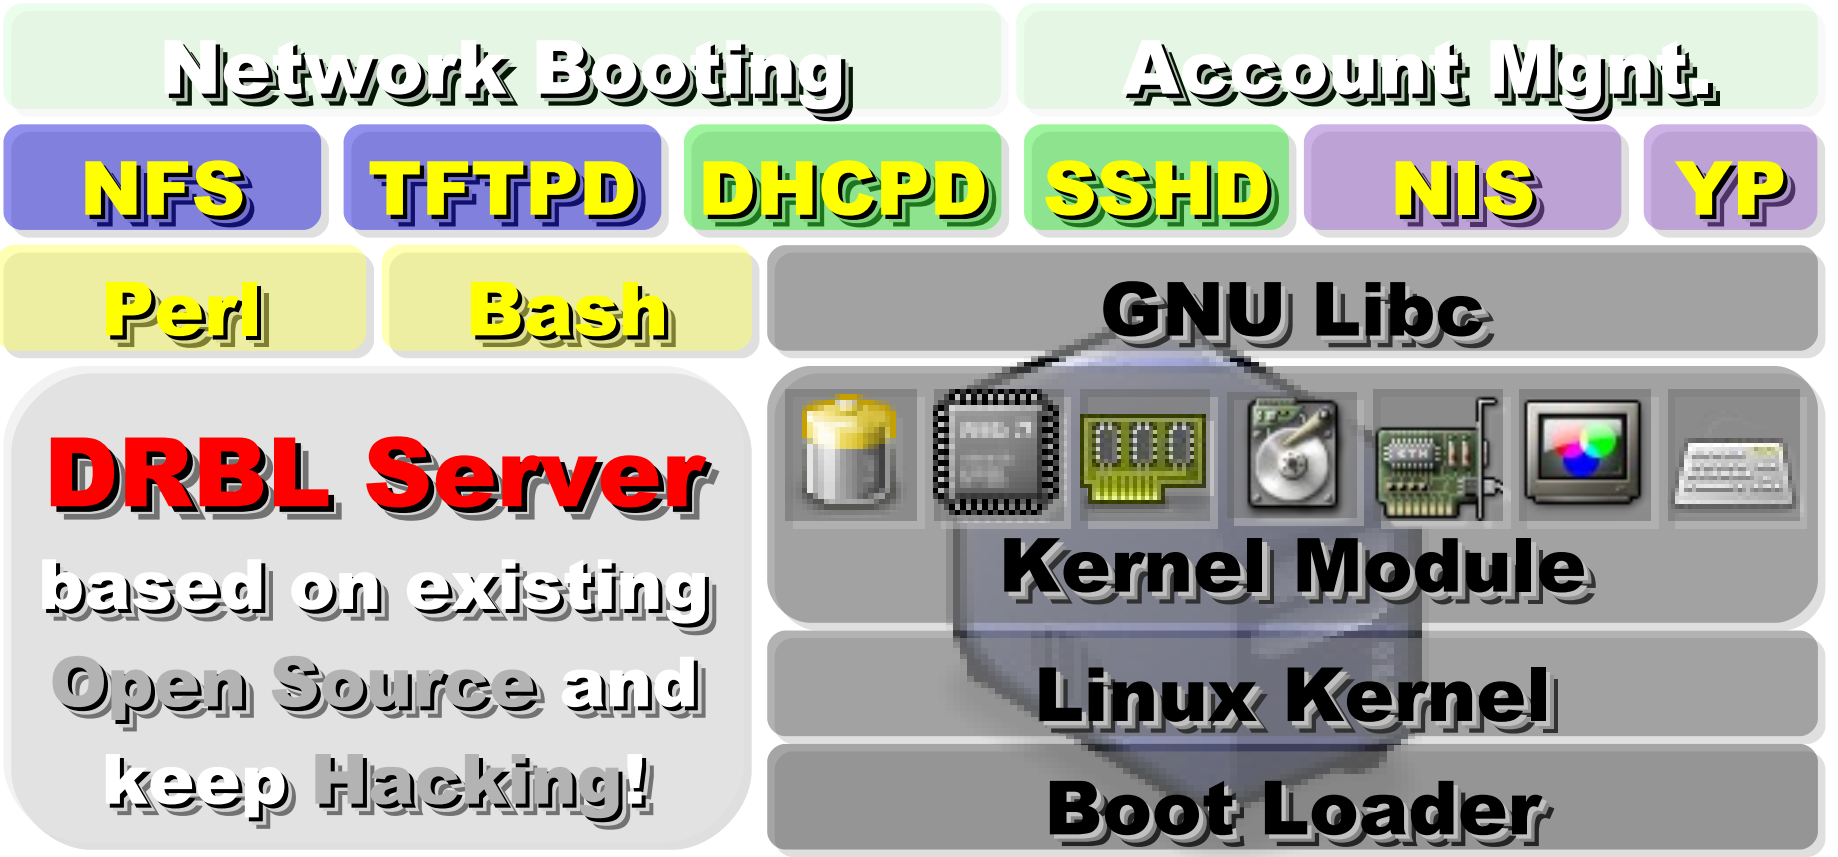

DRBL Server
based on existing Open Source and keep Hacking!

After running "drblsrv -i" & "drblpush -i", there will be pxelinux, vmlinux-pex, initrd-pxe in TFTPROOT, and different configuration files for each Compute Node in NFSROOT

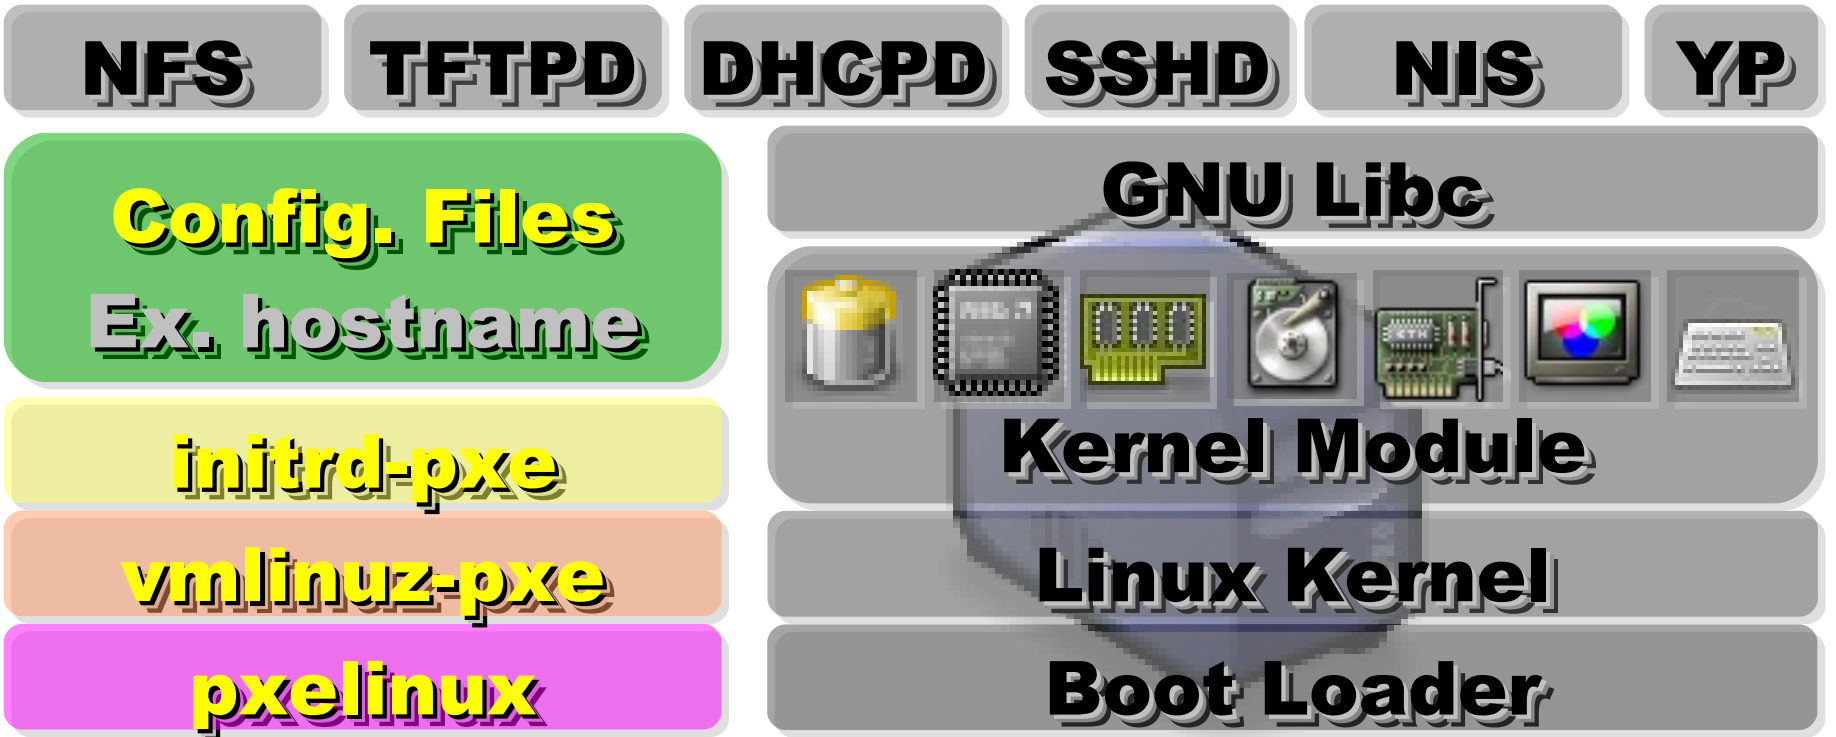

3nd, We enable PXE function in BIOS configuration.

BIOS PXE | BIOS PXE | BIOS PXE | BIOS PXE

NFS | TFTPD | DHCPD | SSHD | NIS | YP

Config. Files
Ex. hostname

initrd-pxe

vmlinuz-pxe

pxelinux

GNU Libc

Kernel Module

Linux Kernel

Boot Loader

While Booting, PXE will query IP address from DHCPD.

BIOS PXE | BIOS PXE | BIOS PXE | BIOS PXE

NFS | TFTPD | DHCPD | SSHD | NIS | YP

Config. Files
Ex. hostname

initrd-pxe

vmlinuz-pxe

pxelinux

GNU Libc

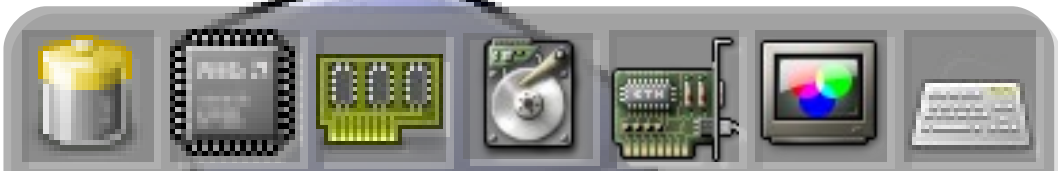

Kernel Module

Linux Kernel

Boot Loader

While Booting, PXE will query IP address from DHCPD.

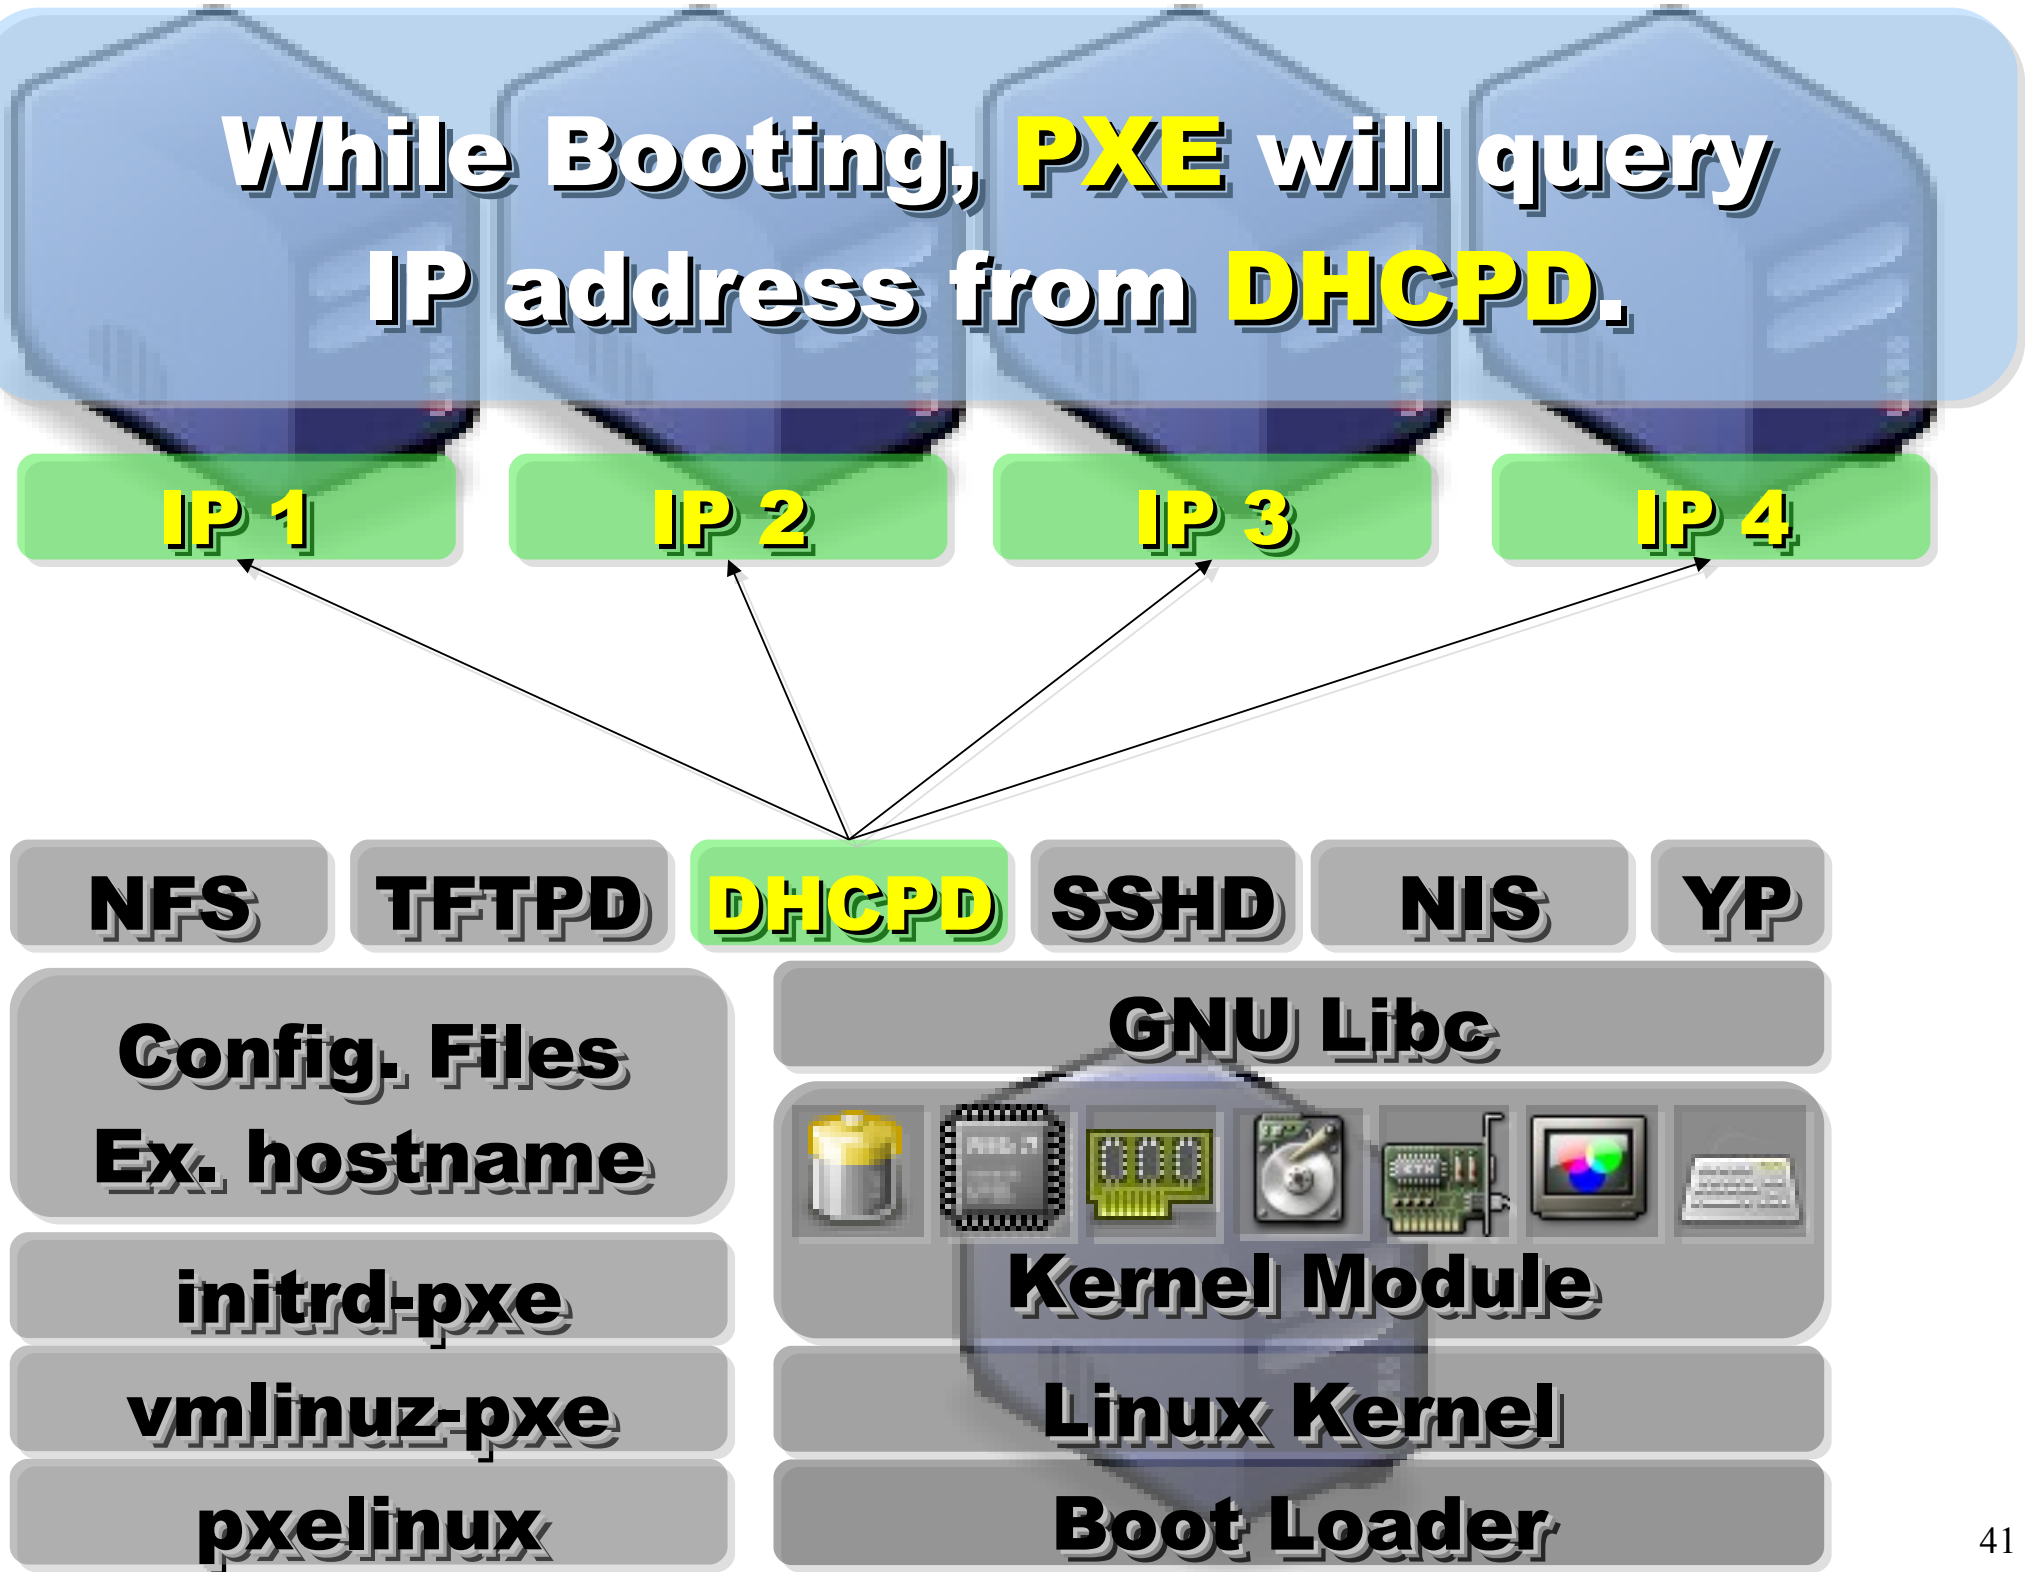

After PXE get its IP address, it will download booting files from TFTPD.

IP 1 | IP 2 | IP 3 | IP 4

NFS | TFTPD | DHCPD | SSHD | NIS | YP

Config. Files
Ex. hostname

initrd-pxe

vmlinuz-pxe

pxelinux

GNU Libc

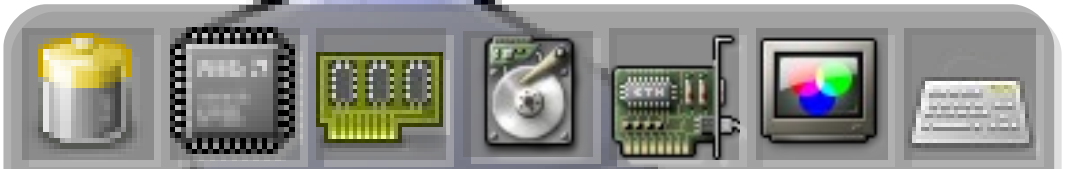

Kernel Module

Linux Kernel

Boot Loader

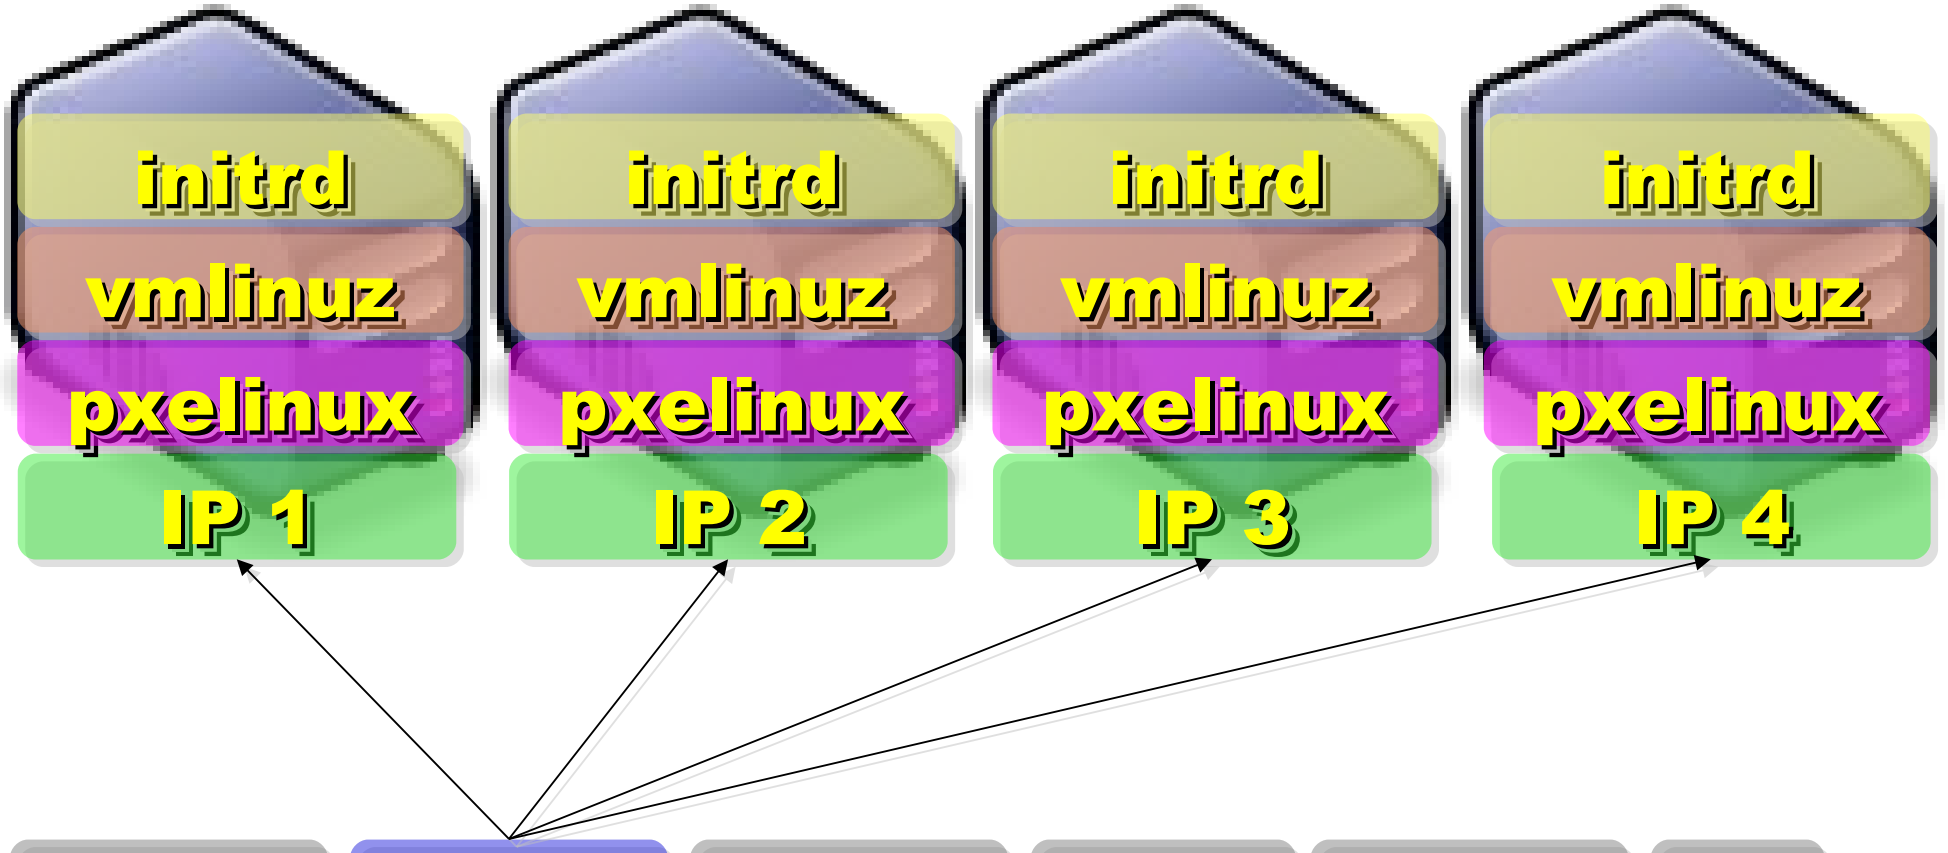

NFS | TFTPD | DHCPD | SSHD | NIS | YP

Config. Files
Ex. hostname

initrd-pxe

vmlinuz-pxe

pxelinux

GNU Libc

Kernel Module

Linux Kernel

Boot Loader

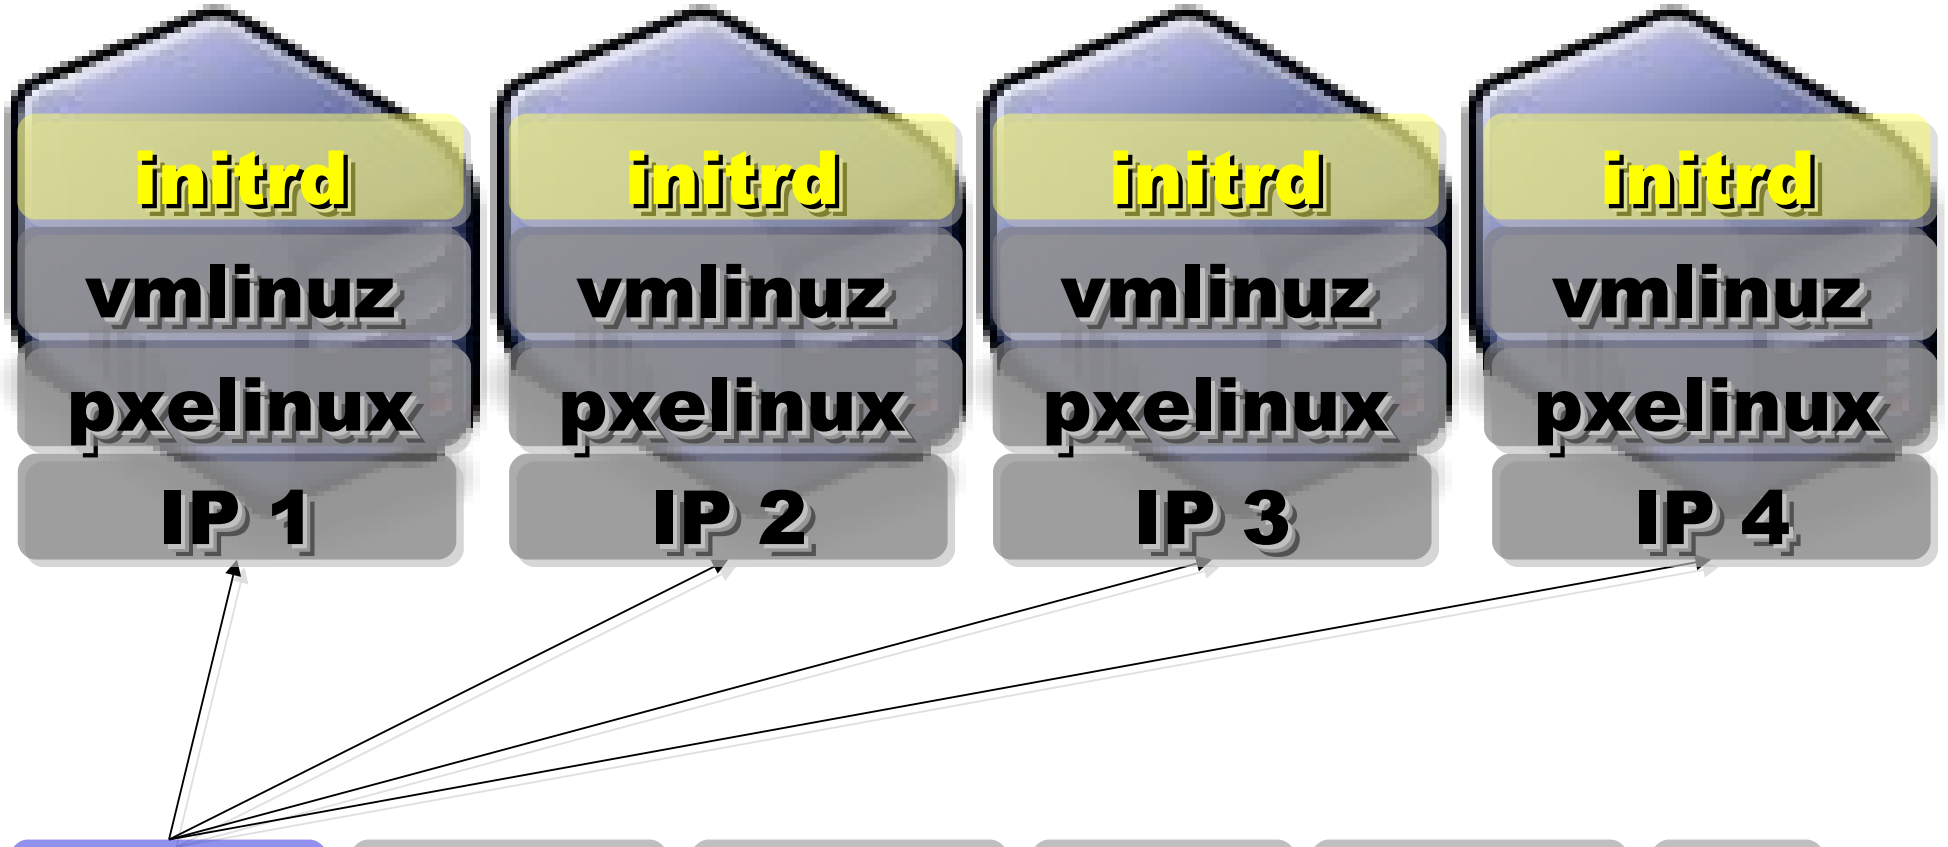

NFS | TFTPD | DHCPD | SSHD | NIS | YP

Config. Files

GNU Libc

pxelinux

Boot Loader

After downloading booting files, scripts in initrd-pxe will config NFSROOT for each Compute Node.

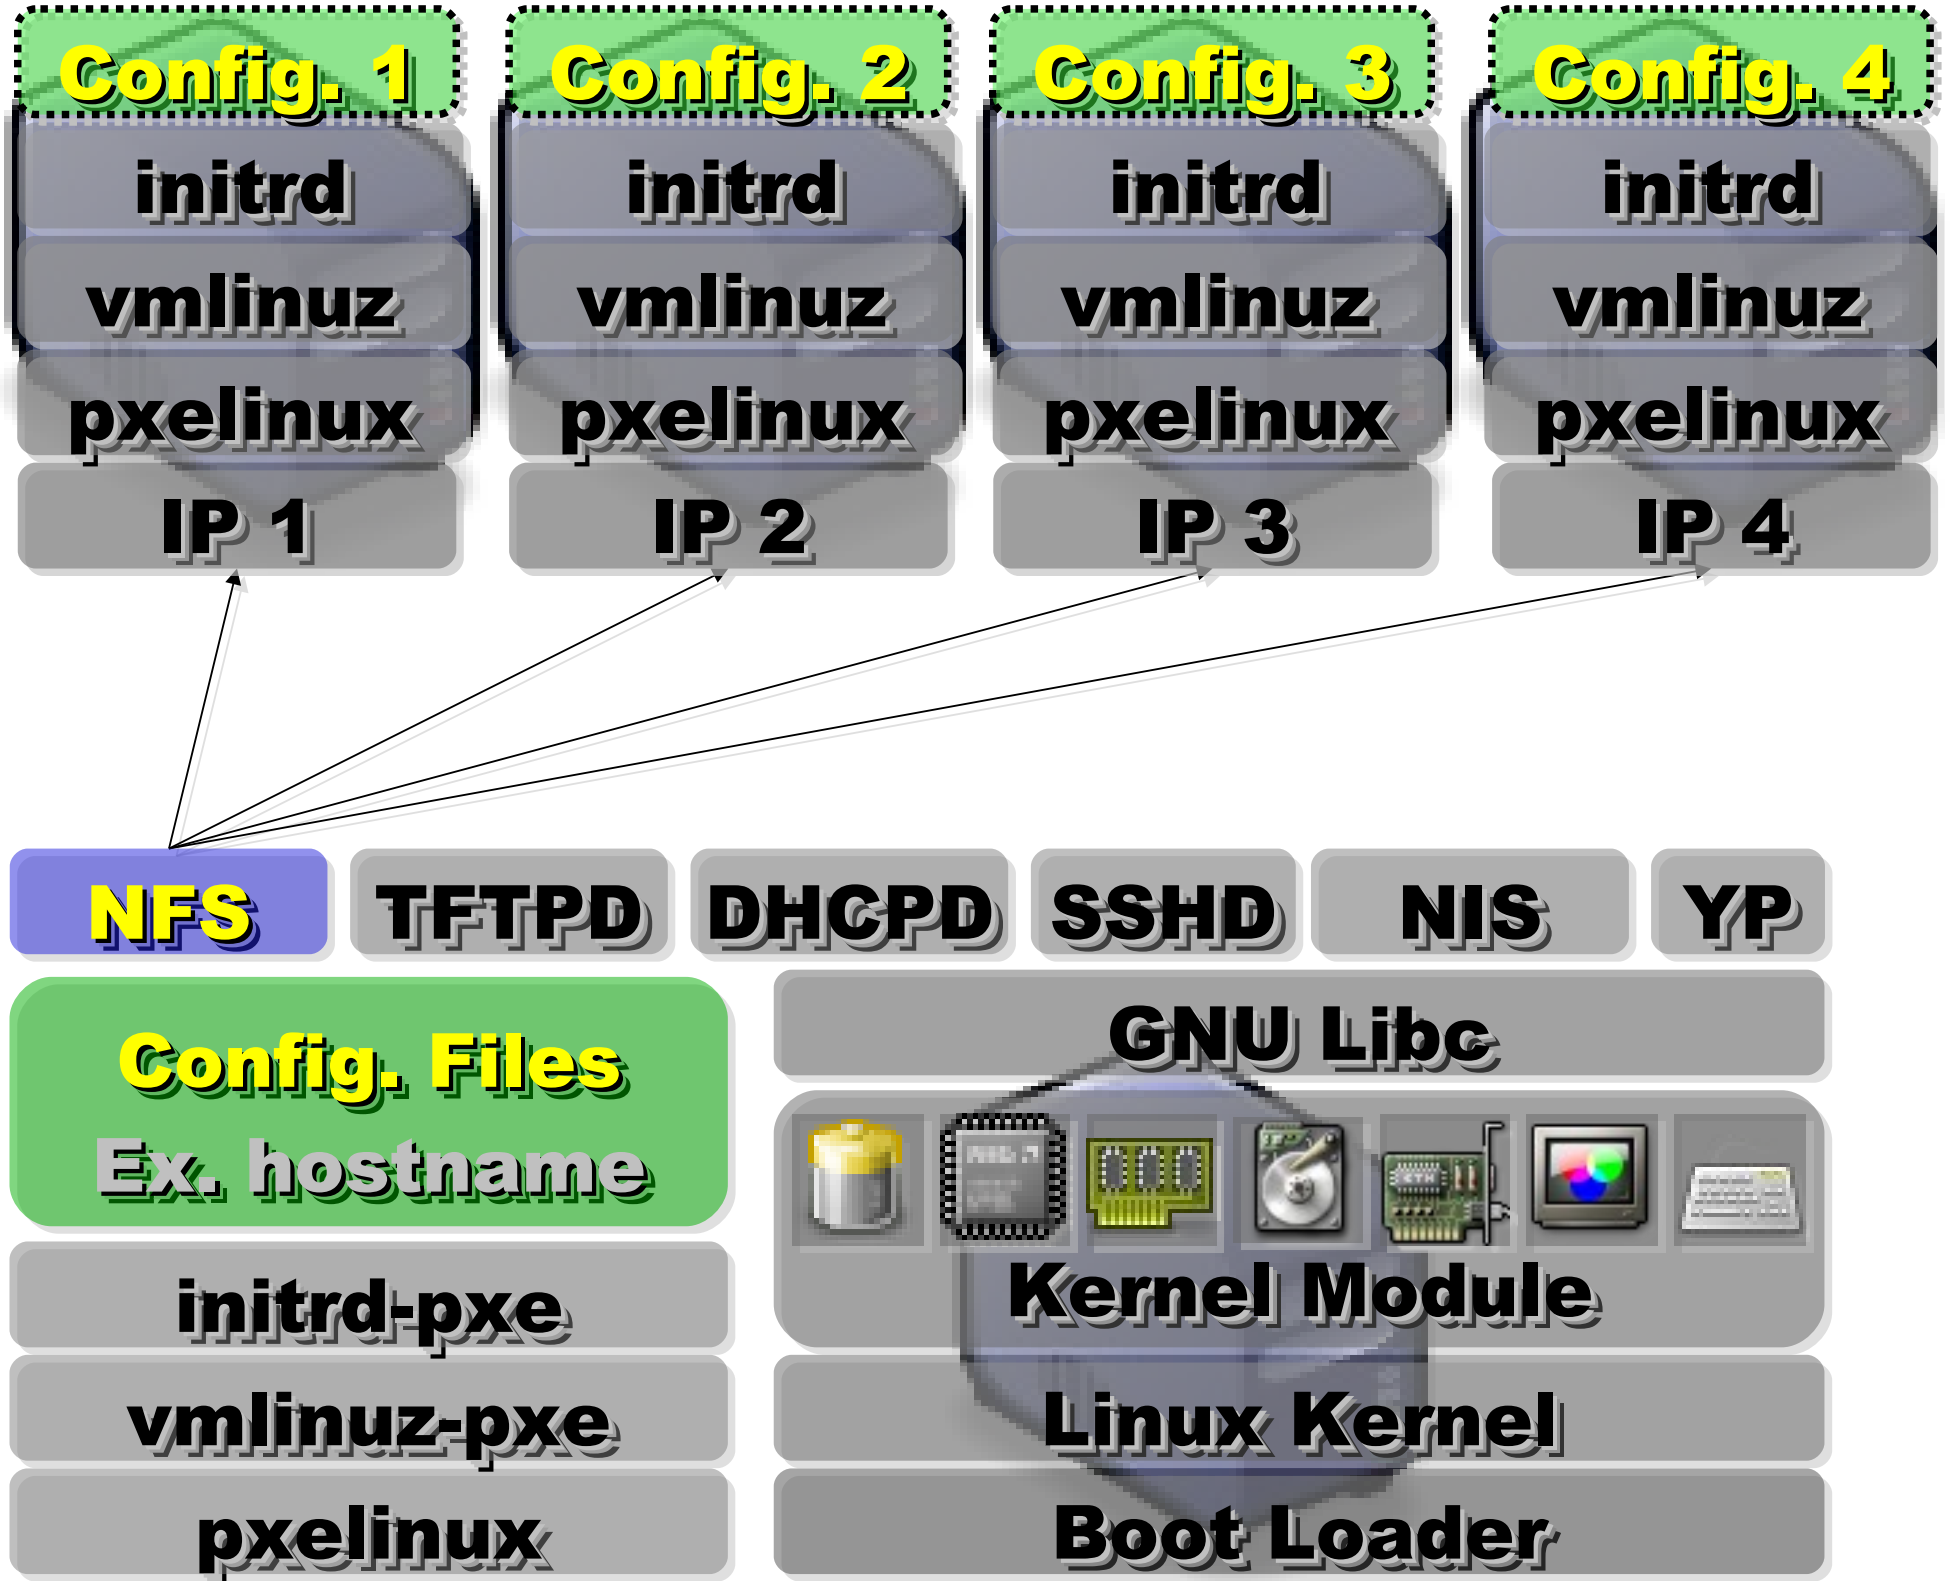
Config. 1
Config. 2
Config. 3
Config. 4
initrd
vmlinuz
pxelinux
IP 1
IP 2
IP 3
IP 4
NFS
TFTPD
DHCPD
SSHD
NIS
YP
Config. Files
Ex. hostname
initrd-pxe
vmlinuz-pxe
pxelinux
GNU Libc
Kernel Module
Linux Kernel
Boot Loader

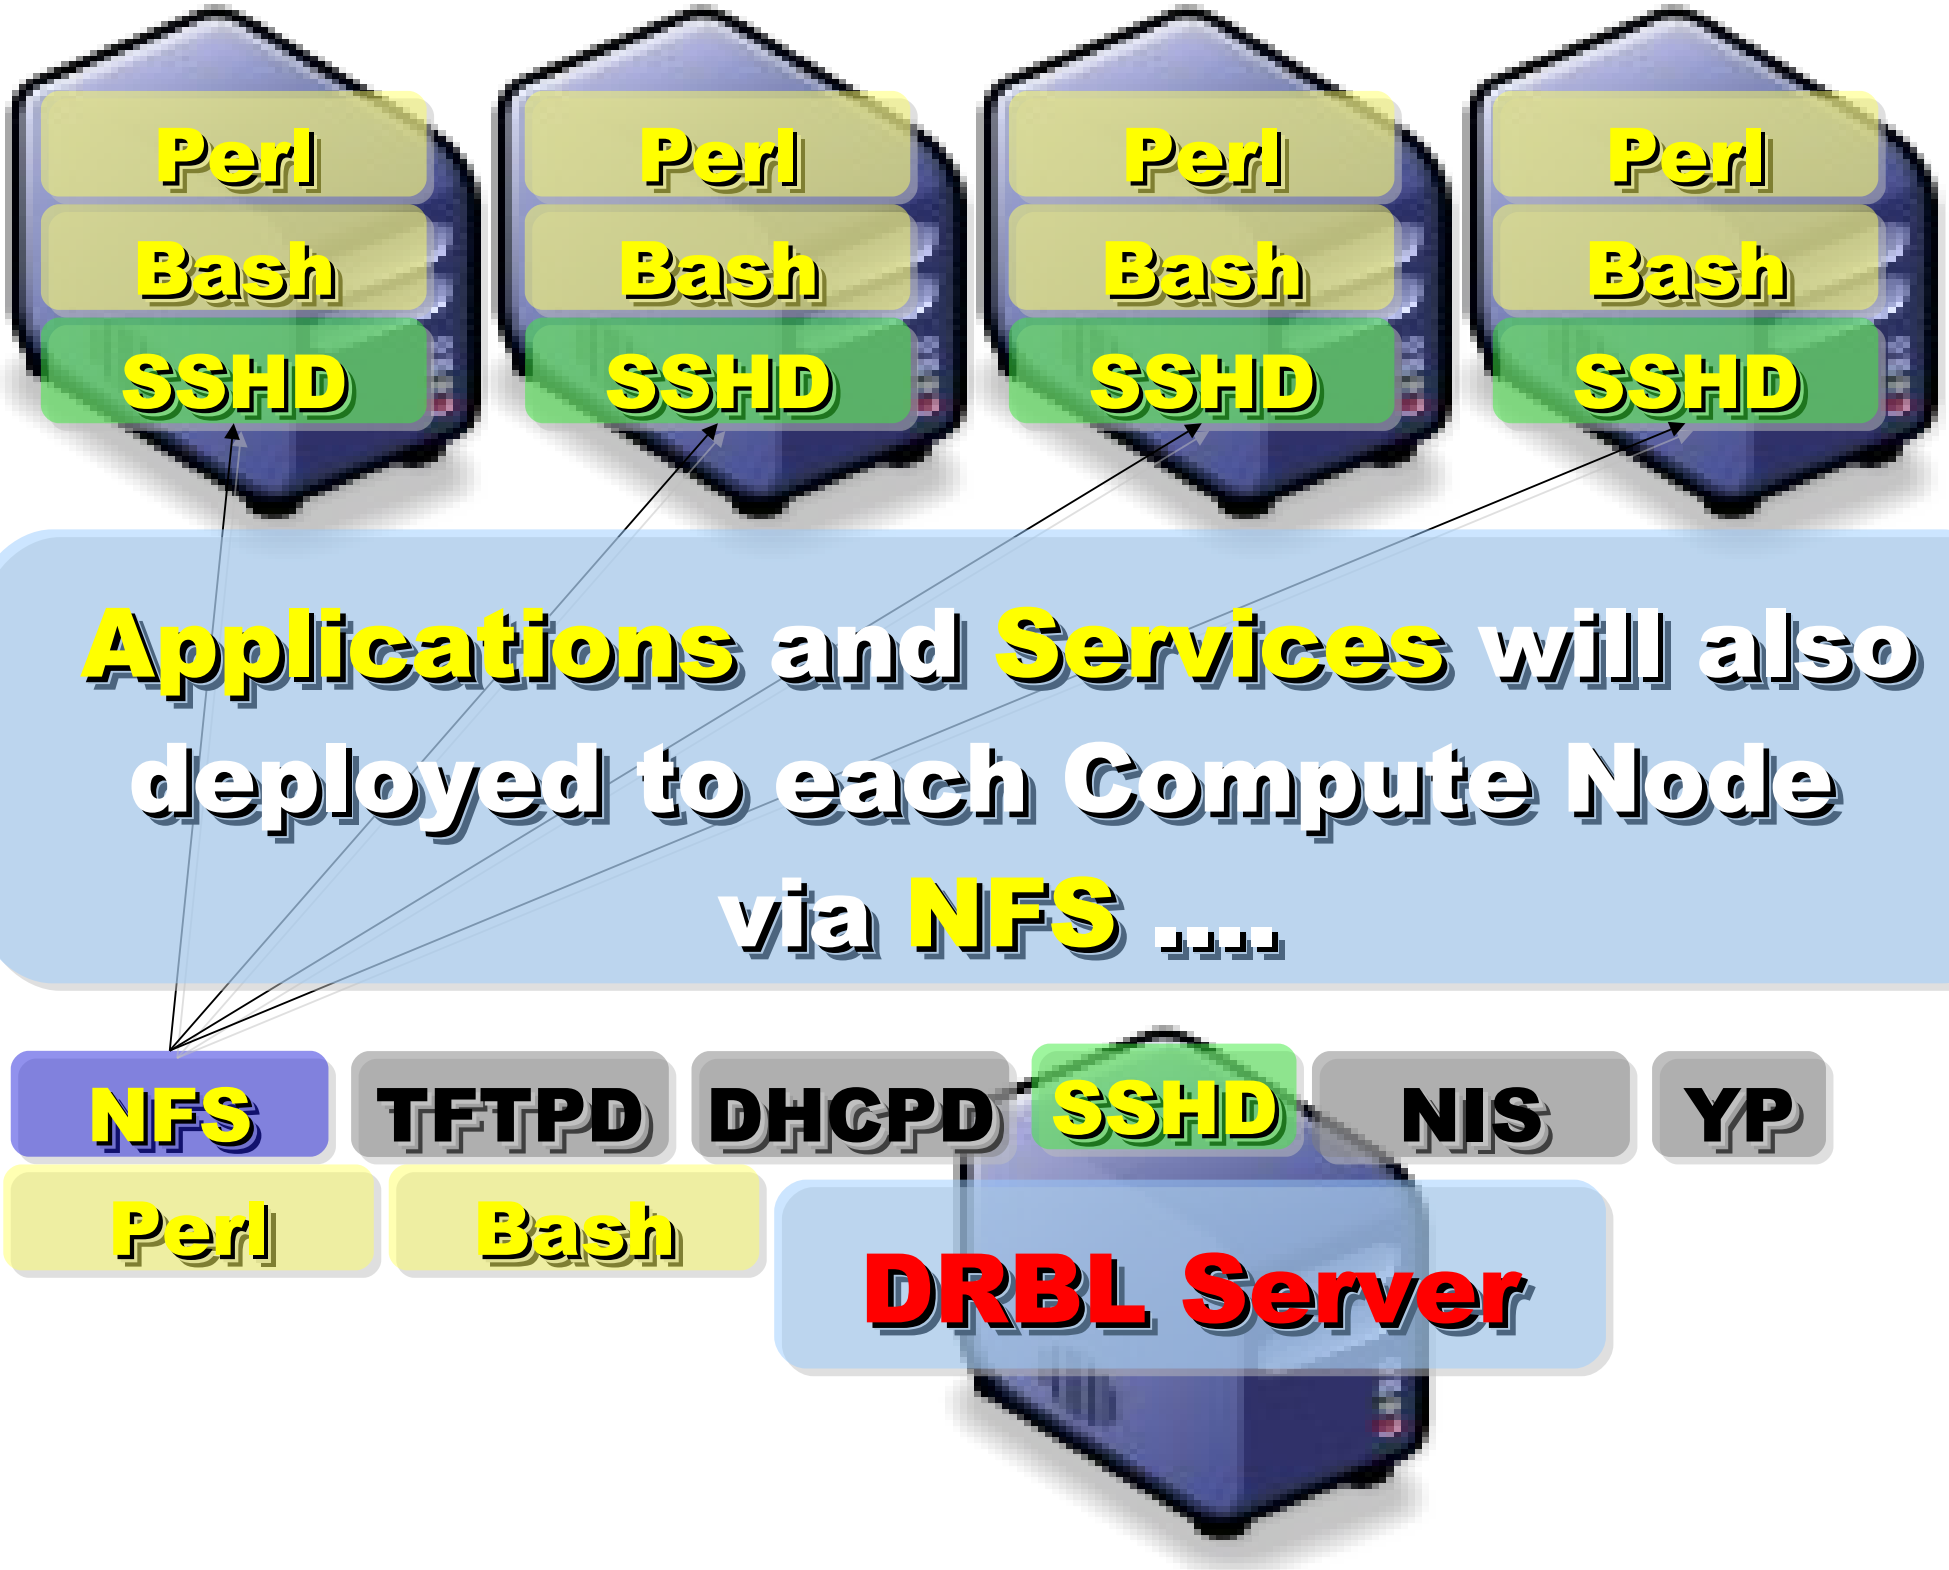
Perl
Bash
SSHD
Perl
Bash
SSHD
Perl
Bash
SSHD
Perl
Bash
SSHD
Applications and Services will also deployed to each Compute Node via NFS ....
NFS
TFTPD
DHCPD
SSHD
NIS
YP
Perl
Bash
DRBL Server

With the help of NIS and YP,
You can login each Compute Node
with the Same ID / PASSWORD
stored in DRBL Server!

SSH Client

NFS TFTPD DHCPD SSHD NIS YP

DRBL Server

Questions?

Slides - http://trac.nchc.org.tw/cloud

Jazz Wang
Yao-Tsung Wang
jazz@nchc.org.tw

Powered by DRBL

Hadoop 相關計畫

Hadoop Ecosystem

Jazz Wang

Yao-Tsung Wang

jazz@nchc.org.tw

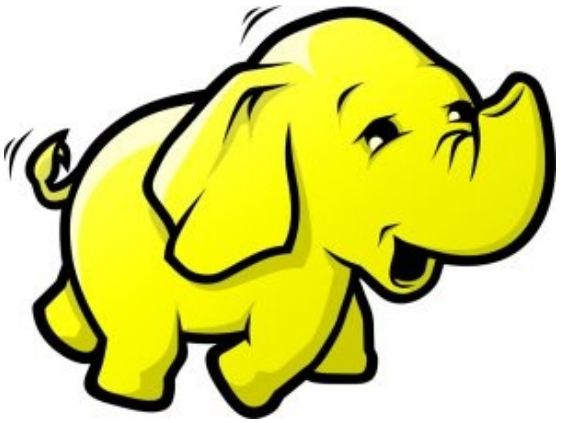

Hadoop 只支援用 **Java** 開發嘛？

Is Hadoop only support Java ?

總不能全部都重新設計吧？如何與舊系統相容？

Can Hadoop work with existing software ?



可以跟資料庫結合嘛？

Can Hadoop work with Databases ?

開發者們有聽到大家的需求.....

Yes, we hear the feedback of developers ...

Is Hadoop only support Java ?

- Although the Hadoop framework is implemented in Java™, Map/Reduce applications need not be written in Java.
- Hadoop Streaming is a utility which allows users to create and run jobs with any executables (e.g. shell utilities) as the mapper and/or the reducer.
- Hadoop Pipes is a SWIG-compatible C++ API to implement Map/Reduce applications (non JNI™ based).

Hadoop Pipes (C++, Python)

- Hadoop Pipes allows C++ code to use Hadoop DFS and map/reduce.
- The C++ interface is "swigable" so that interfaces can be generated for python and other scripting languages.
- For more detail, check the API Document of org.apache.hadoop.mapred.pipes
- You can also find example code at

  hadoop-*/src/examples/pipes
- About the pipes C++ WordCount example code:

  http://wiki.apache.org/hadoop/C++WordCount

Hadoop Streaming

- Hadoop Streaming is a utility which allows users to create and run Map-Reduce jobs with any executables (e.g. Unix shell utilities) as the mapper and/or the reducer.
- It's useful when you need to run existing program written in shell script, perl script or even PHP.
- Note: both the mapper and the reducer are executables that read the input from STDIN (line by line) and emit the output to STDOUT.
- For more detail, check the official document of Hadoop Streaming

Running Hadoop Streaming

```
jazz@hadoop:~$ hadoop jar hadoop-streaming.jar -help
10/08/11 00:20:00 ERROR streaming.StreamJob: Missing required option -input
Usage: $HADOOP_HOME/bin/hadoop [--config dir] jar \
          $HADOOP_HOME/hadoop-streaming.jar [options]
Options:
  -input    <path>     DFS input file(s) for the Map step
  -output   <path>     DFS output directory for the Reduce step
  -mapper   <cmd|JavaClassName>      The streaming command to run
  -combiner <JavaClassName> Combiner has to be a Java class
  -reducer  <cmd|JavaClassName>      The streaming command to run
  -file     <file>     File/dir to be shipped in the Job jar file
  -dfs    <h:p>|local  Optional. Override DFS configuration
  -jt     <h:p>|local  Optional. Override JobTracker configuration
  -additionalconfspec specfile  Optional.
  -inputformat TextInputFormat(default)|SequenceFileAsTextInputFormat|
JavaClassName Optional.
  -outputformat TextOutputFormat(default)|JavaClassName  Optional.
```

… More …

Hadoop Streaming with shell commands (1)

```
hadoop:~$ hadoop fs -rmr input output
hadoop:~$ hadoop fs -put /etc/hadoop/conf input
hadoop:~$ hadoop jar hadoop-streaming.jar -input
input -output output -mapper /bin/cat
-reducer /usr/bin/wc
```

Hadoop Streaming with shell commands (2)

```
hadoop:~$ echo "sed -e \"s/ /\n/g\" | grep ." > streamingMapper.sh
hadoop:~$ echo "uniq -c | awk '{print \$2 \"\t\" \$1}'" > streamingReducer.sh
hadoop:~$ chmod a+x streamingMapper.sh
hadoop:~$ chmod a+x streamingReducer.sh
hadoop:~$ hadoop fs -put /etc/hadoop/conf input
hadoop:~$ hadoop jar hadoop-streaming.jar -input input -output output -mapper streamingMapper.sh -reducer streamingReducer.sh -file streamingMapper.sh -file streamingReducer.sh
```

There are serveral Hadoop subprojects

- Hadoop Common: The common utilities that support the other Hadoop subprojects.
- HDFS: A distributed file system that provides high throughput access to application data.
- MapReduce: A software framework for distributed processing of large data sets on compute clusters.

Other Hadoop related projects

- Chukwa: A data collection system for managing large distributed systems.
- HBase: A scalable, distributed database that supports structured data storage for large tables.
- Hive: A data warehouse infrastructure that provides data summarization and ad hoc querying.
- Pig: A high-level data-flow language and execution framework for parallel computation.
- ZooKeeper: A high-performance coordination service for distributed applications.

Hadoop Ecosystem

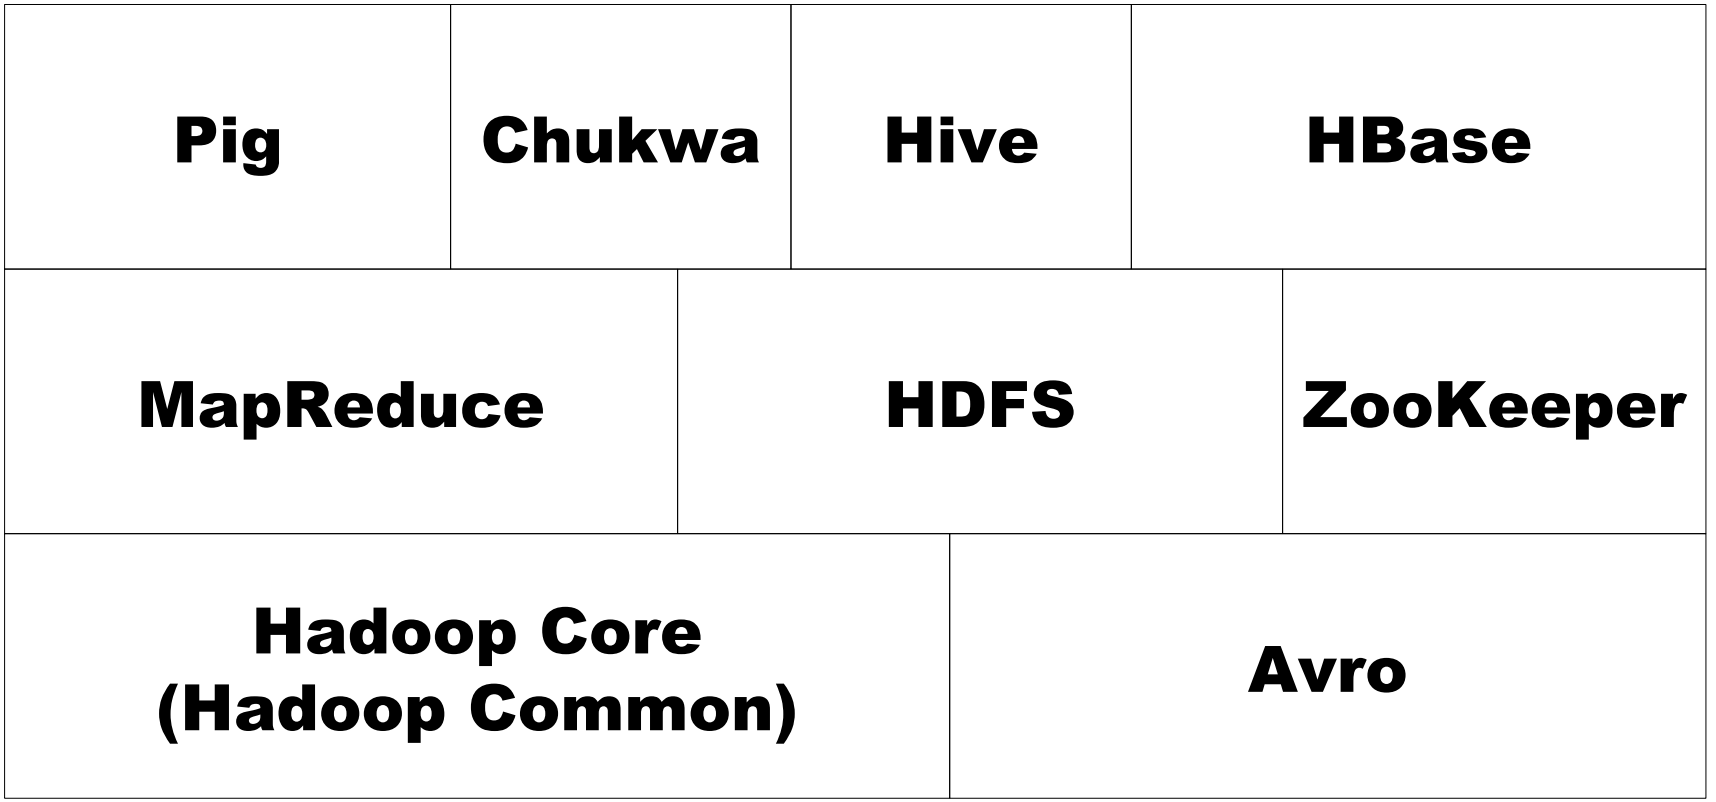

Source: *Hadoop: The Definitive Guide*

Avro

- Avro is a data serialization system.
- It provides:
  - *Rich data structures.*
  - *A compact, fast, binary data format.*
  - *A container file, to store persistent data.*
  - *Remote procedure call (RPC).*
  - *Simple integration with dynamic languages.*
- Code generation is not required to read or write data files nor to use or implement RPC protocols. Code generation as an optional optimization, only worth implementing for statically typed languages.
- For more detail, please check the official document: http://avro.apache.org/docs/current/

Zoo Keeper

- http://hadoop.apache.org/zookeeper/
- ZooKeeper is a centralized service for maintaining configuration information, naming, providing distributed synchronization, and providing group services. All of these kinds of services are used in some form or another by distributed applications.
- *Each time they are implemented there is a lot of work that goes into fixing the bugs and race conditions that are inevitable. Because of the difficulty of implementing these kinds of services, applications initially usually skimp on them ,which make them brittle in the presence of change and difficult to manage. Even when done correctly, different implementations of these services lead to management complexity when the applications are deployed.*

Pig

- http://hadoop.apache.org/pig/
- Pig is a platform for analyzing large data sets that consists of a high-level language for expressing data analysis programs, coupled with infrastructure for evaluating these programs.
- Pig's infrastructure layer consists of a compiler that produces sequences of Map-Reduce programs
- Pig's language layer currently consists of a textual language called Pig Latin, which has the following key properties:
  - Ease of programming
  - Optimization opportunities
  - Extensibility

Hive

- http://hadoop.apache.org/hive/
- Hive is a data warehouse infrastructure built on top of Hadoop that provides tools to enable easy data summarization, adhoc querying and analysis of large datasets data stored in Hadoop files.
- Hive QL is based on SQL and enables users familiar with SQL to query this data.

Chukwa

- http://hadoop.apache.org/chukwa/
- Chukwa is an open source data collection system for monitoring large distributed systems.
- built on top of HDFS and Map/Reduce framework
- includes a flexible and powerful toolkit for displaying, monitoring and analyzing results to make the best use of the collected data.

Mahout

- http://mahout.apache.org/
- Mahout is a scalable machine learning libraries.
- implemented on top of Apache Hadoop using the map/reduce paradigm.
- Mahout currently has
  - Collaborative Filtering
  - User and Item based recommenders
  - K-Means, Fuzzy K-Means clustering
  - Mean Shift clustering
  - More ...

HBase 雲端資料庫

Introduction to HBase

Jazz Wang

Yao-Tsung Wang

jazz@nchc.org.tw

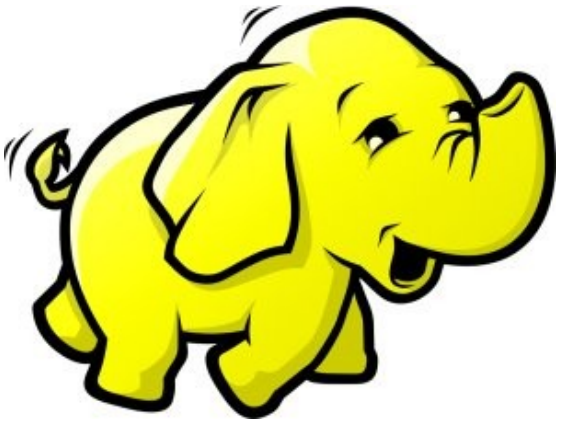

It's all about SCALE!!

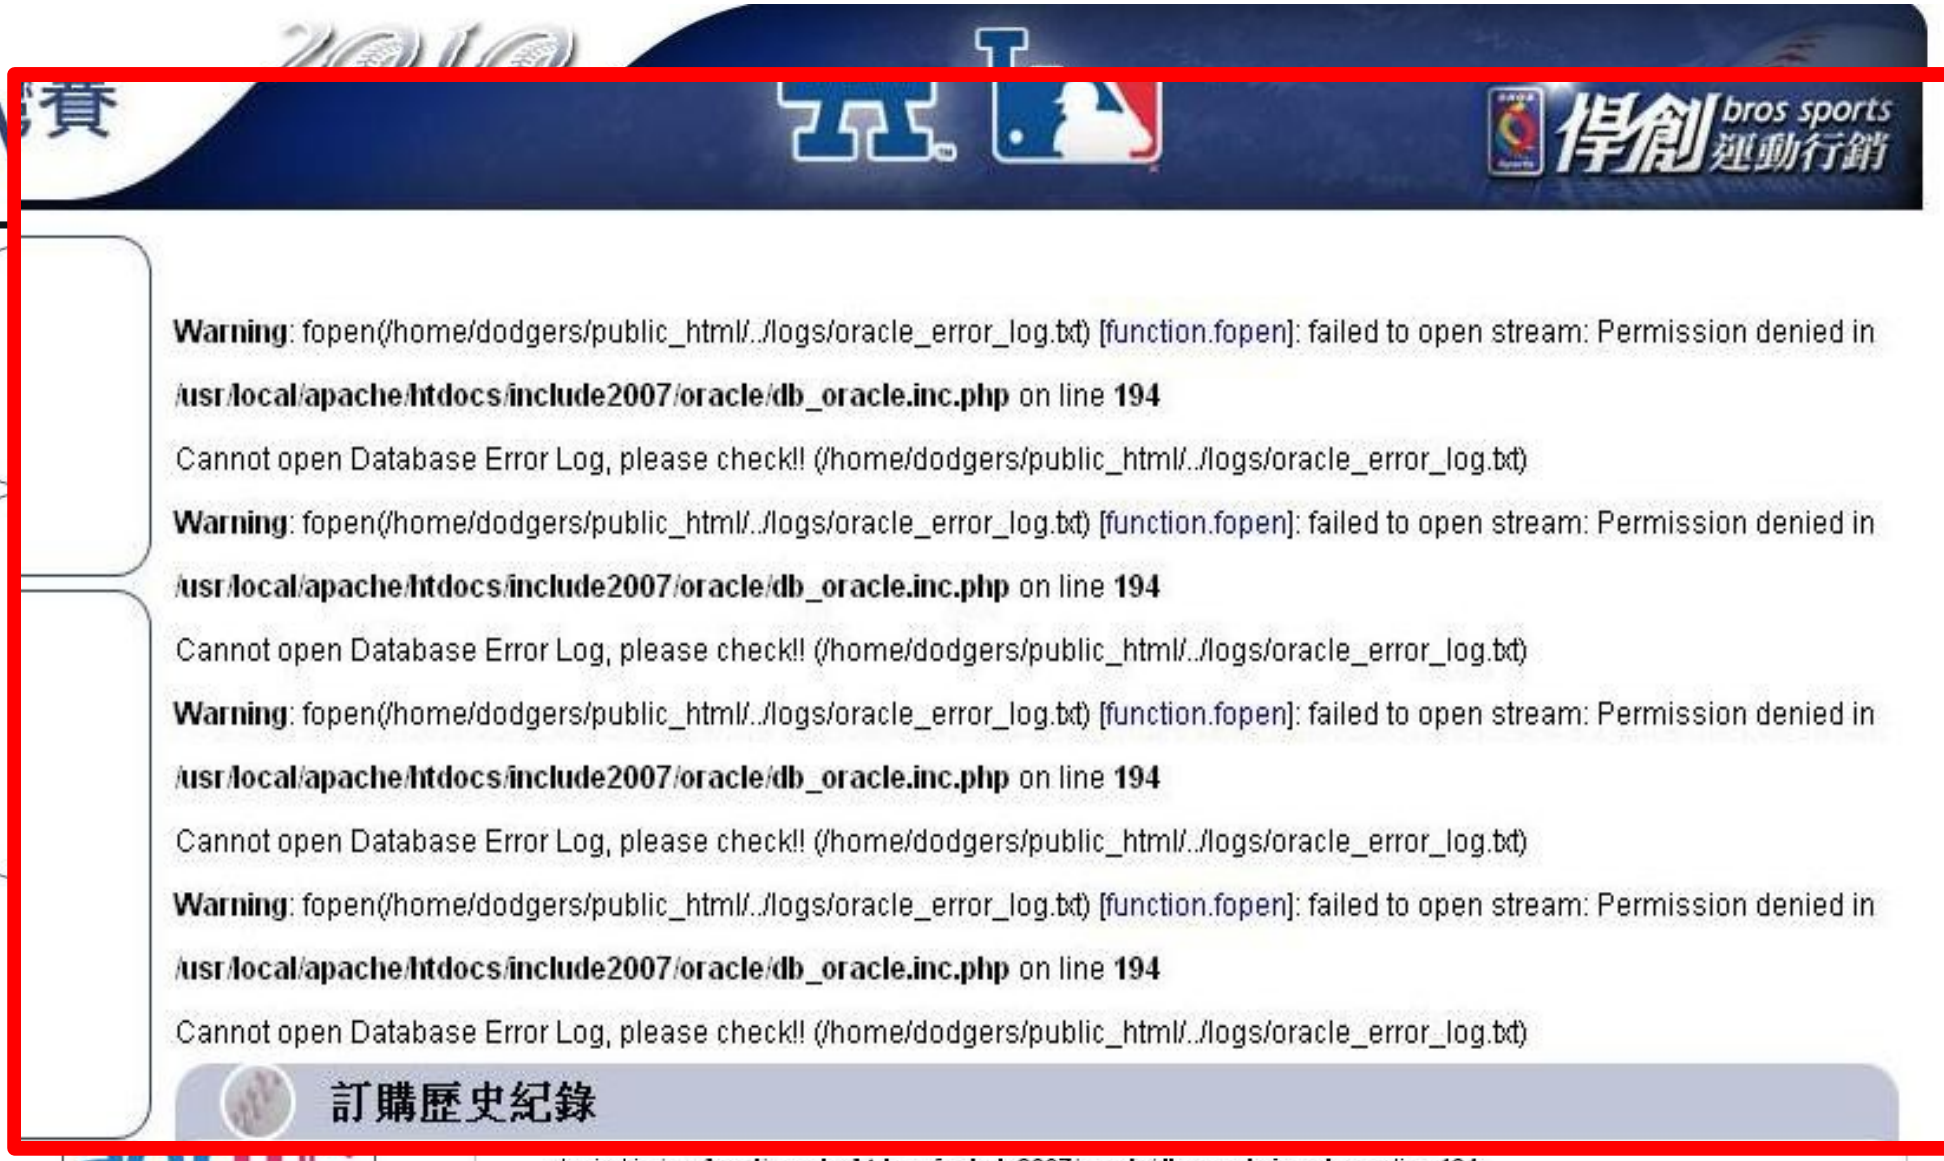

How to scale up web service in the past ?

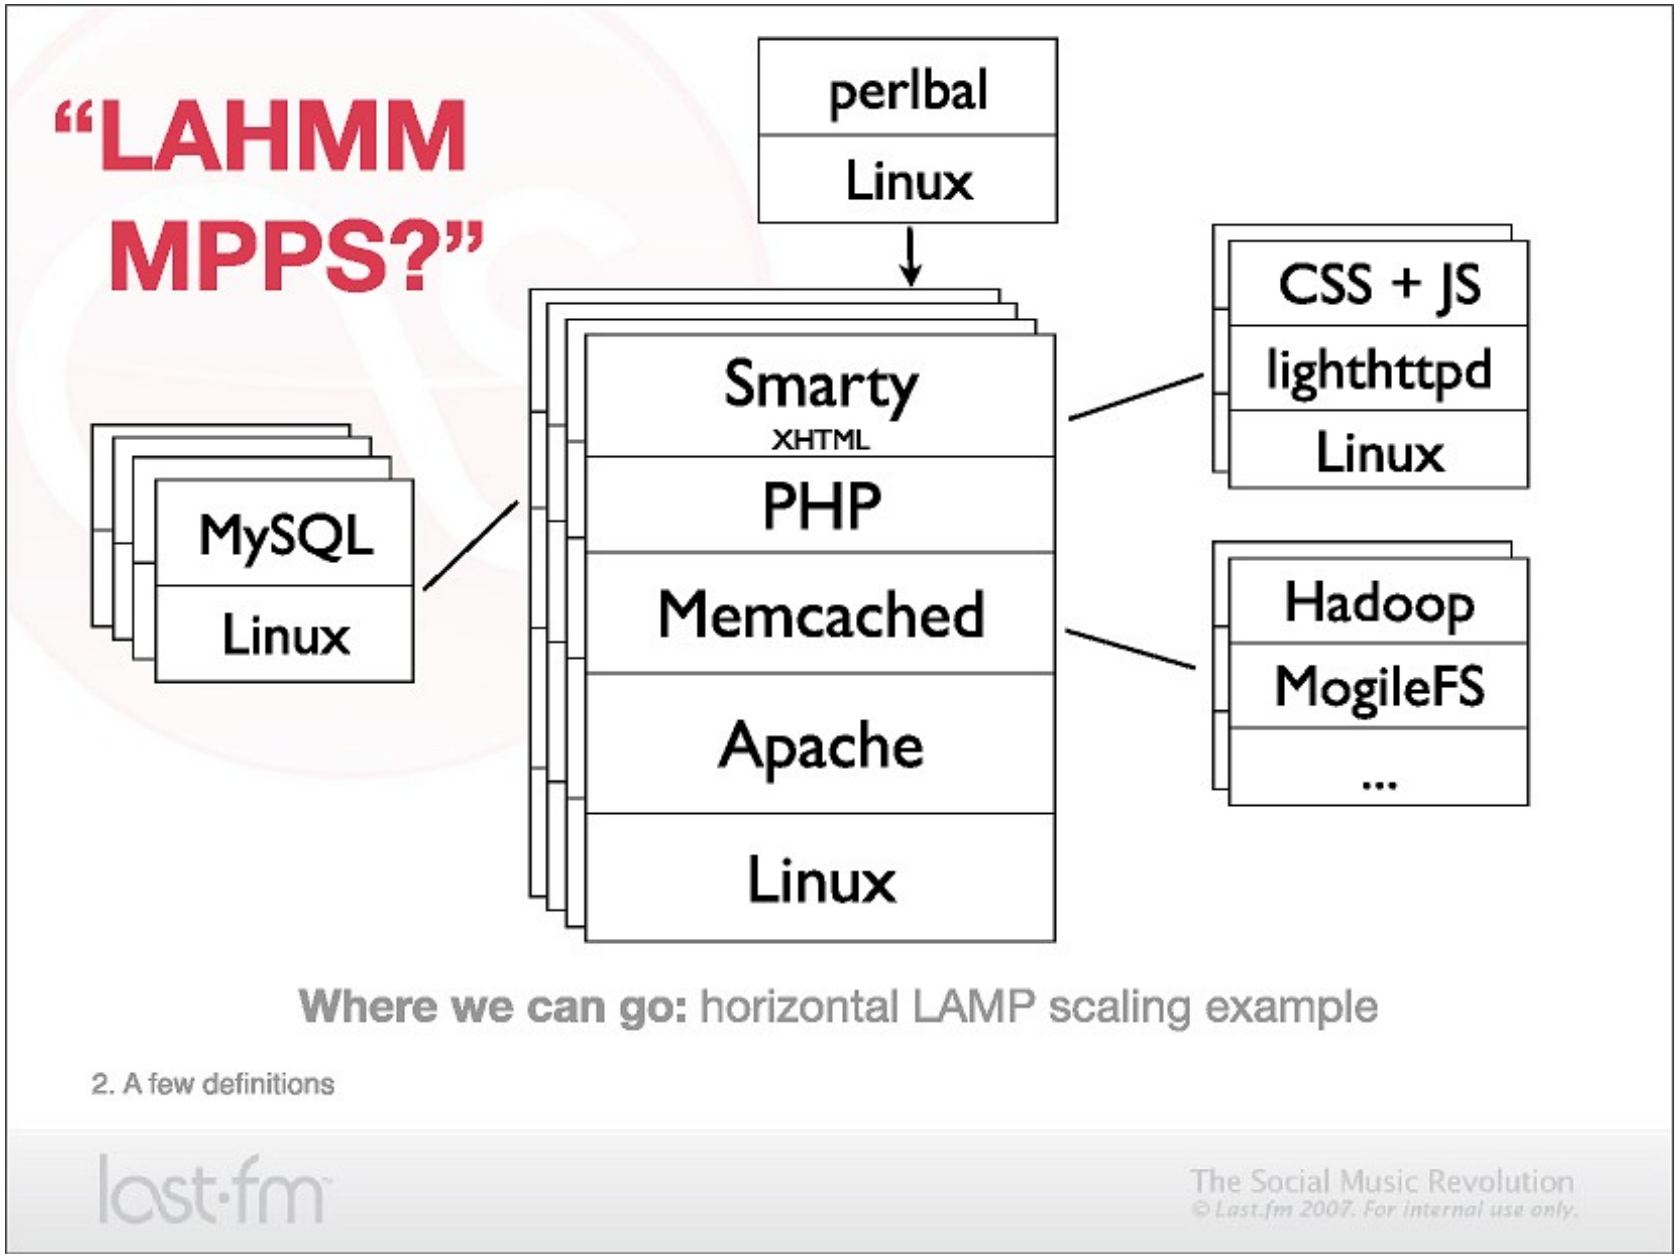

Source: http://www.slideshare.net/mallipeddi/scalable-lamp-development-for-growing-web-apps

Tools used by large scale websites

- Perlbal - http://www.danga.com/perlbal/
  - 多個網頁伺服器的負載平衡
  - Load balancer
- MogileFS - http://www.danga.com/mogilefs/
  - 分散式檔案系統
  - Distributed File System fo small files
  - 有公司認爲 MogileFS 比起 Hadoop 適合拿來處理小檔案
- memcached - http://memcached.org/
  - 共享記憶體 ??
  - Share Memory
  - 把資料庫或經常讀取的部分，
    用記憶體快取 (Cache) 方式存放
- Moxi - http://code.google.com/p/moxi/
  - Memcache 的 PROXY
- More Resource:
  - http://code.google.com/p/memcached/wiki/HowToLearnMoreScalability
  - http://www.slideshare.net/techdude/scalable-web-architectures-common-patterns-and-approaches

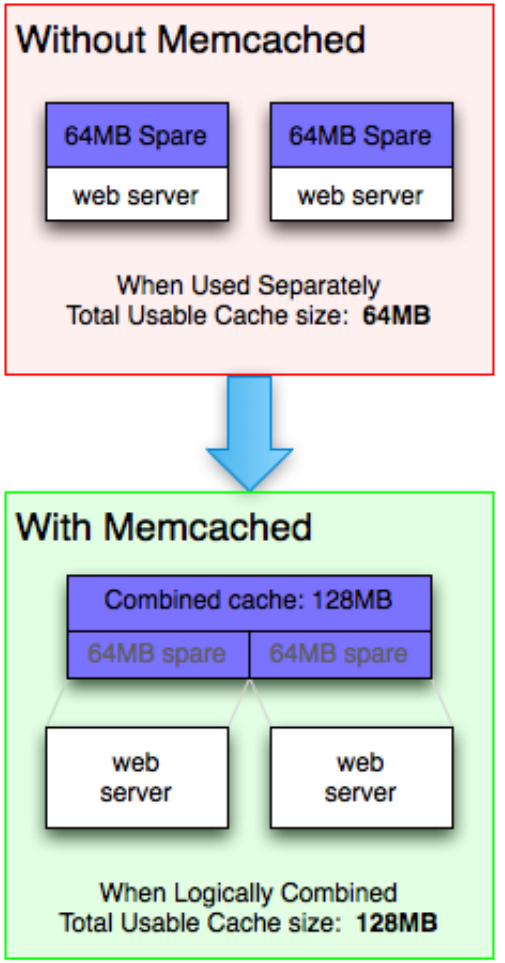

Memcached & MySQL

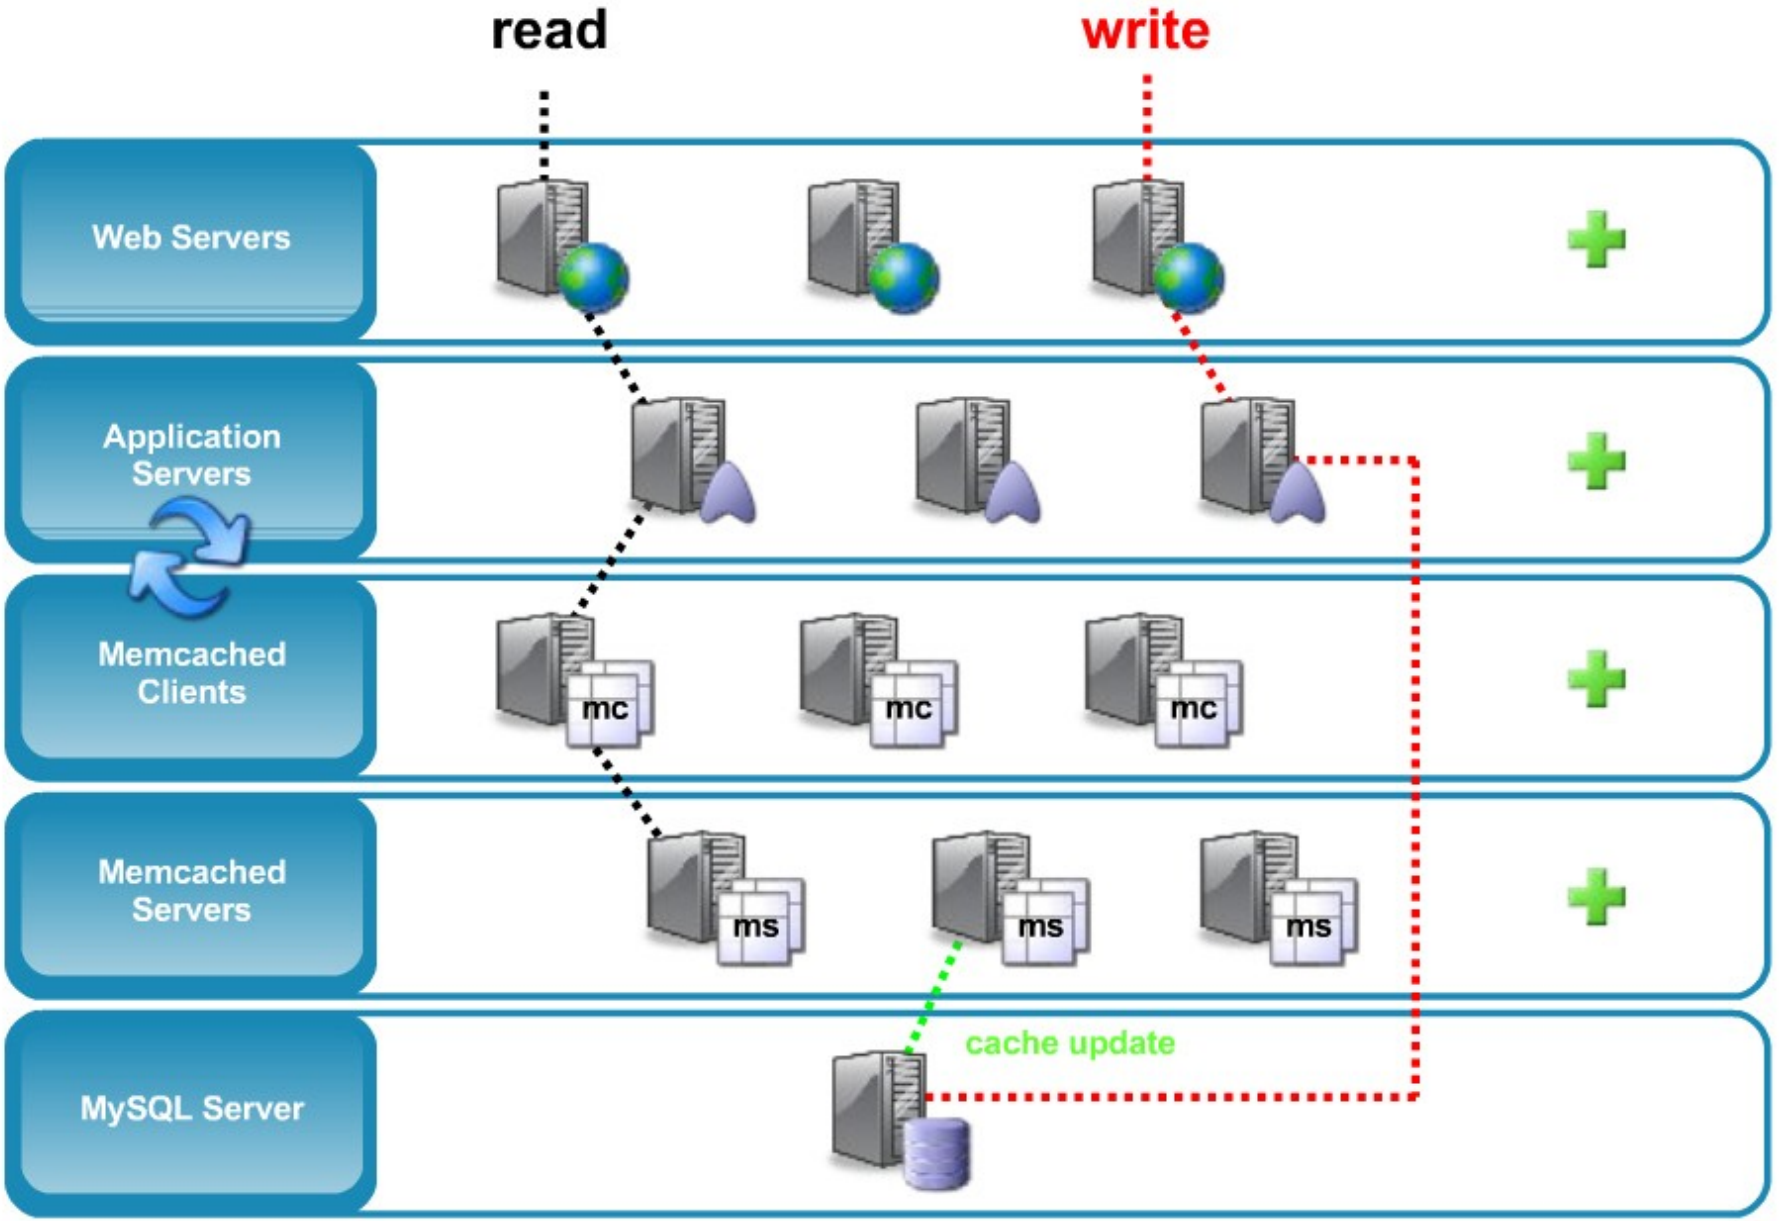

Source: http://mashraqi.com/2008/07/memcached-for-mysql-advanced-use-cases_09.html

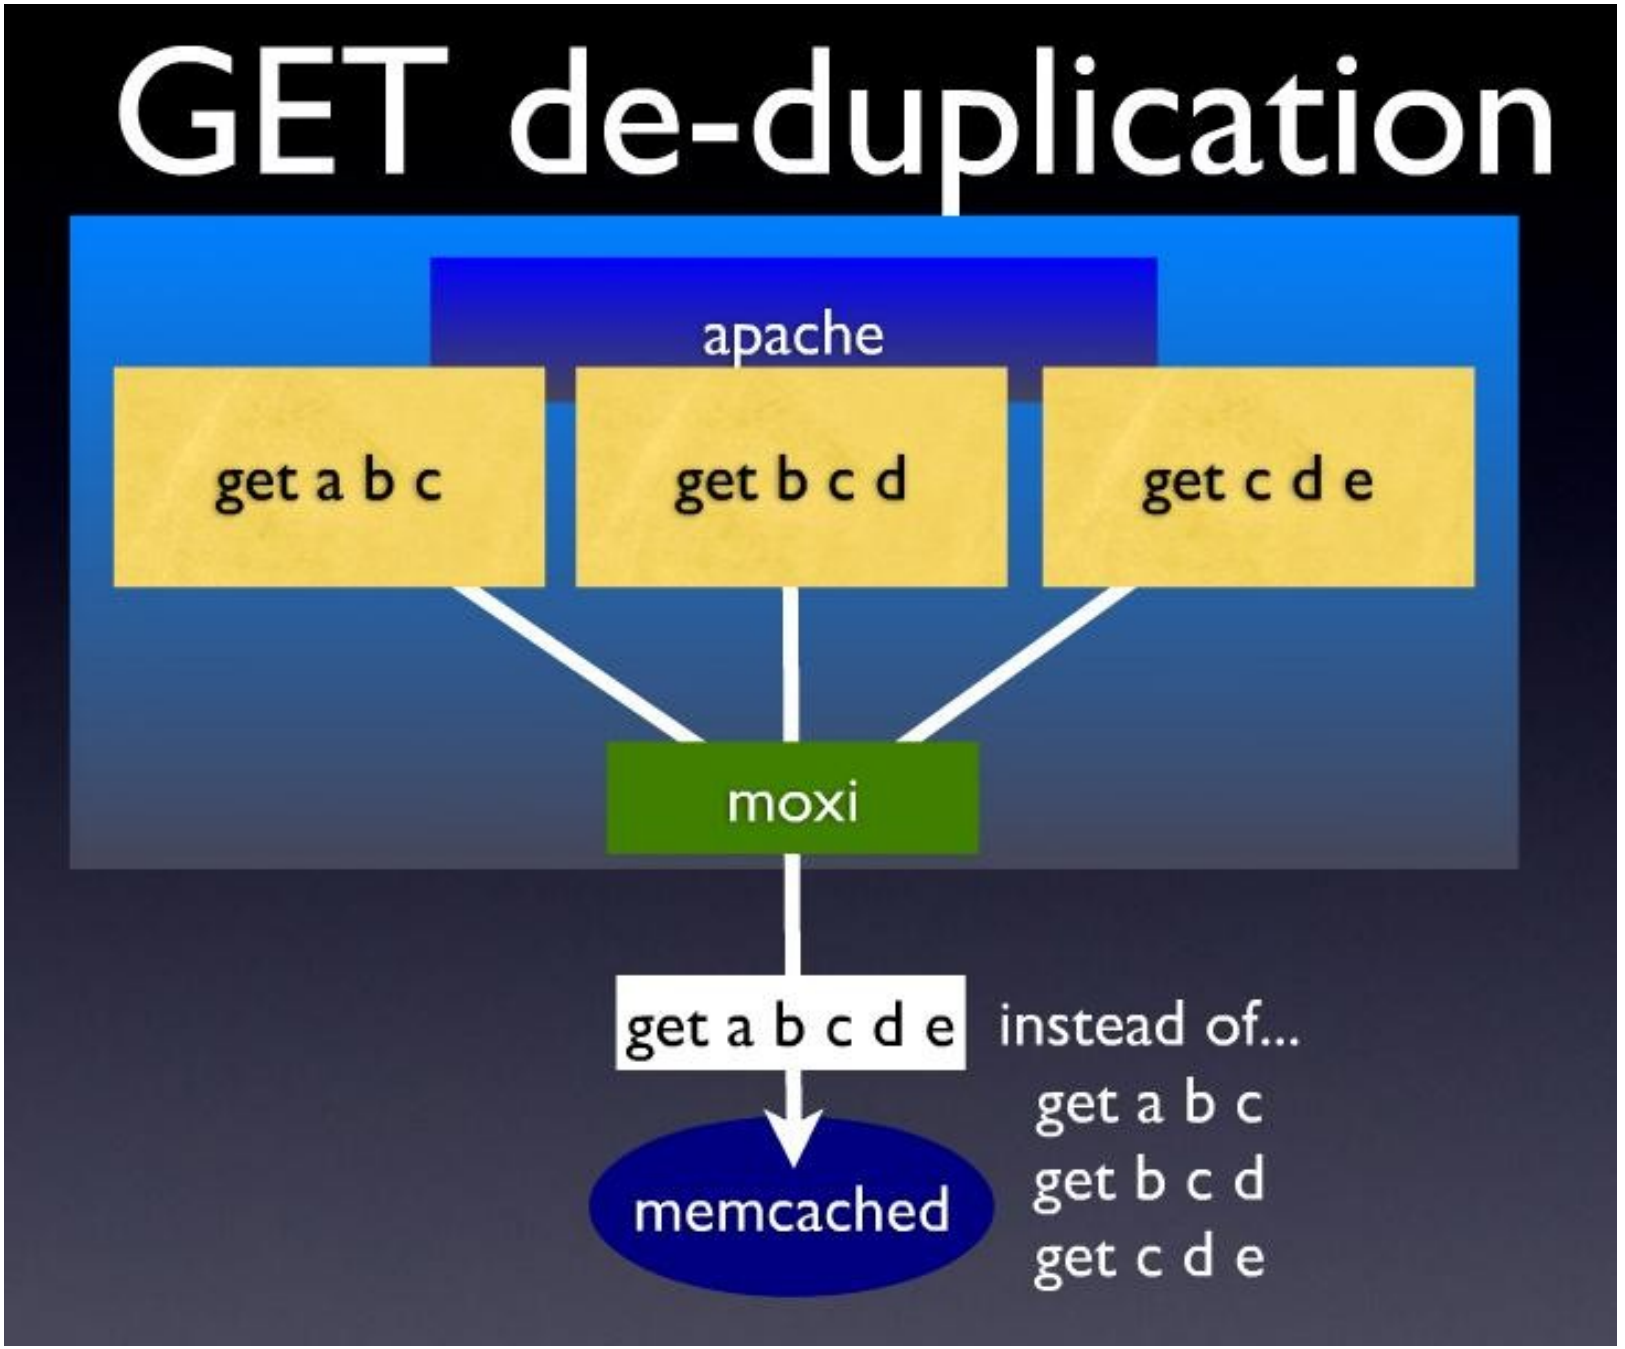

Source: http://www.slideshare.net/northscale/moxi-memcached-proxy

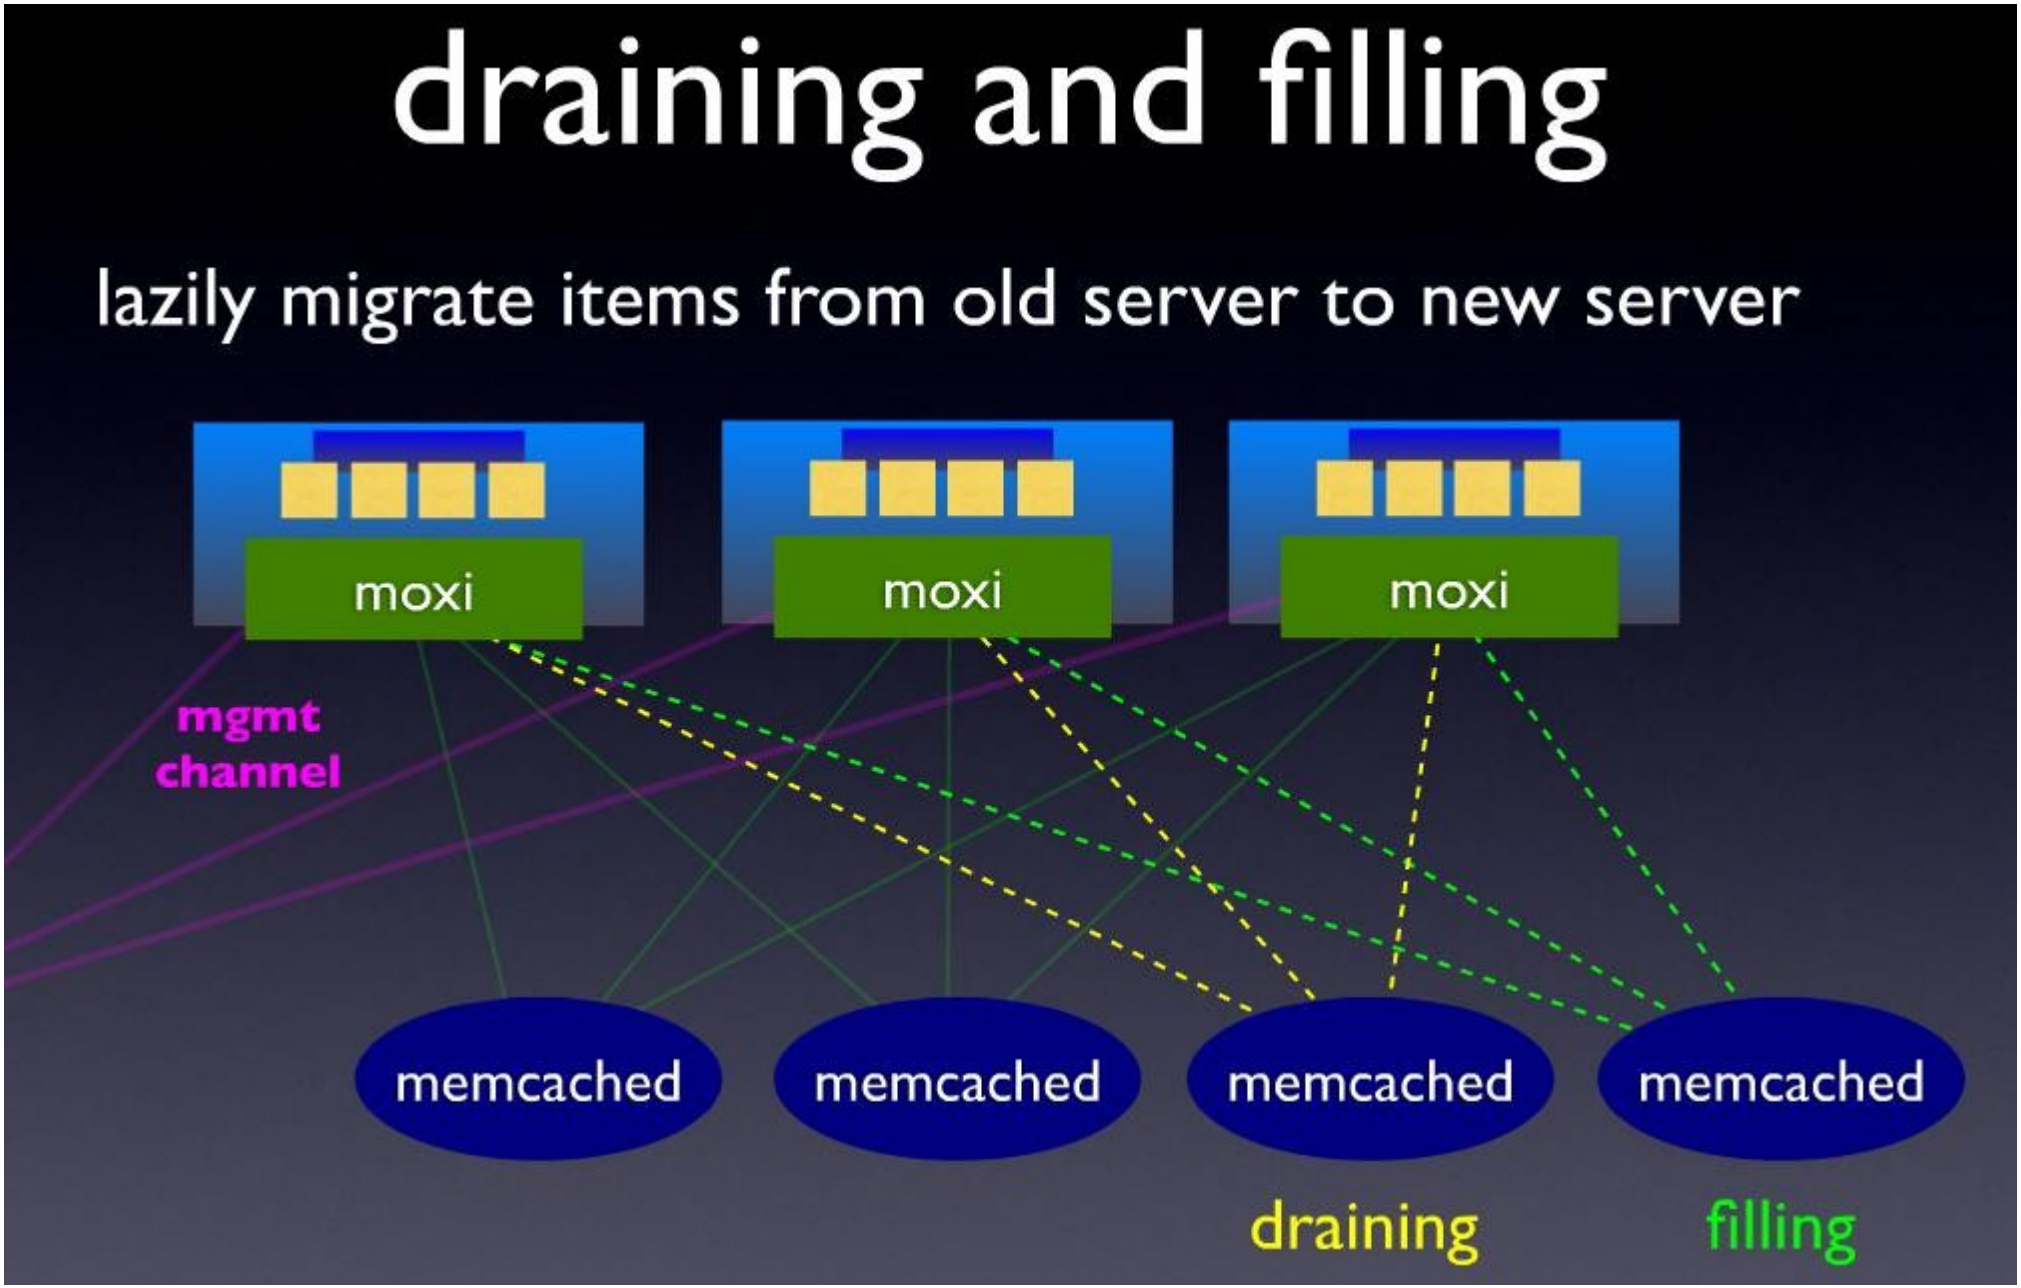

Source: http://www.slideshare.net/northscale/moxi-memcached-proxy

HBase is ..

- HBase is a distributed column-oriented database built on top of HDFS.
- A distributed data store that can scale horizontally to 1,000s of commodity servers and petabytes of indexed storage.
- Designed to operate on top of the Hadoop distributed file system (HDFS) or Kosmos File System (KFS, aka Cloudstore) for scalability, fault tolerance, and high availability.
- Integrated into the Hadoop map-reduce platform and paradigm.

Benefits

- Distributed storage
- Table-like in data structure
  - multi-dimensional map
- High scalability
- High availability
- High performance

Who use HBase

- Adobe
  - 內部使用 (Structure data)
- Kalooga
  - 圖片搜尋引擎 http://www.kalooga.com/
- Meetup
  - 社群聚會網站 http://www.meetup.com/
- Streamy
  - Migrate from MySQL to Hbase http://www.streamy.com/
- Trend Micro
  - 雲端掃毒架構 http://trendmicro.com/
- Yahoo!
  - 儲存文件 fingerprint 避免重複 http://www.yahoo.com/
- More - http://wiki.apache.org/hadoop/Hbase/PoweredBy

Backdrop

- Started toward by Chad Walters and Jim
- 2006.11
  - Google releases paper on BigTable
- 2007.2
  - Initial HBase prototype created as Hadoop contrib.
- 2007.10
  - First useable HBase
- 2008.1
  - Hadoop become Apache top-level project and HBase becomes subproject
- 2008.10~
  - HBase 0.18, 0.19 released

HBase Is Not …

- Tables have one primary index, the *row key*.
- No join operators.
- Scans and queries can select a subset of available columns, perhaps by using a wildcard.
- There are three types of lookups:
  - Fast lookup using row key and optional timestamp.
  - Full table scan
  - Range scan from region start to end.

HBase Is Not …(2)

- Limited atomicity and transaction support.
  - HBase supports multiple batched mutations of single rows only.
  - Data is unstructured and untyped.
- No accessed or manipulated via SQL.
  - Programmatic access via Java, REST, or Thrift APIs.
  - Scripting via JRuby.

Why Bigtable?

- Performance of RDBMS system is good for transaction processing but for very large scale analytic processing, the solutions are commercial, expensive, and specialized.
- Very large scale analytic processing
  - Big queries – typically range or table scans.
  - Big databases (100s of TB)

Why Bigtable? (2)

- Map reduce on Bigtable with optionally Cascading on top to support some relational algebras may be a cost effective solution.
- Sharding is not a solution to scale open source RDBMS platforms
  - Application specific
  - Labor intensive (re)partitionaing

Why HBase ?

- HBase is a Bigtable clone.
- It is open source
- It has a good community and promise for the future
- It is developed on top of and has good integration for the Hadoop platform, if you are using Hadoop already.
- It has a Cascading connector.

HBase benefits than RDBMS

- *No real indexes*
- *Automatic partitioning*
- *Scale linearly and automatically with new nodes*
- *Commodity hardware*
- *Fault tolerance*
- *Batch processing*

Data Model

- Tables are sorted by Row
- Table schema only define it's *column families* .
  - Each family consists of any number of columns
  - Each column consists of any number of versions
  - Columns only exist when inserted, NULLs are free.
  - Columns within a family are sorted and stored together
- Everything except table names are byte[]
- (Row, Family: Column, Timestamp) → Value

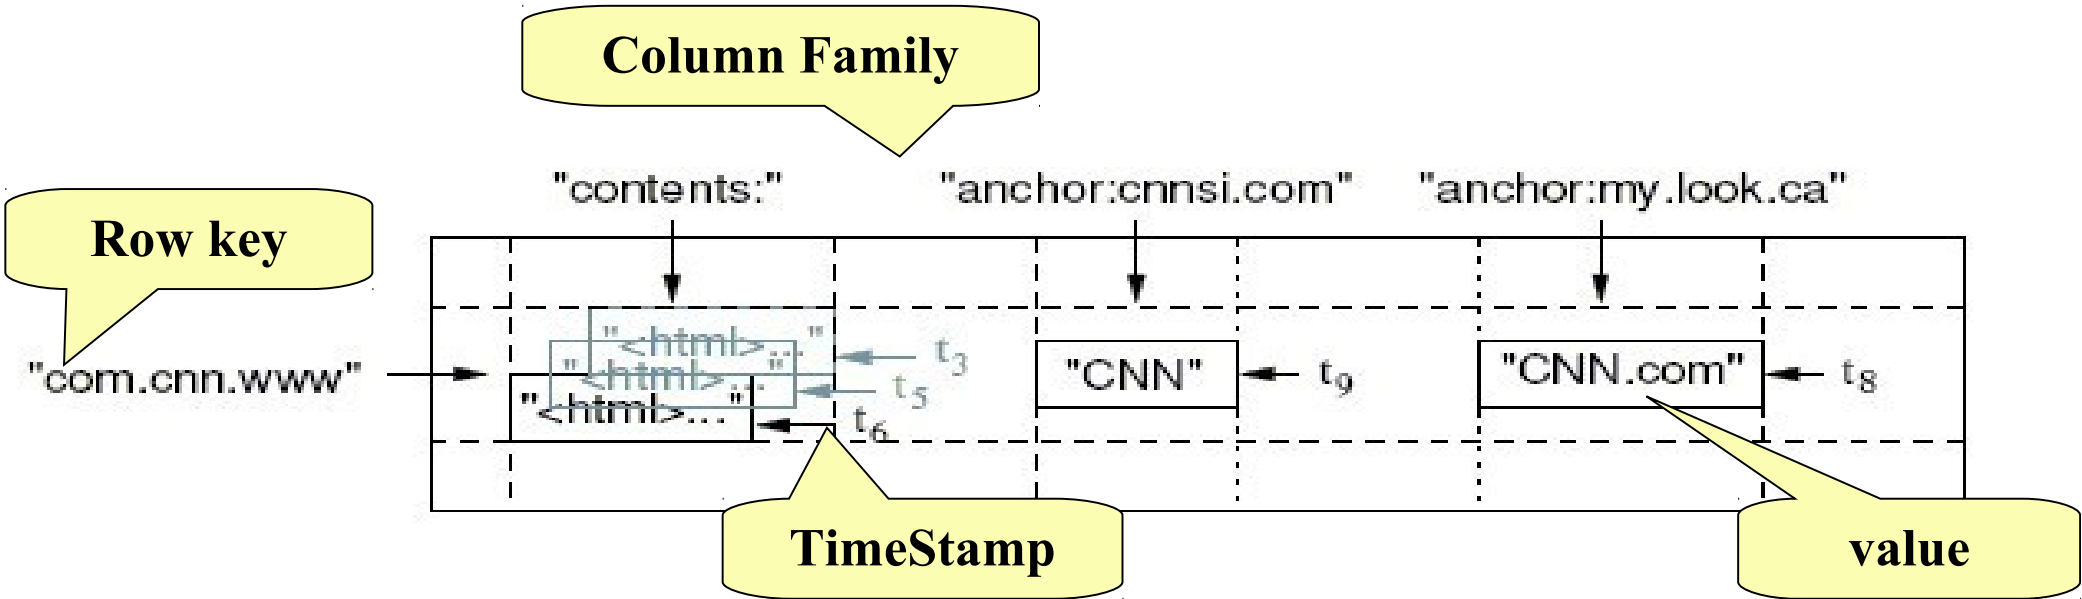

Members

- *Master*
  - Responsible for monitoring region servers
  - Load balancing for regions
  - Redirect client to correct region servers
  - The current SPOF
- *regionserver* slaves
  - Serving requests(Write/Read/Scan) of Client
  - Send HeartBeat to Master
  - Throughput and Region numbers are scalable by region servers

Architecture

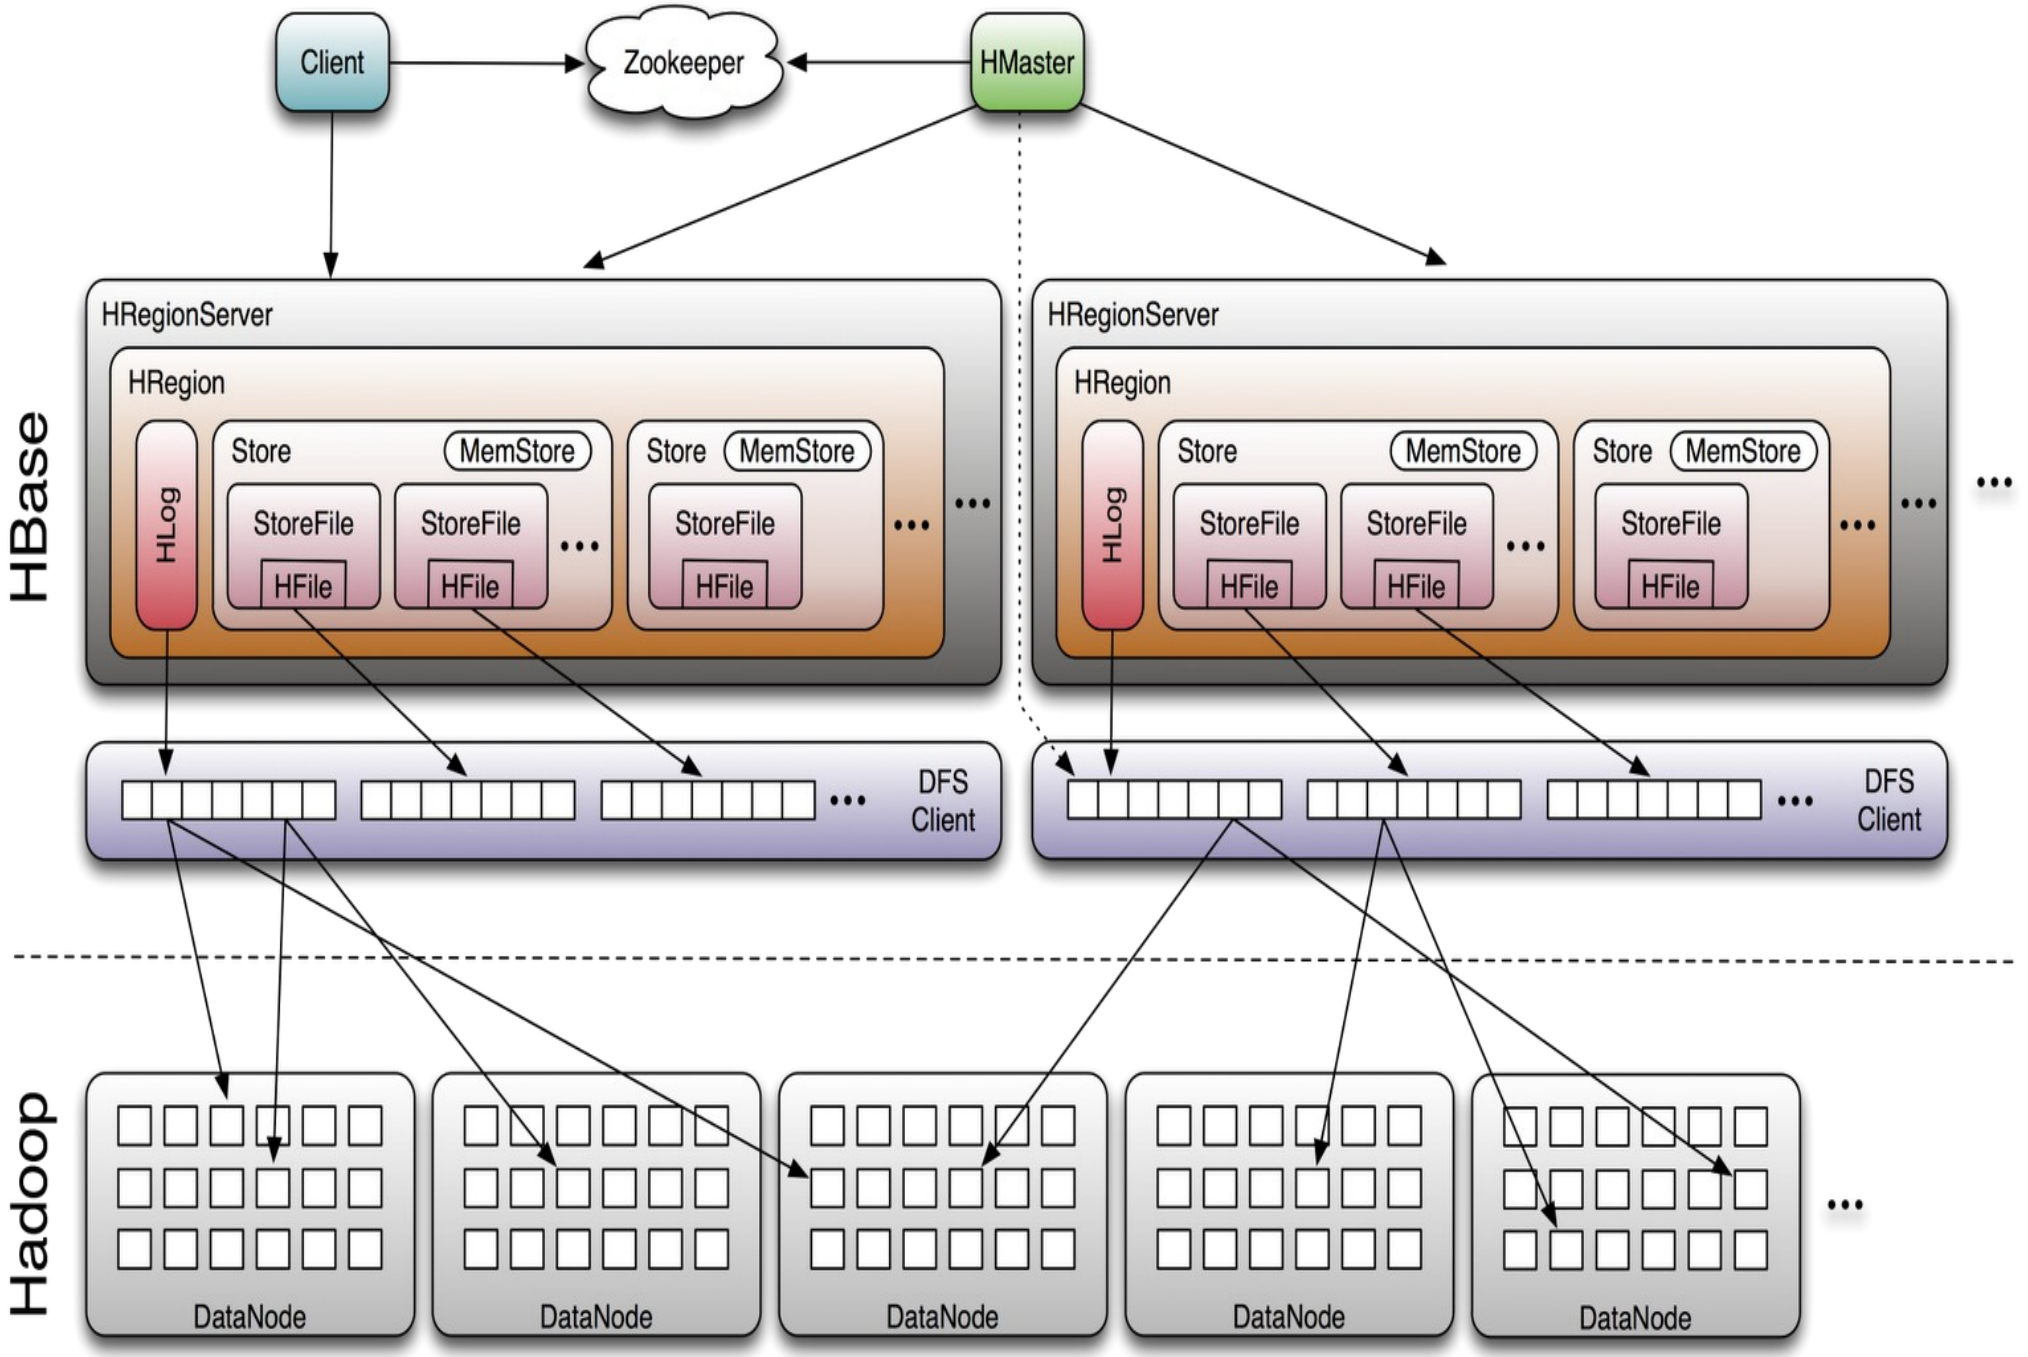

ZooKeeper

- HBase depends on ZooKeeper (Chapter 13) and by default it manages a ZooKeeper instance as the authority on cluster state

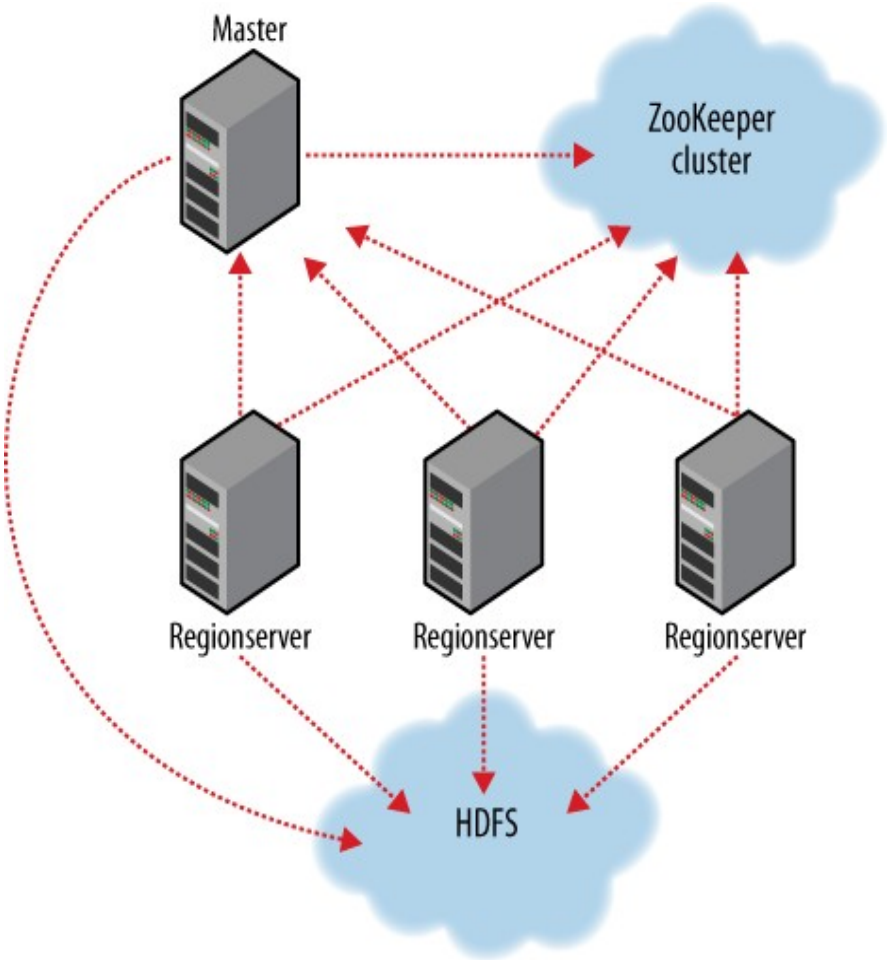

Operation

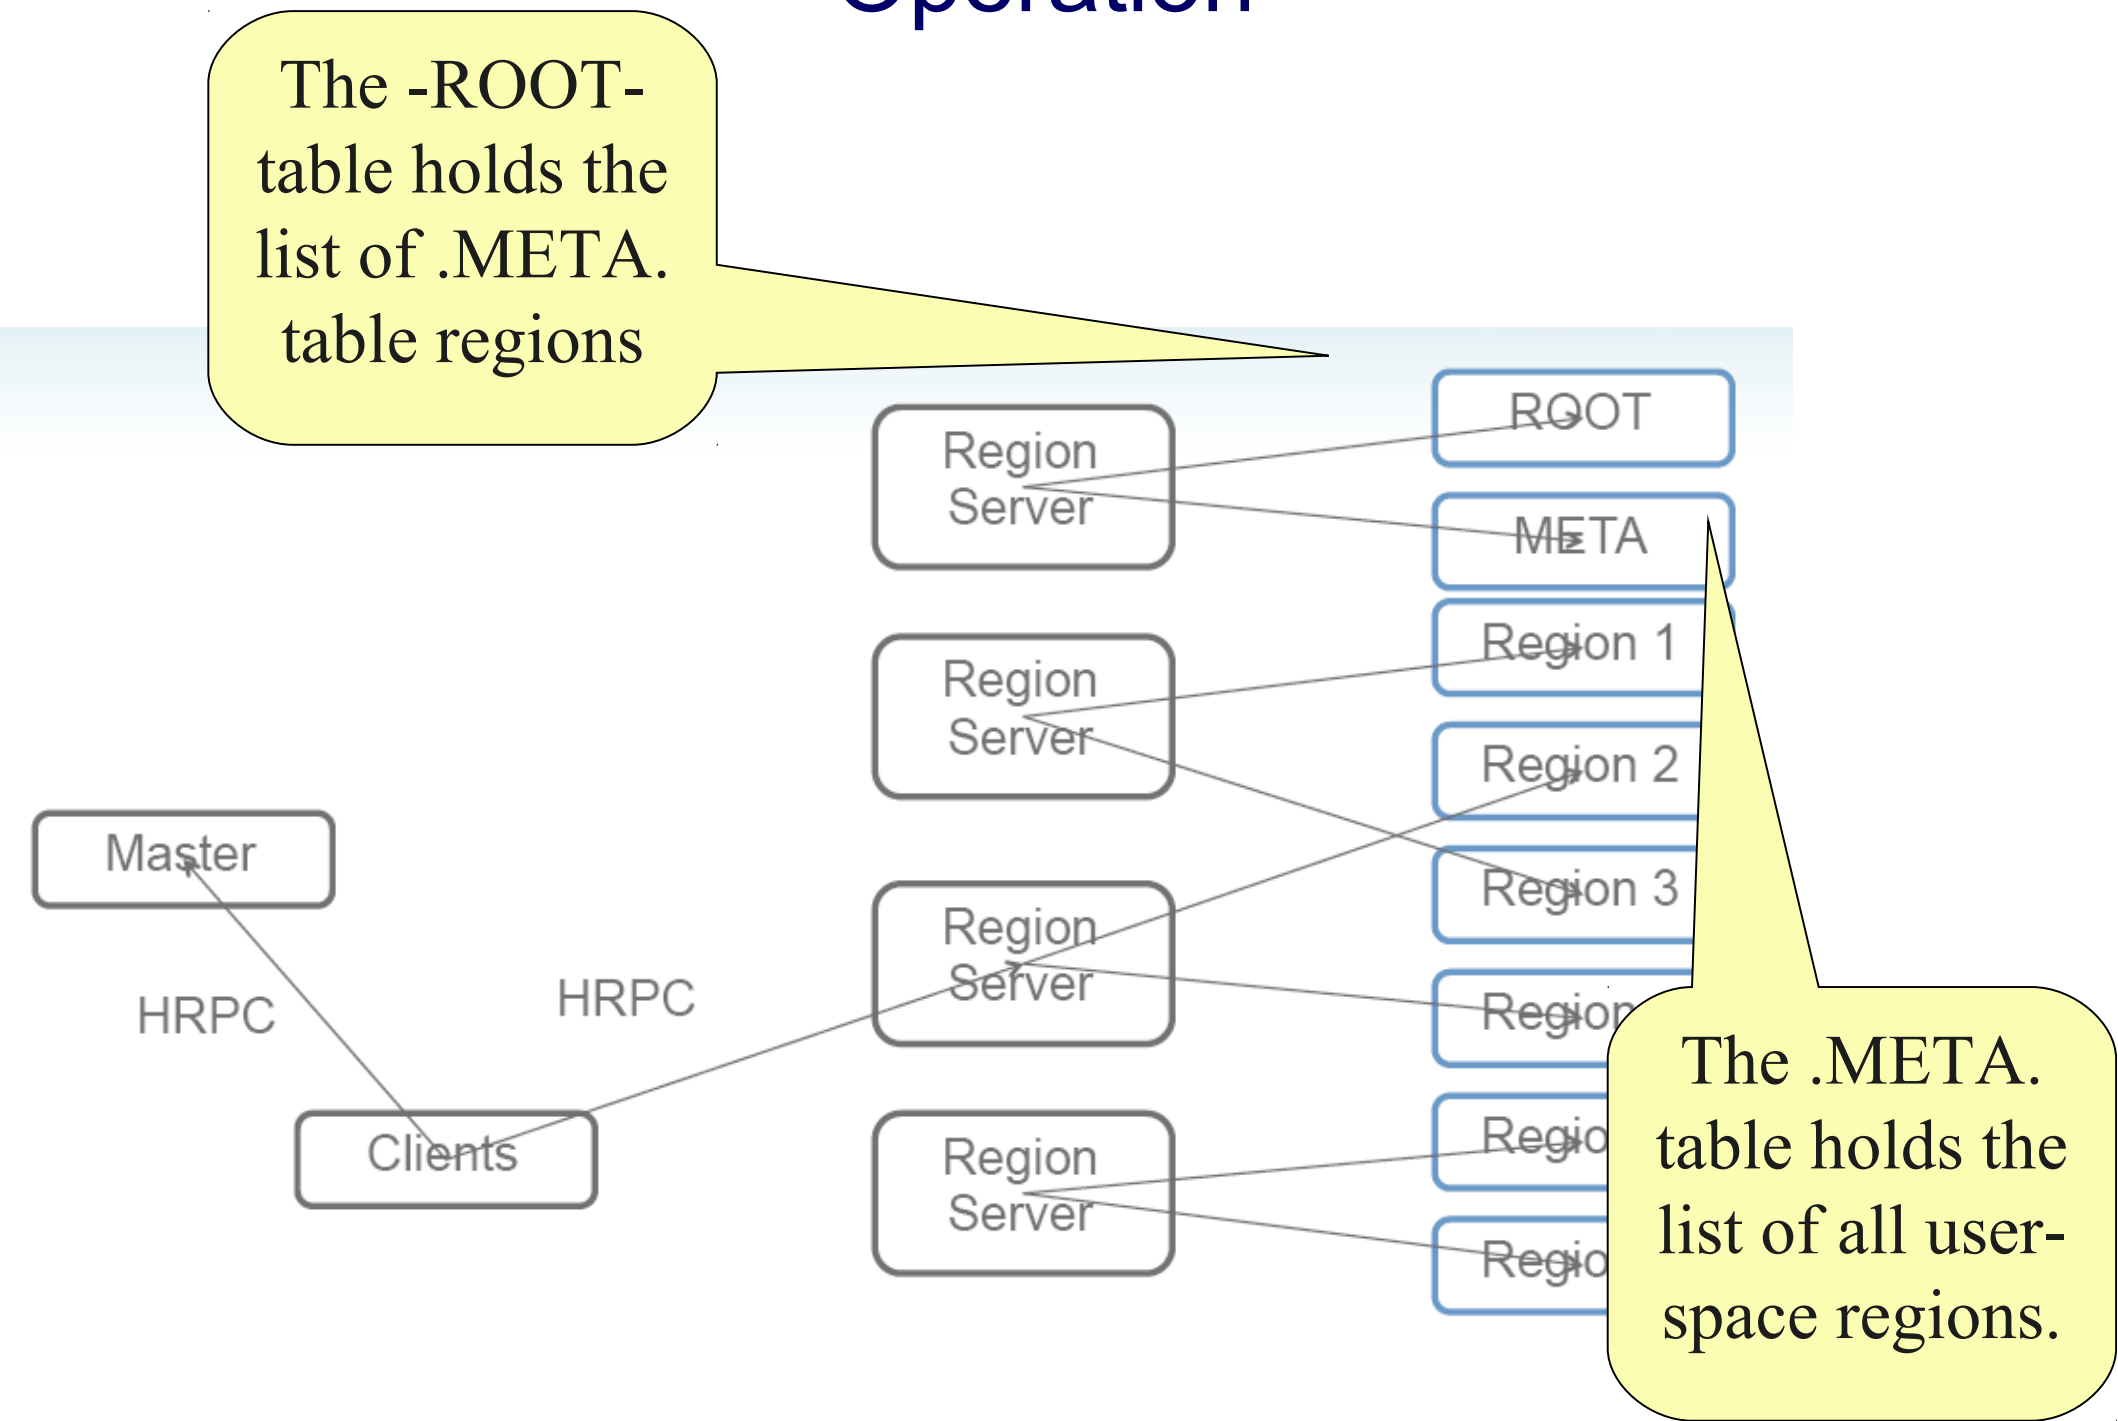
The -ROOT- table holds the list of .META. table regions
Region Server
Region Server
Region Server
Region Server
ROOT
META
Region 1
Region 2
Region 3
Region
Region
Region
Master
HRPC
HRPC
Clients
The .META. table holds the list of all user-space regions.

Questions?

Slides - http://trac.nchc.org.tw/cloud

Jazz Wang
Yao-Tsung Wang
jazz@nchc.org.tw

Powered by DRBL